

## Descriere articol

- Verbindungselement zum vereinfachten Aneinanderreihen von LED-Platinen
- Einfache Handhabung durch direktes Stecken und Trennen ohne Drückerbetätigung

Supus modificărilor.

WAGO Kontakttechnik GmbH & Co. KG  
/Representative Office Romania  
Sos. Pipera-Tunari nr. 1/1  
building 1, 2nd floor | 077190 Voluntari, Ilfov  
Tel.: +40-(0)31 421 85 68 | Email: info-RO@wago.com

Aveți întrebări despre produsele noastre?  
Vă stăm la dispoziție pentru preluarea apelului la +40 (0) 31 421 85 68.

**Recommendation:**

Nur geeignet für 2060-45x, nicht für 2060-40x

**Date**

**Electrical data**

**Ratings per IEC/EN 60664-1**

| Ratings per                 | IEC/EN 60664-1   |
|-----------------------------|--|
| Nominal voltage (III/3)     | 63 V   |
| Rated surge voltage (III/3) | 2,5 kV   |
| Rated voltage (III/2)       | 160 V  |
| Rated surge voltage (III/2) | 2,5 kV   |
| Nominal voltage (II/2)      | 320 V  |
| Rated surge voltage (II/2)  | 2,5 kV   |
| Rated current               | 9 A  |
| Legend (ratings)            | (III / 2) $\triangleq$ Overvoltage category III / Pollution degree 2 |

**Approvals per UL 1059**

|               |         |
|---------------|---------|
| Approvals per | UL 1059 |
|---------------|---------|

**Approvals per UL 1977**

|                       |       |
|-----------------------|-------|
| Rated voltage UL 1977 | 250 V |
| Rated current UL 1977 | 9 A   |

**Connection data**

|                            |   |
|----------------------------|---|
| Pole No.                   | 2 |
| Total number of potentials | 2 |
| Number of connection types | 1 |

**Geometrical Data**

|             |                     |
|-------------|---------------------|
| Pin spacing | 4 mm / 0.157 inch   |
| Width       | 7,4 mm / 0.291 inch |
| Height      | 2,6 mm / 0.102 inch |
| Depth       | 28 mm / 1.102 inch  |

Supus modificărilor.



## Mechanical data

|                         |  |
|-------------------------|--|
| Mating cycles (max.)    | 10                                       |
| Number of mating cycles | max. 10 connections/disconnections       |
| Suitable                | for SMD PCB terminal blocks; 2060 Series |

## Material Data

|                             |                      |
|-----------------------------|----------------------|
| Color                       | black                |
| Material group              | I                    |
| Insulation material         | Polyamide 66 (PA 66) |
| Flammability class per UL94 | V0                   |
| Contact material            | Copper alloy         |
| Contact plating             | silver-plated        |
| Weight                      | 0,5 g                |

## Environmental Requirements

|                         |                 |
|-------------------------|-----------------|
| Limit temperature range | -60 ... +105 °C |
|-------------------------|-----------------|

## Commercial data

|                       |               |
|-----------------------|---------------|
| Packaging type        | BOX           |
| Country of origin     | CN            |
| GTIN                  | 4055143959940 |
| Customs tariff number | 85369010000   |

## Counterpart

## Descărcări

### Documentation


#### Additional Information

|                        |             |               |            |
|------------------------|-------------|---------------|------------|
| Technical explanations | Apr 3, 2019 | pdf<br>3,6 MB | Descărcare |
|------------------------|-------------|---------------|------------|

## Installation Notes


### Installation

Supus modificărilor.

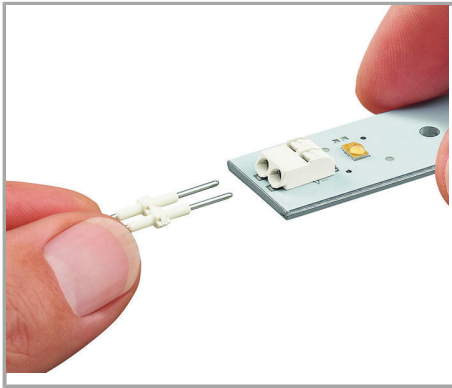

Inserting a board-to-board link into the terminal block.


#### Installation

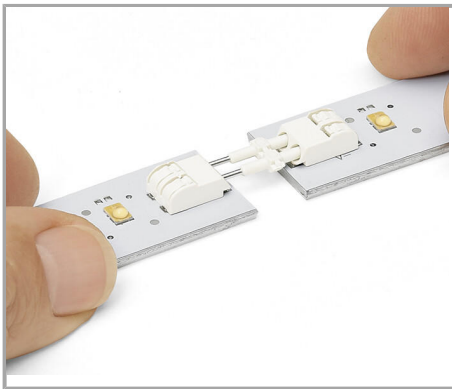

Assembly: Place PCBs on a flat surface and connect terminal blocks on adjoining PCBs via board-to-board link. Disassembly: Pull PCBs apart (max. 10 mating cycles).

#### Installation

Supus modificărilor.

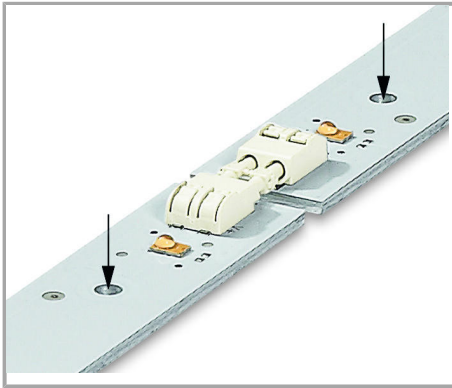

The PCBs must be secured.

Supus modificărilor.