

General characteristics

Family name	Krona
Luminaire type	Elevation luminaire
Integrated driver	Yes
LED manufacturer	San'an
Installation options	Surface
Intelligent control	No
Certificates	CE, RoHS
Warranty	2 years
Materials	PC, ABS

Rated parameters

Rated power	6W
Rated luminous flux	240lm, 260lm
Rated lifetime	20 000h
Rated luminous intensity	98cd
Rated beam angle	120°

Light technical characteristic

Luminaire luminous flux	240lm, 260lm
Color temperature	4000K
CRI	>80
Beam angle	120°
Color consistency	<6SDCM

Electrical characteristics

Wattage	6W
Voltage	230V
Voltage frequency	50Hz
Power factor	>0,5
Energy efficiency label	A+


Operating characteristics

Lifetime	20 000h
Switching cycle	>20 000
LLMF	>0,7
IP	65
IK	08
Warm up time	negligible
Starting time	<0,5s
Working temperature	from -25° to 50°C
Storage temperature	from -25° to 50°C

LIL062



LIL061

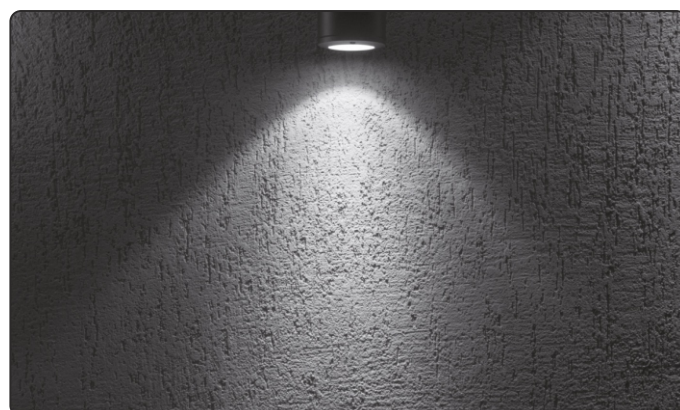

index	type	power	luminous flux	color temperature	beam angle	IP	weight net/gross	lamp size	packing size
LIL061	round	6W	240lm	4000K	120°	65	0,425kg/0,479kg	L170xW113xH90mm	L180xW120xH100mm
LIL062	square	6W	260lm	4000K	120°	65	0,475kg/0,533kg	L170xW113xH90mm	L180xW120xH100mm