

Chei locas hexagonal izolate la 1000 V

220/3LVDEDP



Profile



Caracteristicile produsului

- material:crome vanadium
- capul cheii este tratat in intregime
- in concordanta cu standardul EN 60900:2004

Avantaje:


- dublu strat-dubla protectie, doua straturi de culori diferite
- 100% control - fiecare piesa este testata

Important

- daca al doilea strat devine vizibil inlocuiti scula VDE cu una noua

Standarde

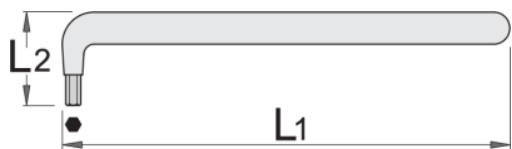


EN60900:2005




L1



L2

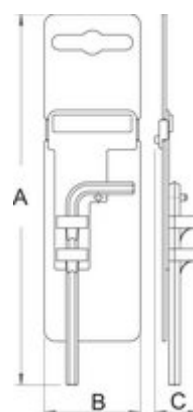


		L1	L2	
619136	3	130	26	20
619137	4	145	31	31
619138	5	165	36	53
619139	6	188	40	73
619140	8	206	49	135
619141	10	234	55	221
619142	12	262	58	346







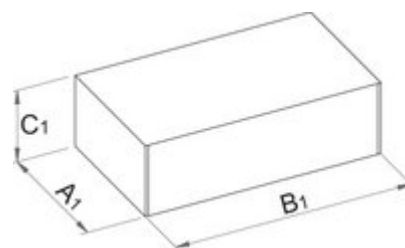

Ambalaj pentru retail

	MA	MB	MC	
619136	200	44	17	23
619137	220	44	17	36
619138	235	44	17	53
619139	260	48	17	80
619140	280	55	20	141
619141	305	57	20	230
619142	335	65	20	330



Ambalaj pentru transport

		TA	TB	TC	
619136	4	71	243	42	130
619137	4	71	243	42	180
619138	4	71	243	42	250

		TA	TB	TC	
619139	4	75	278	54	370
619140	4	75	308	60	620
619141	4	85	337	68	1000
619142	4	85	377	73	1480