

Prelungitor izolat la 1000 V, 3/8"

238.4/2VDEDP



Profile



Caracteristicile produsului

- material:crome vanadium
- forjata, calire si revenire totala
- cap:cromat in concordanta cu ISO 1456:2009
- in concordanta cu standardul EN 60900:2004

Avantaje:

- dublu strat-dubla protectie, doua straturi de culori diferite
- 100% control - fiecare piesa este testata





Important


- daca al doilea strat devine vizibil inlocuiti scula VDE cu una noua

Standarde



EN60900:2005

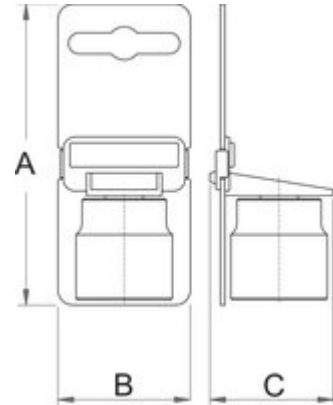


|  |  |  | L | D |  |
|---|--|--|-----|----|--|
| 619169 | 3/8" | 125 | 144 | 17 | 151 |
| 619170 | 3/8" | 250 | 268 | 17 | 281 |






Ambalaj pentru retail
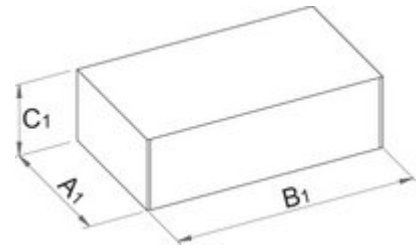
|  | MA | MB | MC |  |
|--|-----|----|----|---|
| 619169 | 216 | 44 | 33 | 152 |
| 619170 | 345 | 44 | 33 | 287 |



Ambalaj pentru transport

|  |  | TA | TB | TC |  |
|--|---|-----|-----|----|---|
| 619169 | 4 | 85 | 288 | 52 | 666 |
| 619170 | 4 | 145 | 358 | 48 | 1250 |