

Antrenor cu clichet pneumatic

1552



0



Profile



Caracteristicile produsului

- Turatia in gol:150rot/min
- Cuplu maxim 90Nm
- Presiune nominala de lucru:6.2bar
- consum de aer 113l/min
- Racord de aer 1/4"

Avantaje:

- cap de clichet cu pereti subtiri
- Rulmenti cu bile
- Maner ergonomic cauciucat
- Regulator nou de presiune
- racord pivotant de aer 360°
- evacuare aer prin spate
- Nivel de zgomot scazut 79dB(A)
- unealta mica si compacta
- uzinare de calitate
- comutator de pornire comod
- reglarea rapidă și comoda a sensului de rotație


Utilizare:

- industria auto
- industria aerospatiala

- echipament agricol
- industria grea
- constructia de masini
- industria de constructii navale
- montari individuale

Important

- Folosirea capetelor de impact UNIOR este recomandata

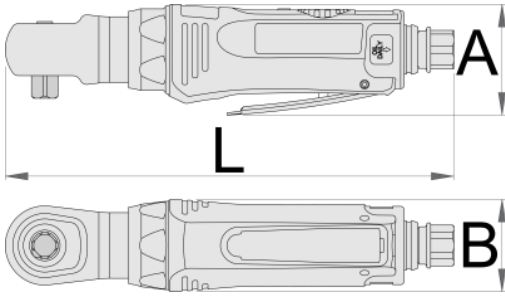

		L	A	B		
627567	1/2"	256	56	47,8	90	1332

Ambalaj pentru retail

	MA	MB	MC	
627567				

Ambalaj pentru transport

		TA	TB	TC	
627567					