


Antrenor reversibil pneumatic 1/2"

1551



Profile

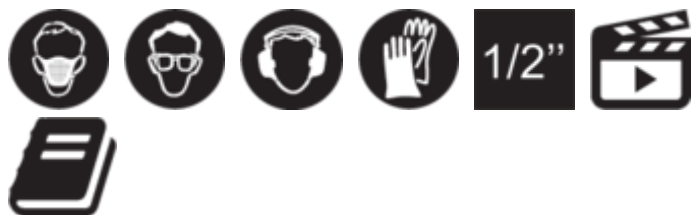

Caracteristicile produsului

- viteza de rotatie 160 rot/min
- Moment de torsiune max. 81 Nm
- Presiunea maxima de aer comprimat: 6, 2 Bar
- Consum de aer comprimat 113 l/min
- Racord de aer 1/4"
- Diametrul maxim de strangere M10

Avantaje:

- scula mica si compacta
- calitatea productiei
- maner rotitor
- reglare rapida si usoara a sensului de rotatie
- supapa de protectie previne intrarea necontrolata a aerului in scula


Utilizare:

- industria auto
- industria aerospatiala
- echipament agricol
- industria grea


- constructia de masini
- industria de constructii navale
- montari individuale

Important

- Folosirea capetelor de impact UNIOR este recomandata

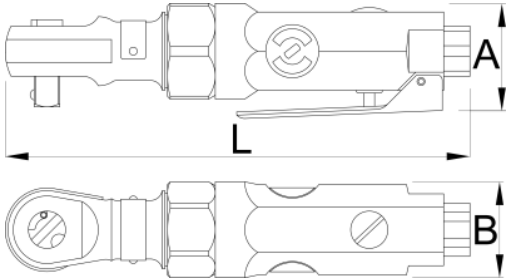

Barcode	Symbol	L	A	B	Nm	Weight
615319	1/2"	254	45	41	81	1370

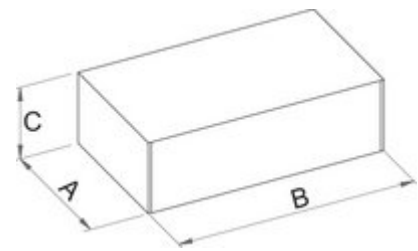

Ambalaj pentru retail

Barcode	MA	MB	MC	Weight
615319	71	290	60	1440

Ambalaj pentru transport

Barcode	Quantity	TA	TB	TC	Weight
615319	1				