

Antrenor reversibil pneumatic 3/8"

1531



0



Profile



Caracteristicile produsului

- viteza de rotatie 250 rot/min
- Moment de torsiune max. 27 Nm
- Presiunea maxima de aer comprimat: 6, 2 Bar
- Consum de aer comprimat 62 l/min
- Racord de aer 1/4"
- Diametrul maxim de strangere M 6

Avantaje:

- scula mica si compacta
- calitatea productiei
- maner rotitor
- reglare rapida si usoara a sensului de rotatie
- supapa de protectie previne intrarea necontrolata a aerului in scula


Utilizare:

- industria auto
- industria aerospatiala


- echipament agricol
- industria grea
- constructia de masini
- industria de constructii navale
- montari individuale

Important

- Folosirea capetelor de impact UNIOR este recomandata

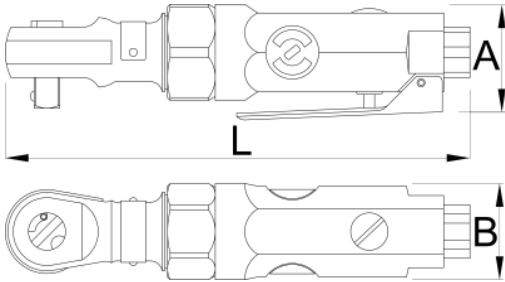

Barcode	Symbol	L	A	B	Nm	Icon
615318	3/8"	165	37	41	54	520

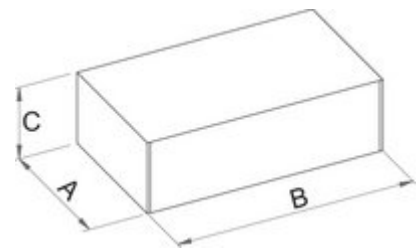

Ambalaj pentru retail

Barcode	MA	MB	MC	Icon
615318	145	170	40	590

Ambalaj pentru transport

Barcode	Icon	TA	TB	TC	Icon
615318	1				