


Pistol pneumatic 1/2"

1562



Profile

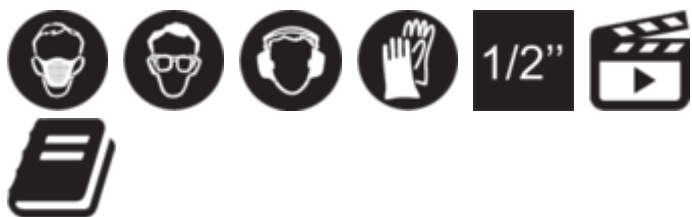

Caracteristicile produsului

- viteza de rotatie 6500 rot/min
- Moment de torsiune max. 813 Nm
- Presiunea maxima de aer comprimat: 6, 2 Bar
- Consum de aer comprimat 124 l/min
- Racord de aer 1/4"
- Diametrul maxim de strangere M18

Avantaje:


- moment de torsiune controlat
- insurubare rapida
- o diversitate de utilizari

Utilizare:


- industria auto
- industria aerospaciala
- echipament agricol
- industria grea
- constructia de masini
- industria de constructii navale
- montari individuale

Important

- Folositi intotdeauna capetele chei tubulare de impact UNIOR

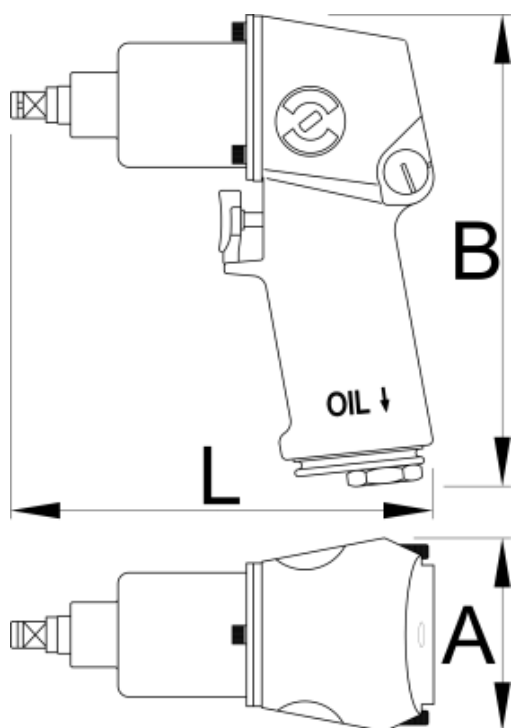

		L	A	B		
615321	1/2"	204	70	192	949	2800

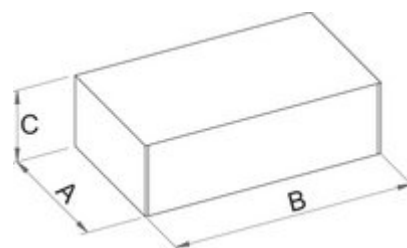

Ambalaj pentru retail

	MA	MB	MC	
615321	192	204	80	2870

Ambalaj pentru transport



615321



1

TA

TB

TC

