


# Pistol pneumatic 3/4"

1571



## Profile

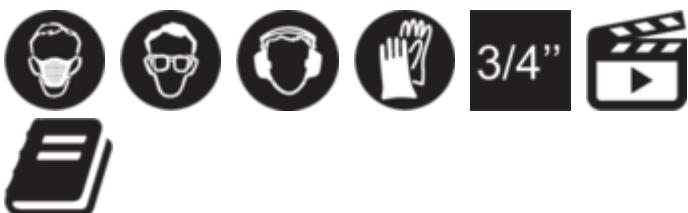

## Caracteristicile produsului

- viteza de rotatie 6500 rot/min
- Moment de torsiune max. 1016 Nm
- Presiunea maxima de aer comprimat: 6, 2 Bar
- Consum de aer comprimat 198 l/min
- Racord de aer 1/4"
- Diametrul maxim de strangere M 24

## Avantaje:

- moment de torsiune controlat
- insurubare rapida


- o diversitate de utilizari

### Utilizare:

- industria auto
- industria aerospatiala
- echipament agricol
- industria grea
- constructia de masini
- industria de constructii navale
- montari individuale

### Important

- Folositi intotdeauna capetele chei tubulare de impact UNIOR

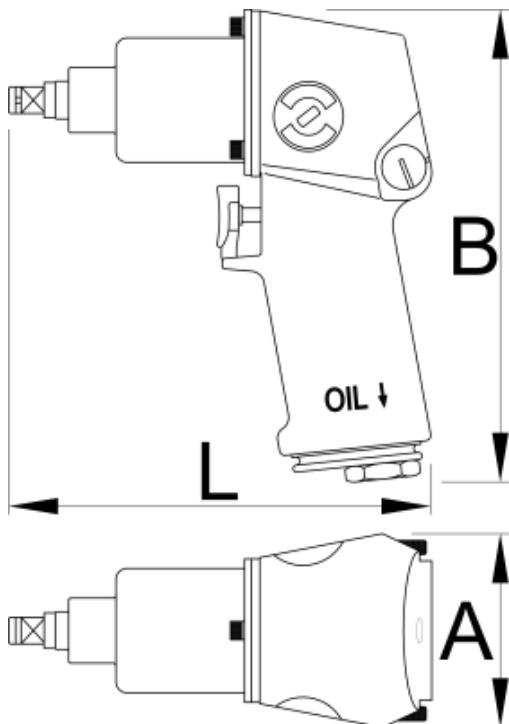

|  |  |   |   |   |  |  |
|--|--|---|---|---|--|--|
|  |  | L | A | B |  |  |
|--|--|---|---|---|--|--|

615324

3/4"


236

80

240

1085

4550

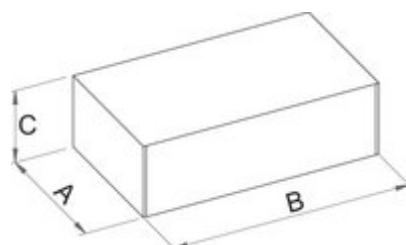

### Ambalaj pentru retail

|  |    |    |    |  |
|--|----|----|----|--|
|  | MA | MB | MC |  |
|--|----|----|----|--|

615324

105

236

260

4620

# Ambalaj pentru transport



TA

TB

TC



615324

1