


Ciocan pneumatic reversibil de 1.1/2"

1597



Profile

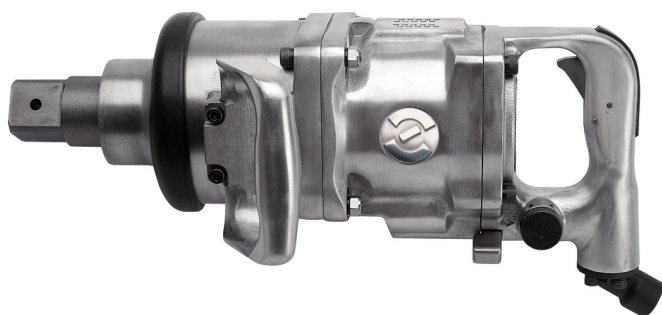

Caracteristicile produsului

- viteza de rotatie 3000 rot/min
- moment de torsiune max.4065 Nm
- Presiunea maxima de aer comprimat:6, 2 Bar
- consum de aer comprimat 435 l/min
- Racord de aer 1/2"
- diametrul maxim surub (piulita) M52

Avantaje:

- moment de torsiune controlat
- insurubare rapida
- o diversitate de utilizari


Utilizare:

- industria auto
- industria aerospatiala
- echipament agricol
- industria grea


- constructia de masini
- industria de constructii navale
- montari individuale

Important

- Folositi intotdeauna capetele chei tubulare de impact UNIOR

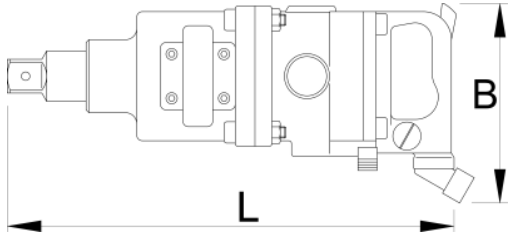

		B	L		
617691	1.1/2"	545	465	4065	18600

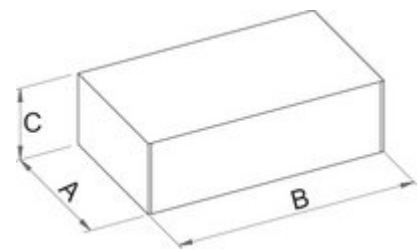

Ambalaj pentru retail

	MB	MA	MB	MC	
617691	545	270	545	160	18670

Ambalaj pentru transport

		TA	TB	TC	
617691	1				