

# Filtru regulator si ungator pneumatic 1/2"

1502




## Profile




## Caracteristicile produsului

- Racord de aer 1/2"
- presiune maxima de aer comprimat: 9,5 Bar
- presiunea de lucru 0,5 - 8,5 Bar
- temperatura de lucru 5 - 60 °C
- grad de filtrare 5 microni
- consum de aer comprimat 2300 l/min
- capacitate filtru 60ml
- capacitate ungator 90ml

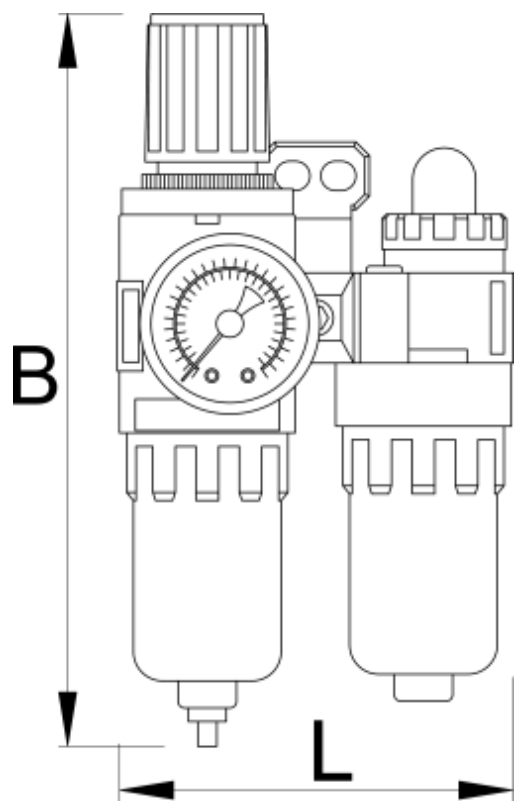

617737	L	B	1265
617737	150	220	1265

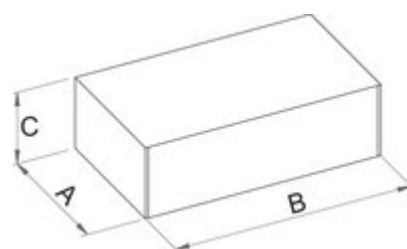

### Ambalaj pentru retail

617737	MA	MB	MC	1335
617737	157	270	78	1335

### Ambalaj pentru transport

617737	1	TA	TB	TC	1335
617737	1				1335

### Piese de schimb



Set de pahare pentru 1501 si 1502



Manometru de presiune pentru 1501 in 1502