


## N12H blue 12x16mm<sup>2</sup> IP20 Neutral terminal

<b>SKU</b>	MAD1012N15
<b>EAN</b>	4744397015112
<b>Color</b>	Blue
<b>Wire material</b>	Cu
<b>Cross-section min. (mm<sup>2</sup>)</b>	1,5
<b>Cross-section max. (mm<sup>2</sup>)</b>	16
<b>Input wire min. (mm<sup>2</sup>)</b>	1,5
<b>Input wire max. (mm<sup>2</sup>)</b>	16
<b>Output wire min. (mm<sup>2</sup>)</b>	1,5
<b>Output wire max. (mm<sup>2</sup>)</b>	16
<b>Number of connections</b>	12
<b>Nominal current (A)</b>	63
<b>Nominal voltage (V)</b>	690
<b>Service temperature (°C)</b>	85
<b>Material</b>	Brass, polyamide PA6
<b>Mounting method</b>	DIN rail
<b>Item width (mm)</b>	14
<b>Item length (mm)</b>	88
<b>Item height (mm)</b>	32

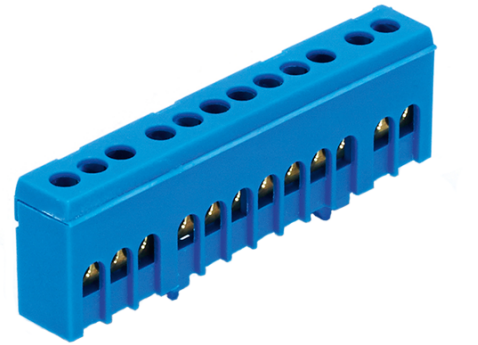

<b>Item weight (g)</b>	45
<b>Max. short-circuit current</b>	I <sub>cw</sub> =4,2 kA/1 s
<b>Rated surge voltage (kV)</b>	8
<b>Short-circuit resistance (kA/1s)</b>	4,2 kA/1 s
<b>Tightening torque (Nm)</b>	2,5 Nm
<b>IP rating</b>	IP20
<b>Certification</b>	EN 60998-1, EN 60998-2-1
<b>Flame resistance</b>	UL94 V2
<b>CN8 code</b>	85369001
<b>Package quantity (pcs)</b>	10