


## MC06 (1,5-6mm<sup>2</sup>) Modular terminal

<b>SKU</b>	MAH0006A24
<b>Color</b>	Transparent
<b>Wire material</b>	Cu
<b>Cross-section min. (mm<sup>2</sup>)</b>	1,5
<b>Cross-section max. (mm<sup>2</sup>)</b>	6
<b>Input wire min. (mm<sup>2</sup>)</b>	1,5
<b>Input wire max. (mm<sup>2</sup>)</b>	6
<b>Output wire min. (mm<sup>2</sup>)</b>	1,5
<b>Output wire max. (mm<sup>2</sup>)</b>	6
<b>Number of connections</b>	2
<b>Nominal current (A)</b>	24
<b>Nominal voltage (V)</b>	500
<b>Service temperature (°C)</b>	-20 to +90 °C
<b>Material</b>	Polycarbonate, brass
<b>Item width (mm)</b>	13,8
<b>Item length (mm)</b>	28
<b>Item height (mm)</b>	13,2
<b>Item weight (g)</b>	7
<b>Screw</b>	Hex 1,5

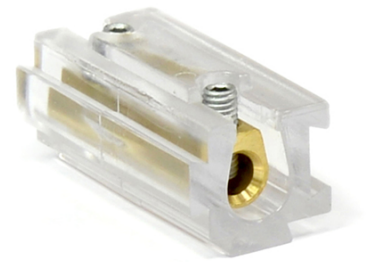

<b>Tightening torque (Nm)</b>	0,6
<b>Certification</b>	IEC/EN 60695-2-11; EN 60998-1:2004; EN 60998-2-1:2004; RoHS 2011/65/CE
<b>Flame resistance</b>	UL94 V2
<b>CN8 code</b>	85369010
<b>Package quantity (pcs)</b>	10