


## REVILO

wall and ceiling light, LED, 3000K, black, 15°

The REVILO is available in white and black. It has a cylindrical spotlight which can be individually directed via a joint. The swivel and tilting range allows you to optimally light up the room. The integrated premium LEDs provide high energy efficiency. The built-in LED constant current driver allows it to be directly connected to a 230V mains power supply.

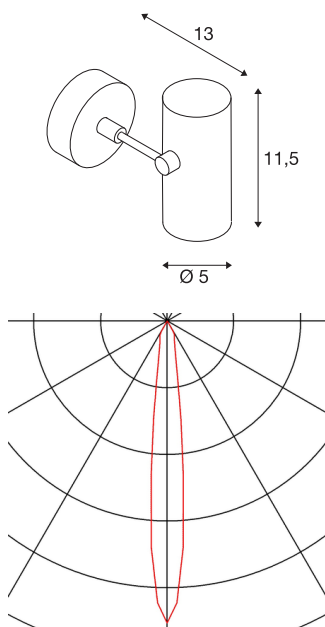

## TECHNICAL DATA

|                                     |                        |
|-------------------------------------|------------------------|
| Item no.:                           | 1000900                |
| Lamps included                      | 0                      |
| Number of different light outlets   | 1                      |
| Primary nominal voltage             | 100-240V ~50/60Hz mA/V |
| Secondary power / secondary voltage | 500 mA/V               |
| Vertical tilting range              | 180 °                  |
| Horizontal rotation range           | 350 °                  |
| Length                              | 11.5 cm                |
| Height                              | 13.0 cm                |
| Diameter                            | 5.0 cm                 |
| Net weight                          | 0.387 kg               |
| Gross weight                        | 0.487 kg               |
| IP Code                             | IP 20                  |
| Safety class                        | I                      |
| Assembly                            | Surface                |
| Assembly details                    | Ceiling, Wall          |
| Wattage                             | 9.5 W                  |
| Lumen                               | 670 lm                 |
| Colour temperature                  | 3000 Kelvin            |
| Beam angle                          | 15 °                   |
| Color                               | black                  |
| CRI                                 | >80                    |



|                     |         |
|---------------------|---------|
| <b>Binning</b>      | 3       |
| <b>LXXBXX data</b>  | 70/50   |
| <b>Service life</b> | 30000 h |

**Notes**

---

---

---

---

---