

## LED EMERGENCY LIGHT XL101



### ***Technical data***

<i>Rated voltage:</i>	230V/ 50-60Hz
<i>Power:</i>	18x0.1W; 24x0.1W
<i>Colour temperature:</i>	6200K
<i>Battery:</i>	2x4V/900mAh Ni-Cd
<i>Full charging time:</i>	up to 24 hours
<i>Operating time:</i>	up to 3 hours
<i>LED source:</i>	LEDs diam. 5
<i>Body:</i>	White polyester
<i>Diffuser:</i>	Transparent thermoplastic ABS
<i>Colour rendering index:</i>	Ra>70
<i>Protection against dust and moisture:</i>	IP21


## Features

- o Clearly indicates directions to emergency exits in panic situations
- o Automatic switch-on in case of power failure
- o Low power consumption

## Area of application

- o Public buildings
- o Commercial buildings
- o Administrative buildings
- o Residential buildings
- o Banks
- o Hospitals
- o Schools

## Variants and Dimensions

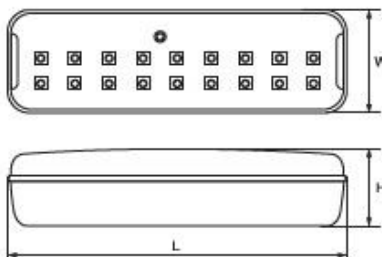


Model	LED chip lumens	Whole fixture lumens	Watt	Colour temp.	Colour body	Size (mm)			Catalogue number
	(lm)	(lm)	(W)	(K)		Length	Width	Height	
XL101BLED	6	60	18x0.1	6200-6500	white	246	76	41	9XL101BLED
XL101CLED	6	75	24x0.1	6200-6500	white	327	76	43	9XL101CLED

\*Note: with stickers



## Energy efficiency

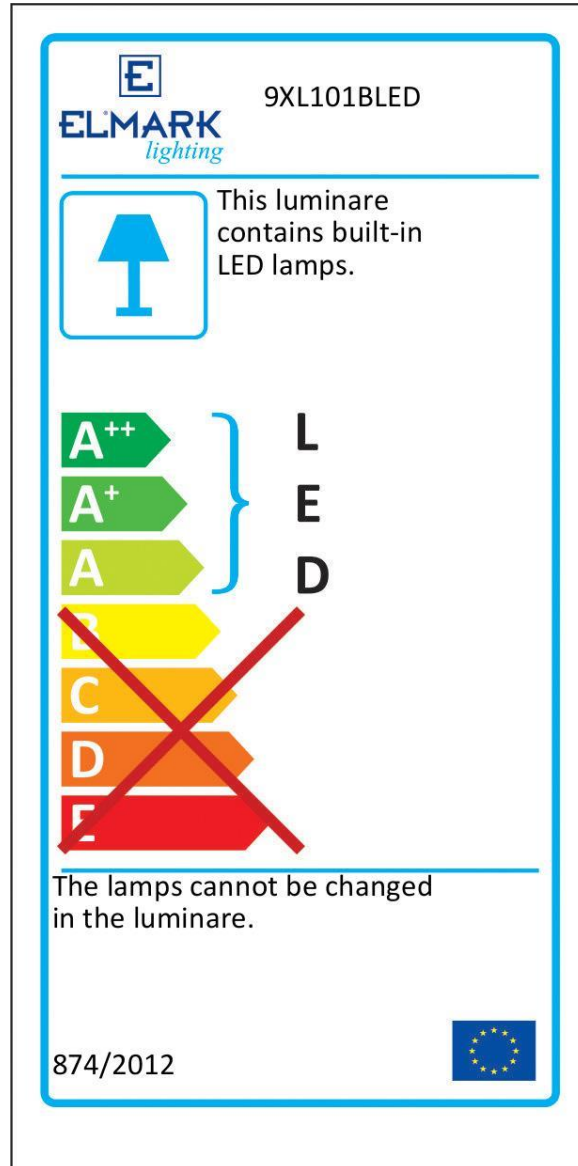

## Standards

- EN 55015 • EN 61000-3-2 • EN 61000-3-3 • EN 61547 • EN 60598-1 • EN 60598-2-4 • EN 60598-2-22 • EN 13032-4 •

