




A system of command and control wireless devices based on Zigbee technology that offers innovative solutions for the renovation of buildings, minimizing the structural interventions. Zigbee is a safe and reliable system because the data exchanged are encrypted and every node of the network always ensures reachability among all the devices (mesh network). The Zigbee devices enrich the range of home&building automation solutions by Gewiss and can be managed via App, with smartphone and tablet, through the Smart Gateway.

Category	Roller shutters actuator	Communication protocol	Zigbee (IEEE 802.15.4)
Supply voltage	230V ac - 50 Hz	Max current supplied	6A-230V ac (compl. 60669-2-1)
Output power	8 dBm	Dispersible max power (W)	2,3 W
Max power motor	500 W	Standard	2014/53/EU
IP degree	IP20	Working temperature	-5 ÷ +45 °C
Stocking temperature	-25 ÷ +70 °C	Relative humidity (non-condensative)	Max 93%
Dimensions LxHxD (mm)	42x40x20	Electrocod	051A

DIMENSIONAL

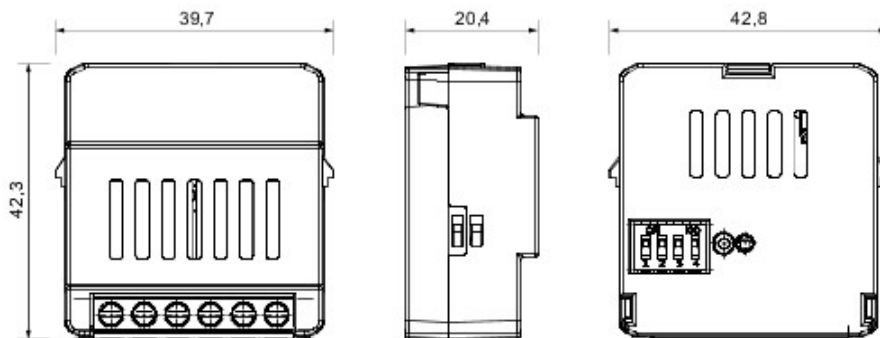

TECHNICAL SYMBOLOGY

IP

IP20

STANDARDS/APPROVALS

