

Modular push-button




BZ107430

Schrack-Info


- Modular push-button
- Lift terminals with protection against incorrect insertion

Type	BZ107410	BZ107430
Function		push-button
Function of contact	1 NO	1 NO + 1 NC
Standards	EN 60669-1	
Rated voltage	250V AC	
Rated current	16A	
Degree of protection	IP40	
Finger and hand touch safe:	in according to BGV A3, VBG4	
Climatic conditions	in according to IEC/EN 60068	
Terminals	lift-terminals	
Terminal capacity	1 - 10mm <sup>2</sup>	


BZ1074x0  
Dimensions

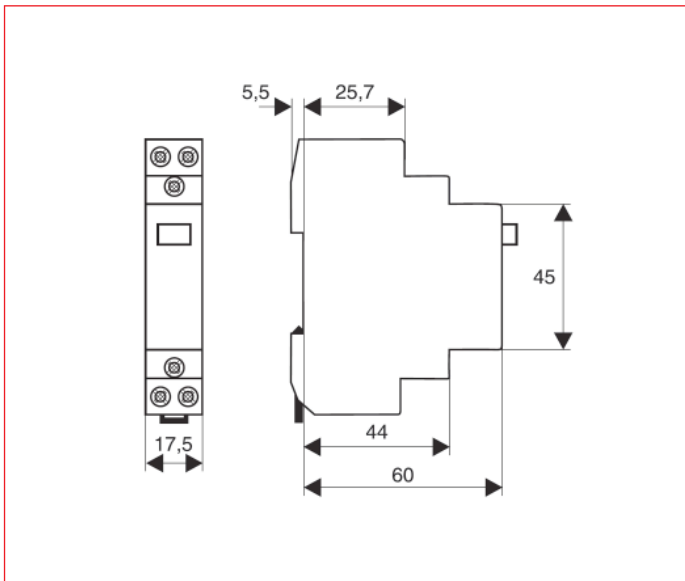

BZ107410  
Wiring diagram



BZ107430  
Wiring diagram



DESCRIPTION	AVAILABLE	ORDER NO.
16A, 1 NO		<b>BZ107410</b>
16A, 1 NO + 1 NC		<b>BZ107430</b>