

Modular switch with LED




Schrack-Info

- Latching push-button-switch with integrated LED-indicator
- Lift terminals with protection against incorrect insertion


BZ127131

Type	BZ107010	BZ107020	BZ107030	BZ107050
Function	push-button switch with LED			
Function of contact	1 NC	2 NO	1 NO + 1 NC	2 NO
Rated voltage of LED	24V-AC/DC	24V-AC/DC	230V-AC	230V-AC
Colour of LED	orange	orange	orange	orange
Standards	EN 60669-1			
Rated voltage	250V AC			
Rated frequency	50/60 Hz			
Rated current	16A			
Power loss	2W			
Degree of protection	IP40			
Finger and hand touch safe:	in according to BGV A3, VBG4			
Climatic conditions	in according to IEC/EN 60068			
Terminals	lift-terminals			
Terminal capacity	1-10mm ²			


BZ1

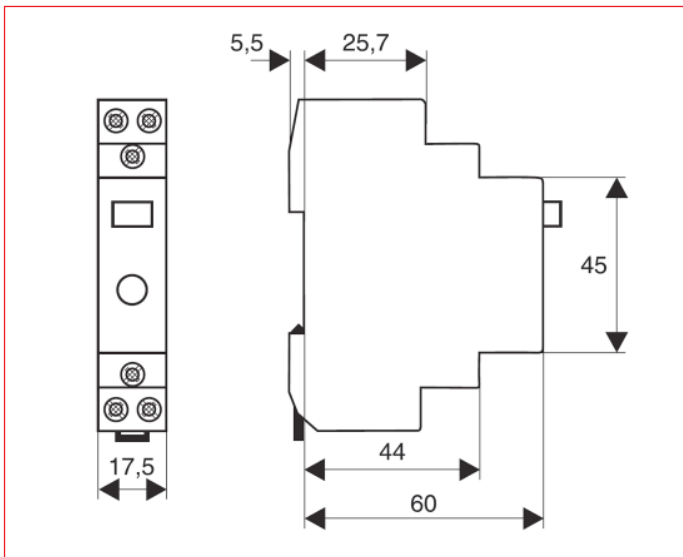

BZ1X7131



BZ1X7121



DESCRIPTION	AVAILABLE	ORDER NO.
16A, 1 NO + 1 NC, 24V-AC/DC		BZ127131
16A, 2 NO, 24V-AC/DC		BZ127121
16A, 1 NO + 1 NC, 230V-AC/DC		BZ117131
16A, 2 NO, 230V-AC/DC		BZ117121