

## Relay Sockets for RM Relays RMxx2xxx



RM78705




RM28802

### Schrack-Info

- 2/3 poles 10/16 A
- RM socket for RMxx2x types (Faston 187):  
RM332, RM632, RM732

### Dimensions (mm)

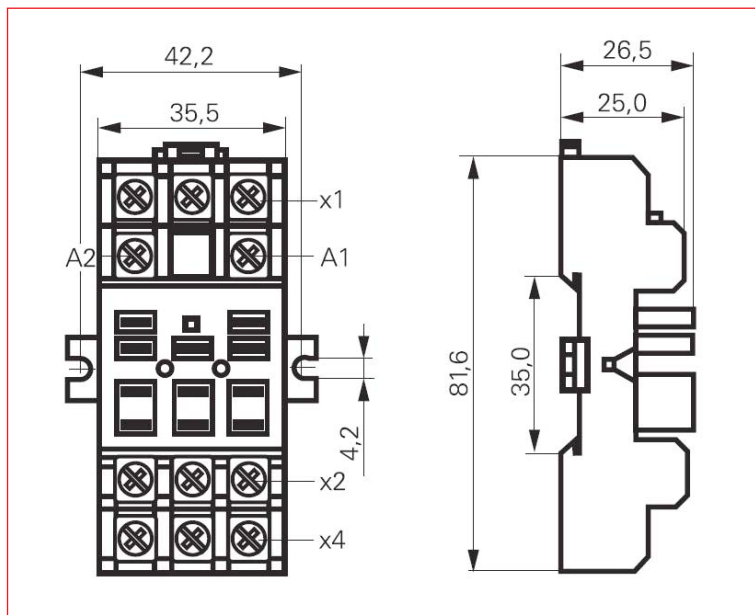

### Technical data

Rated current		16 A
Rated voltage		250 V
Dielectric strength	Coil-contact set	2500 V <sub>rms</sub>
	Open contact	1500 V <sub>rms</sub>
	Adjacent contact	2500 V <sub>rms</sub>
Clearance/ creepage coil-contact circuit		≥ 4.0 / 14.9 mm
Insulation to IEC 60664-1		
Type of insulation	Coil-contact set	Basic
	Open contact	Functional
	Adjacent contact	Basic
Rated insulation voltage		250 V
Pollution degree		2
Overvoltage category		III
Ambient temperature		-40...+40 °C
Terminals		Screw terminals
Terminal torque according to IEC 61984		0.8 Nm
	Max.	1.2 Nm
Terminal capacity	Copper wire	2 x 2.5 mm <sup>2</sup>
	Stranded wire	2 x 2.5 mm <sup>2</sup>
	With ferrule (DIN 46228/1)	2 x 1.5 mm <sup>2</sup>

DESCRIPTION	AVAILABLE	ORDER NO.
DIN rail mounted plug-in socket, 11 pole, up to 16A, for Faston 187		<b>RM78705</b>
Retaining Clip		<b>RM28802</b>

