

DATA SHEET: HOUR METER AC 230V AC, 50Hz, WITH TERMINAL COVER, IP20




SCHRACK-INFO

- Large format numerals 4.4 mm in height
- Quick-fix retaining clip
- Easy to connect – screw terminals accessible from rear
- Attachments for other cutouts
- Ring seal for IP 54 – also seals front panel cutout
- BG: quartz stabilized
- BG: large voltage ranges

TECHNICAL DATA

Supply voltages	230 V AC, 50 Hz
Voltage tolerance	±15%
Power consumption (real power)	0,15 W
Counter capacity	99,999 h.
Accuracy of reading	0.01 h.
Numeral height	4.4 mm
Numeral colour	white, decimal figure red
Operation indicator (without reset)	fast-running wheel
Permitted ambient temperature	-15°...+55°C
Enclosure	self-extinguishing thermoplastic
Switchboard flush mounting	housing to DIN EN 43700
Type of connection	Universal: Screw, soldered and 6.3 x 0.8 mm AMP plug-type connections
Type of protection (DIN EN 60529)	Front IP 20 to DIN EN 60529 (with ring seal BZ326416-A: IP 54)
Class of protection	II (when fitted in accordance with regulations)

DIMENSIONS

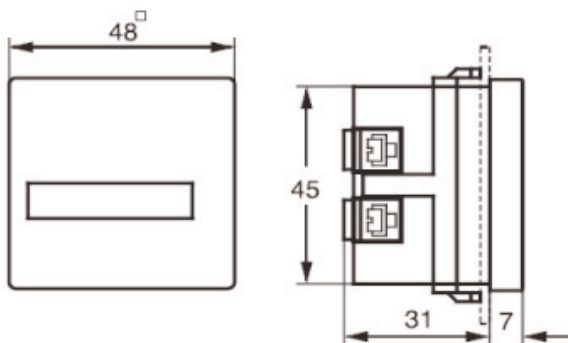

DESCRIPTION	ORDER NO.
Hour meter AC 230V AC, 50Hz, with terminal cover, IP20	BZ326413-A