

## DATA SHEET: HOUR METER AC 24V AC WITH TERMINAL COVER




### SCHRACK-INFO

- For DIN-rail mounting
- Flush mount dimensions 45 x 35 mm
- With terminal cover
- Screw terminals (pull-up type)
- Touch proof connections
- With operation indicator (flashing LED)
- One Version for 50 and 60 Hz

### TECHNICAL DATA

Supply voltages	24 V AC, 50–60 Hz
Voltage tolerance	±15%
Power consumption (real power)	0,26 W
Counter capacity	99,999 h.
Accuracy of reading	0.1 h.
Numeral height	4.4 mm
Numeral colour	white, decimal figure red
Operation indicator (without reset)	flashing LED
Permitted ambient temperature	–15°...+55°C
Enclosure	self-extinguishing thermoplastic
Type of connection	Screw terminals
Type of protection (DIN EN 60529)	IP 50 to DIN EN 60529
Class of protection	II (when fitted in accordance with regulations)

### DIMENSIONS

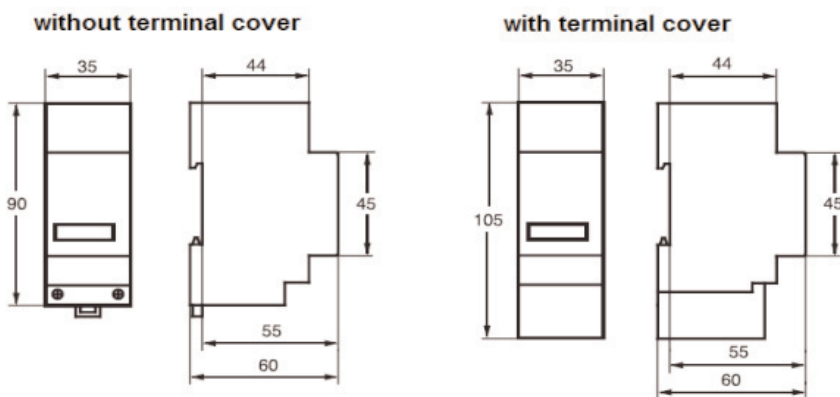

DESCRIPTION	ORDER NO.
Hour meter AC 24VAC with terminal cover	BZ326423-A