

## Modular indicator with LED



BZ127904




BZ127908

### Schrack-Info


- LED technology
- Low power loss
- Lift terminals with protection against incorrect insertion

Type	BZ127904	BZ117904	BZ127908	BZ117908
Function	LED-Indicator			
Rated voltage of LED	12-24V-AC/DC	110-240V-AC/DC	12-24V-AC/DC	110-240V-AC/DC
Colour of LED	red/green		2 x red/green	
Standards	EN 60669-1			
Rated frequency	50/60 Hz			
Power loss	2W			
Degree of protection	IP40			
Finger and hand touch safe:	in according to BGV A3, VBG4			
Climatic conditions	in according to IEC/EN 60068			
Terminals	lift-terminals			
Terminal capacity	1-10mm <sup>2</sup>			


### BZ1x790x Dimensions

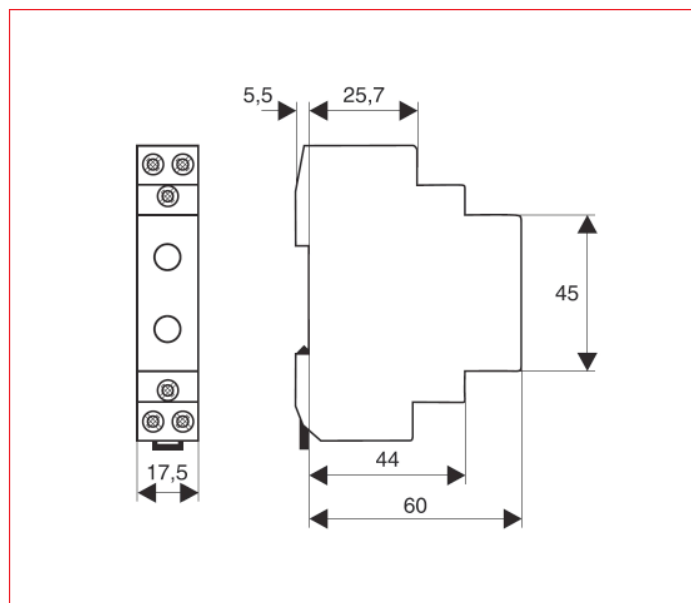

### BZ1X7908 Wiring diagram



### BZ1X7904 Wiring diagram

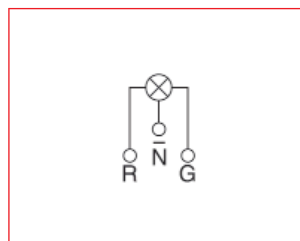

DESCRIPTION	AVAILABLE	ORDER NO.
Single-LED, 12-24V AC/DC		<b>BZ127904</b>
Single Light 110-240V-AC/DC, red/green		<b>BZ117904</b>
Double-LED 12-24V AC/DC		<b>BZ127908</b>
Double Light 110-240V-AC/DC, red/green		<b>BZ117908</b>