## Relay Sockets and Sets SNR




ST3FLC4

## Schrack-Info

- Relay package consisting of a relay and a DIN rail socket
- 1 CO 6 A rated current
- Safe disconnection compliant with VDE0160 in combination with socket YRT78626
- Module width only 6.2 mm
- Narrow component width allows high component density and tight-packed functionality on the DIN
- Complies with the 2002/95/EC RoHS Directive
- Protection diode

## Dimensions (mm)

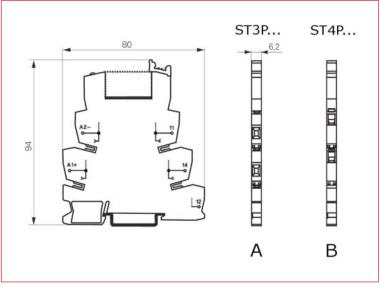

## Dimensioned drawing

Α	Screw terminals	
В	Spring clamp terminals	

DESCRIPTION	AVAILABLE	ORDER NO.
12V-DC, 1 CO, 6A with socket	000	ST3P3LB2
24V-DC, 1 CO, 6A with socket	955 0-0	ST3P3LC4
24V-DC, 1 CO, 6A with socket	355 0-0	ST3P2LC4
230V-AC/DC, 1 CO, 6A with socket	000 0=0	ST3P3TP0
24V-DC, 1 CO, 6A with socket	000	ST4P3LC4
24V-DC, 1 CO, 6A with socket, htv		ST4P2LC4
230V-AC/DC, 1 CO, 6A with socket		ST4P3TP0
DIN rail mounted plug-in socket for SNR relays, 24V-DC, 6A, incl. protection diode, with screw terminals	000 0-0	ST3FLC4
SNR jumper bar, red, 500mm	000	ST37001
SNR jumper bar, blue, 500mm	000	ST37002
SNR jumper bar, grey, 500mm	000	ST37003
Marking plate, 1 plate= 100pcs.	000 0-0	ST37040
Separator plate		ST36040
DIN rail mounted plug-in sockets for SNR relays, 24V-DC, 6A, incl. protection diode, with spring clamp terminals	000 0-0	YSN78024
Connection bridge 20 pole for YSN90020	000 0-0	YSN90020



