

SHUNTS



MG900118


SCHRACK-INFO

- Ambient temperatures -25 °C to + 60 °C
- Relative humidity \leq 95%
- Overload capability
 - 1.2x I_n continuous
 - 10x I_n 5 s up to 250 A
 - 5x I_n 5 s from 251 to 1000 A
- Accuracy: Class 0.5
- Measuring voltage: at I_n ...60 mV

TIPS & TRICKS

- For direct current instruments A/60 mV can be used
- Complies with the DIN standard
- Available up to 25 A on insulated carrier part

DIMENSIONS

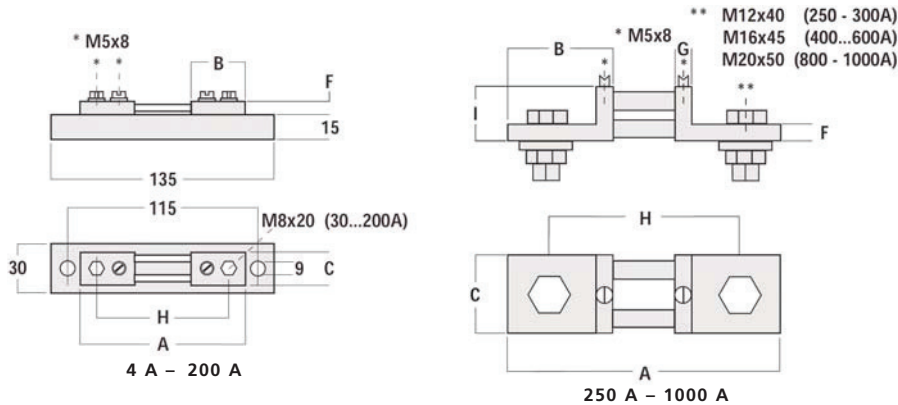

Amperage	A	B	C	F	G	H	I
4 A	90	28	20	8		78	
6 A	90	28	20	8		78	
10 A	90	28	20	8		78	
15 A	90	28	20	8		78	
20 A	90	28	20	8		78	
25 A	90	28	20	8		78	
40 A	100	30	20	8		80	
60 A	100	30	20	8		80	
100 A	100	30	20	8		80	
150 A	100	30	20	8		80	
200 A	100	33	20	8		80	
250 A	145	55	30	10	10	105	30
300 A	145	55	30	10	10	105	30
400 A	145	55	40	10	10	105	30
500 A	145	55	40	10	10	105	30
600 A	145	55	40	10	10	105	30
800 A	165	65	60	10	10	115	30
1000 A	165	65	60	10	10	115	30

NOMINAL CURRENT	DIM. (WxHxD) mm	PU	EAN CODE	AVAILABLE	ORDER NO.
15 A	135x30x23	1	9004840058529		MG900105
20 A	135x30x23	1	9004840058536		MG900106
25 A	135x30x23	1	9004840058543		MG900107
40 A	135x30x23	1	9004840058567		MG900109
60 A	135x30x23	1	9004840058581		MG900111
100 A	135x30x23	1	9004840058598		MG900112
150 A	135x30x23	1	9004840058604		MG900113
200 A	135x30x23	1	9004840058611		MG900114
250 A	145x30x30	1	9004840058628		MG900115
300 A	145x30x30	1	9004840058635		MG900116
400 A	145x30x30	1	9004840058642		MG900117
500 A	145x30x30	1	9004840058659		MG900118
600 A	145x30x30	1	9004840058666		MG900119
800 A	165x60x30	1	9004840058673		MG900120
1000 A	165x60x30	1	9004840058680		MG900121



Order no. blue: on stock, usually ready for delivery on the day of order!