


■ DATASHEET: IG700904 BASE WITHOUT EMBOSSING FLANGES TYPE D




- **SCHRACK INFO**
Including: Flanged - Base with screws for mounting plate / DIN - rail, cover with PUR gasket and polyamide cover screws.

■ TECHNICAL DATA

Material:	ABS
Cover screws material:	Polyamide
Sealing:	Polyurethane
Protection:	IP 66/67
Impact resistance:	IK 08
Electrical insulation:	Totally insulated
Halogen free	Yes
UV resistance:	by UL 508
Temperature range:	-40°C...120°C (short-term) -40°C...60°C (continuous)
Colour:	RAL 7035

■ DIMENSIONS

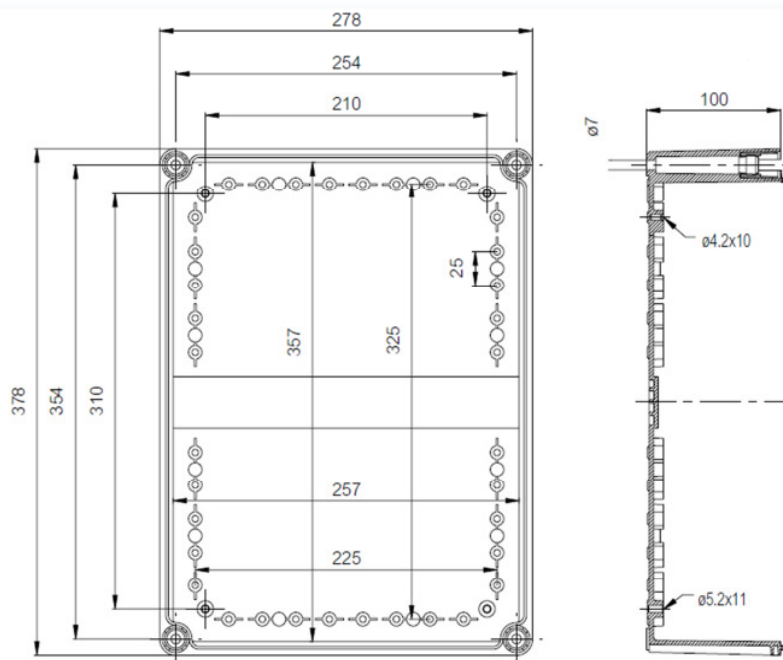

■ LOW COVER 30mm

TYP	B x H x D (mm)	ORDER NUMBER
D – transparent	380x280x30	IG700311
D – grey	380x280x30	IG700301

■ HIGH COVER 80mm

TYP	B x H x D (mm)	ORDER NUMBER
D – transparent	380x280x80	IG700321
D – grey	380x280x80	IG700331

■ EXTENSION

TYP	B x H x D (mm)	ORDER NUMBER
D	380x280x50	IG710301

■ MOUNTING PLATE (galvanized steel plate 1.5 mm)

TYP	B x H (mm)	ORDER NUMBER
D	338x248	IG710302

■ ACCESSORIES

DESCRIPTION	ORDERNUMBER
Quick locking screw set	IG713000
Pin hinges	IG713001
Connection flange sealent, size 2	IG713003
Special hinges	IG713018
Winged head screw 30mm	IG713025
Winged head screw 80mm	IG713026
Screw for Mounting Kit	IG713027
Slot bolt 30mm	IG713028
Slot bolt 80 mm	IG713029