


## ■ DATASHEET: IG700903 BASE WITHOUT EMBOSSING FLANGES TYPE C




- **SCHRACK INFO**  
Including: Flanged - Base with screws for mounting plate / DIN - rail, cover with PUR gasket and polyamide cover screws.

### ■ TECHNICAL DATA

Material:	ABS
Cover screws material:	Polyamide
Sealing:	Polyurethane
Protection:	IP 66/67
Impact resistance:	IK 08
Electrical insulation:	Totally insulated
Halogen free	Yes
UV resistance:	by UL 508
Temperature range:	-40°C...120°C (short-term) -40°C...60°C (continuous)
Colour:	RAL 7035

### ■ DIMENSIONS

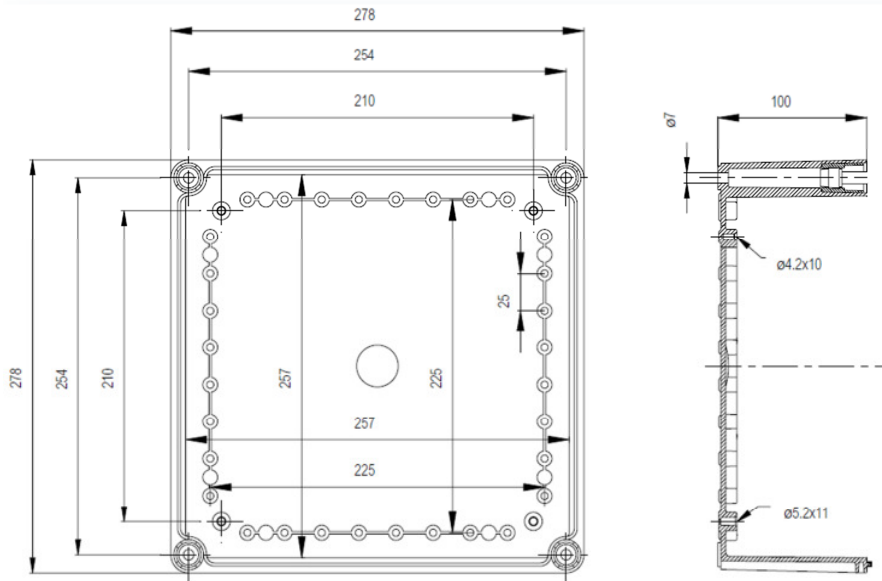

**LOW COVER 30mm**

TYPE	B x H x D (mm)	ORDER NUMBER
C – transparent	280x280x30	IG700211
C – grey	280x280x30	IG700201

**HIGH COVER 80mm**

TYPE	B x H x D (mm)	ORDER NUMBER
C – transparent	280x280x80	IG700231
C – grey	280x280x80	IG700221

**EXTENSION**

TYPE	B x H x D (mm)	ORDER NUMBER
C	280x280x50	IG710201

**MOUNTING PLATE (galvanized steel plate 1.5 mm)**

TYPE	B x H (mm)	ORDER NUMBER
C	238x238	IG710202

**ACCESSORIES**

DESCRIPTION	ORDERNUMBER
Quick locking screw set	IG713000
Pin hinges	IG713001
Connection flange sealent, size 2	IG713003
Special hinges	IG713018
Winged head screw 30mm	IG713025
Winged head screw 80mm	IG713026
Screw for Mounting Kit	IG713027
Slot bolt 30mm	IG713028
Slot bolt 80 mm	IG713029