

THERMOSTATS AND HUMIDISTATS



IUK08561



IUK08562



IUK08564

DESCRIPTION	EAN CODE	AVAILABLE	ORDER NO.
Thermostat 10 - 60° C, th. comp. 0.5K, 1 CO	9004840461626		IUK08561
Heating thermostat N/C switch, red	9004840461602		IUK08565
Twin Thermostat	9004840543469		IUK08563
Ventilation thermostat N/O switch, blue (UL)	9004840461619		IUK08566
Humidistat 50 - 100% rF, 1 CO	9004840461633		IUK08562
Hygrostat - Thermostat 0 - 60° C, 40-90% rF, 1 CO - 8 A (AC240)	9004840543452		IUK08564
Electrical moisture and temperature control 0 - 60° C, 40-90% rF, 1 CO - 8A (AC240)	9004840464313		IU008560-A

FAN WITH FILTER, QUICK-FASTENING



SCHRACK-INFO

- Easy, screw-free mounting
- Quick-fastening, click in
- Voltage 230V, 50-60Hz
- Plastic heat resistance (-15° C bis +55° C), self-extinguishing according to UL 94 V0
- Flat design: Dimensions of cover grille max. 6,5 mm
- Certifications: UL, CSA
- Degree of protection IP 54 (EN 60529)
- Toolless fixing
- RAL 7035

DESCRIPTION	DIM. (WxHxD) mm	EAN CODE	AVAILABLE	ORDER NO.
Filter fan	105x105x52	9004840539356		IUKNF1523A
Filter fan	150x150x72	9004840539349		IUKNF2523A
Filter fan	202x202x72	9004840539295		IUKNF3523A
Filter fan	250x250x111	9004840539288		IUKNF4523A
Filter fan	250x250x121	9004840539332		IUKNF5523A
Filter fan	320x320x150	9004840539325		IUKNF6523A
Filter fan	320x320x150	9004840539271		IUKNF7523A
Filter fan	320x320x150	9004840539318		IUKNF8523A
Exhaust filter	105x105x14	9004840543216		IUKNE150
Exhaust filter	150x150x31	9004840545838		IUKNE250
Exhaust filter	202x202x34	9004840543209		IUKNE350
Exhaust filter	250x250x36	9004840543193		IUKNE450
Exhaust filter	320x320x39	9004840543186		IUKNE550
Pressure compensating plug IP55	∅ 66	9004840054125		IU008563
Spare filter for filter fan IP54	109x109	9004840587708		IUKM4510
Spare filter for filter fan IP54	145x145	9004840587715		IUKM4610
Spare filter for filter fan IP54	202x202	9004840587074		IUKM4710
Spare filter for filter fan IP54	252x252	9004840587722		IUKM4810
Spare filter for filter fan IP54	320x320	9004840587739		IUKM4910
Spare filter for filter fan IP55	145x145	9004840587746		IUKM4620
Spare filter for filter fan IP55	202x202	9004840587753		IUKM4720
Spare filter for filter fan IP55	252x252	9004840587760		IUKM4820
Spare filter for filter fan IP55	320x320	9004840587777		IUKM4920



Order no. blue: on stock, usually ready for delivery on the day of order!

EQUIPMENT CABINET HEATING SYSTEMS



HEATING SYSTEMS

SCHRACK-INFO

- Voltage range AC/DC 110 V - 250 V
- Self-regulating, PTC
- Self-limiting surface temperature
- Reduced energy consumption through power readjustment in accordance with dissipated heat
- No noise suppression required
- Dynamic heating behaviour
- Tropic-proof
- IP20
- Anodized surface, large effective heating surface, natural convection
- Can be mounted at different heights according to needs
- Fastening clips can be rotated 90° for top-hat mounting
- VDE, SEV, UL approved
- Protection class I
- 3 connector model
- Terminal connection

DESCRIPTION	EAN CODE	AVAILABLE	ORDER NO.
10 W/80 °C Terminal connection	9004840461510		IUK08364-A
15 W/80 °C Terminal connection	9004840461527		IUK08346
30 W/100 °C Terminal connection	9004840461534		IUK08341
45 W/120 °C Terminal connection	9004840461541		IUK08342
60 W/160°C Terminal connection	9004840461558		IUK08343
100 W/160 °C Terminal connection	9004840461565		IUK08344
150 W/160 °C Terminal connection	9004840461572		IUK08345
250 W/75 °C Terminal connection	9004840461589		IUK08250
400 W/85 °C Terminal connection	9004840461596		IUK08400

SMALL HEATERS



SCHRACK-INFO

- Voltage range AC/DC 110 - 250 V, max. 265 V
- Heating element: (PTC) thermistor, self-regulating
- Heating unit: Anodized aluminium profile
- Protection class II, IP54
- Connecting lead: Silicon cable 0,3 m long 2 x 0,75 mm²
- Fastenings: Clip for 35 mm DIN rail EN 60715

DESCRIPTION	EAN CODE	AVAILABLE	ORDER NO.
15 W 9-36V AC/DC	9004840091823		IU008346-A
30 W 9-36V AC/DC	9004840091830		IU008347-A
60 W 9-36V AC/DC	9004840091854		IU008349-A
110-250V, 10 W + cable 1 m	9004840543421		IUK08351
110-250V, 20 W + cable 1 m	9004840543445		IUK08352
110-250V, 30 W + cable 1 m	9004840543438		IUK08353

LIGHTS FOR EQUIPMENT CABINETS



IU008508



IU008517

SCHRACK-INFO IU008508, IU008513, IU008509

- Operating voltage: 230V, 50-60Hz with on/offswitch for lamp
- Output: 11 W (~ 75 W bulb)
- Light intensity: 900 lm
- Service life: 5000 h
- RI suppression: meets VDE 0712 IEC 82
- Degree of protection: IP 20
- Plug connection: 230 V AC, 16 A earthed
- Connection: Terminal 3 x 2,5 mm² with cable relief
- Magnetic fastener: approx. 20 kg for 2 mm steel plates
- Housing: Plastic, shock-resistant, UL 94 V0

SCHRACK-INFO IU008515 - IU008517

- Operating voltage: 220 - 240V/ 50-60Hz
- Lamp: Energy-saving lamp, base E27
- Power consumption: 20 W (~ 100 W bulb)
- Light intensity: 1000 lm
- Light colour: Daylight, white
- Service life: 10.000 hours
- Housing: Plastic, shock-proof
- Degree of protection: IP 20
- Protection class: II

SCHRACK-INFO IU008523 - IU008525

- Wide voltage range
- Integrated power unit
- Daisy chain
- Long-lived and maintenance-free by LED technology
- Magnet fixing
- On/off switch

DESCRIPTION	DIM. (WxHxD) mm	EAN CODE	AVAILABLE	ORDER NO.
Dual light with one-off press switch/6-pole screw terminal 2,5 mm ² f. mains connection, 2 lamps in parallel output and external door contact switches	396x100x67	9004840128352		IU008515
Hand lamp with light holder, hook/mains lead a. plug	337x84x68	9004840128406		IU008517
Compact light with magnetic fastening/with earthed plug	65x351x62	9004840053968		IU008508
Compact light with pin-earth/CH	65x351x62	9004840054026		IU008513
Compact light without magnetic fastening/with earthed plug	65x351x62	9004840053975		IU008509
LED enclosure lamp	351x39x34	9004840675993		IU008523
Connection cable (2,0m)		9004840676006		IU008524
Extension cable (1,0m)		9004840676013		IU008525

POCKET FOR A4 CIRCUIT DIAGRAMS



ASDRA400

- ### SCHRACK-INFO
- Self-adhesive pocket for circuit diagrams in DIN A4 format
 - Up to depth: 30 mm
 - Colour grey
 - Material: Thermoplastic
 - Each package contains 1x incl. fixing material

DESCRIPTION	EAN CODE	AVAILABLE	ORDER NO.
Pocket for A4 circuit diagram, grey	9004840248418		ASDRA400
Pocket for A4 circuit diagramm, PVC, magnetic	9004840038743		IL900373
Pocket for A5 circuit diagramm, grey	9004840554892		ASDRA500




Order no. blue: on stock, usually ready for delivery on the day of order!

TERMINAL BOXES



IG311511

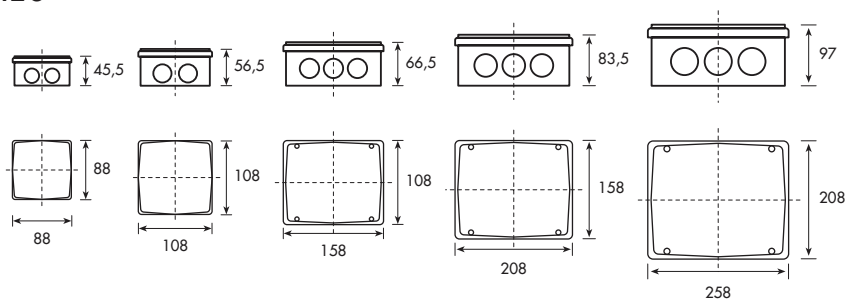

SCHRACK-INFO

- Material: Polycarbonate, self-extinguishing
- Embossed openings on all sides
- Colour: RAL 7035
- Degree of protection: IP 55 (IEC-529)
- Diagonal fins allows for a variety of devices with tapping screws

DESCRIPTION	DIM. (WxHxD) mm	EAN CODE	AVAILABLE	ORDER NO.
Branch socket, IP44	80x80x40	9004840248517		IG310808
Branch socket	100x100x50	9004840248524		IG311010
Branch socket	150x110x70	9004840248531		IG311511
Branch socket	150x 75x50	9004840248548		IG311275
Branch socket	190x145x70	9004840248555		IG311914
Branch socket	240x190x110	9004840248562		IG312419
Branch socket	300x220x120	9004840248579		IG313022
Terminal box	120x122x65	9004840019698		IG704008
Terminal box	90x160x120	9004840019711		IG704010
Terminal box	120x200x75	9004840019674		IG704011
Terminal box	80x160x65	9004840019834		IG704036
Terminal box	95x122x120	9004840019858		IG704039
Terminal box	160x240x90	9004840019865		IG704045

CABLE ENTRIES FOR TERMINAL BOXES

DESCRIPTION	DIM. (WxHxD) mm	EAN CODE	AVAILABLE	ORDER NO.
PG 9-PG 11	∅ 25x13	9004840073874		IG390001
PG 9-PG 16	∅ 33x20	9004840073881		IG390002
PG 9-PG 21	∅ 43x22	9004840073898		IG390003
PG 21-PG 48	∅ 70x20	9004840073904		IG390004
PG 21-PG 48	∅ 98x23	9004840073911		IG390005