

DATASHEET: BK0800 TOPO SERIES
FLUSH MOUNTED – DISTRIBUTION BOARD IP 40




SCHRACK INFO


Flush mounted distribution board according to ÖVE/ÖNORM EN 60670-1:2005-12-01, IEC 60670-24, incl. PE- and N-terminals, with transparent or fully plastic door.

TECHNICAL DATA

MATERIAL:	ABS
PROTECTION:	IP 40
PROTECTION CLASS:	II
RATED VOLTAGE:	400 VAC
ENVIRONMENTAL TEMPERATURE:	-20°C TO +70°C
PENETRATION INTO WALL:	68 - 70 MM
COLOUR:	RAL 9010

DIMENSIONS

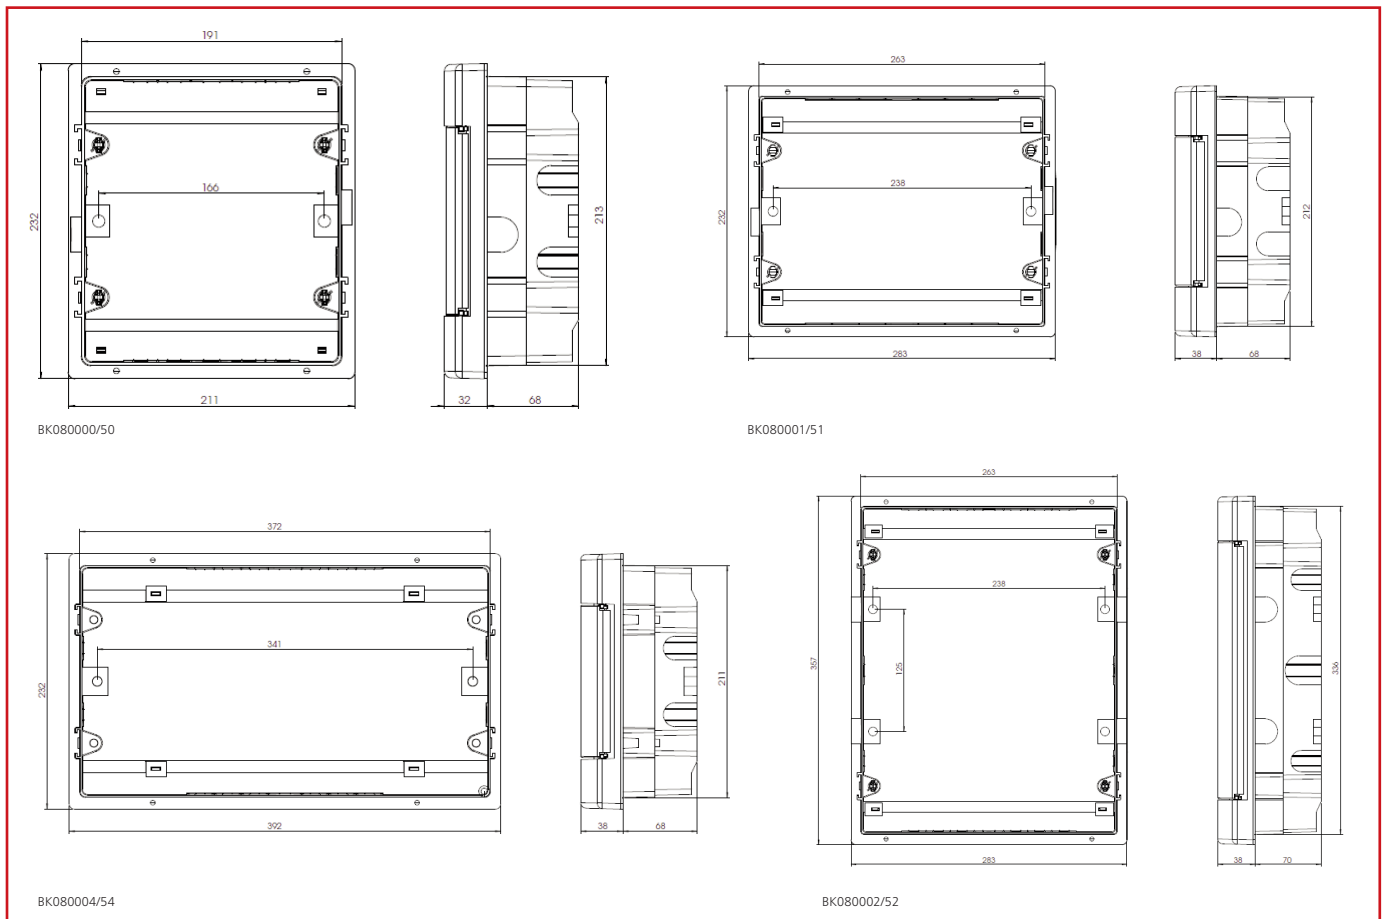

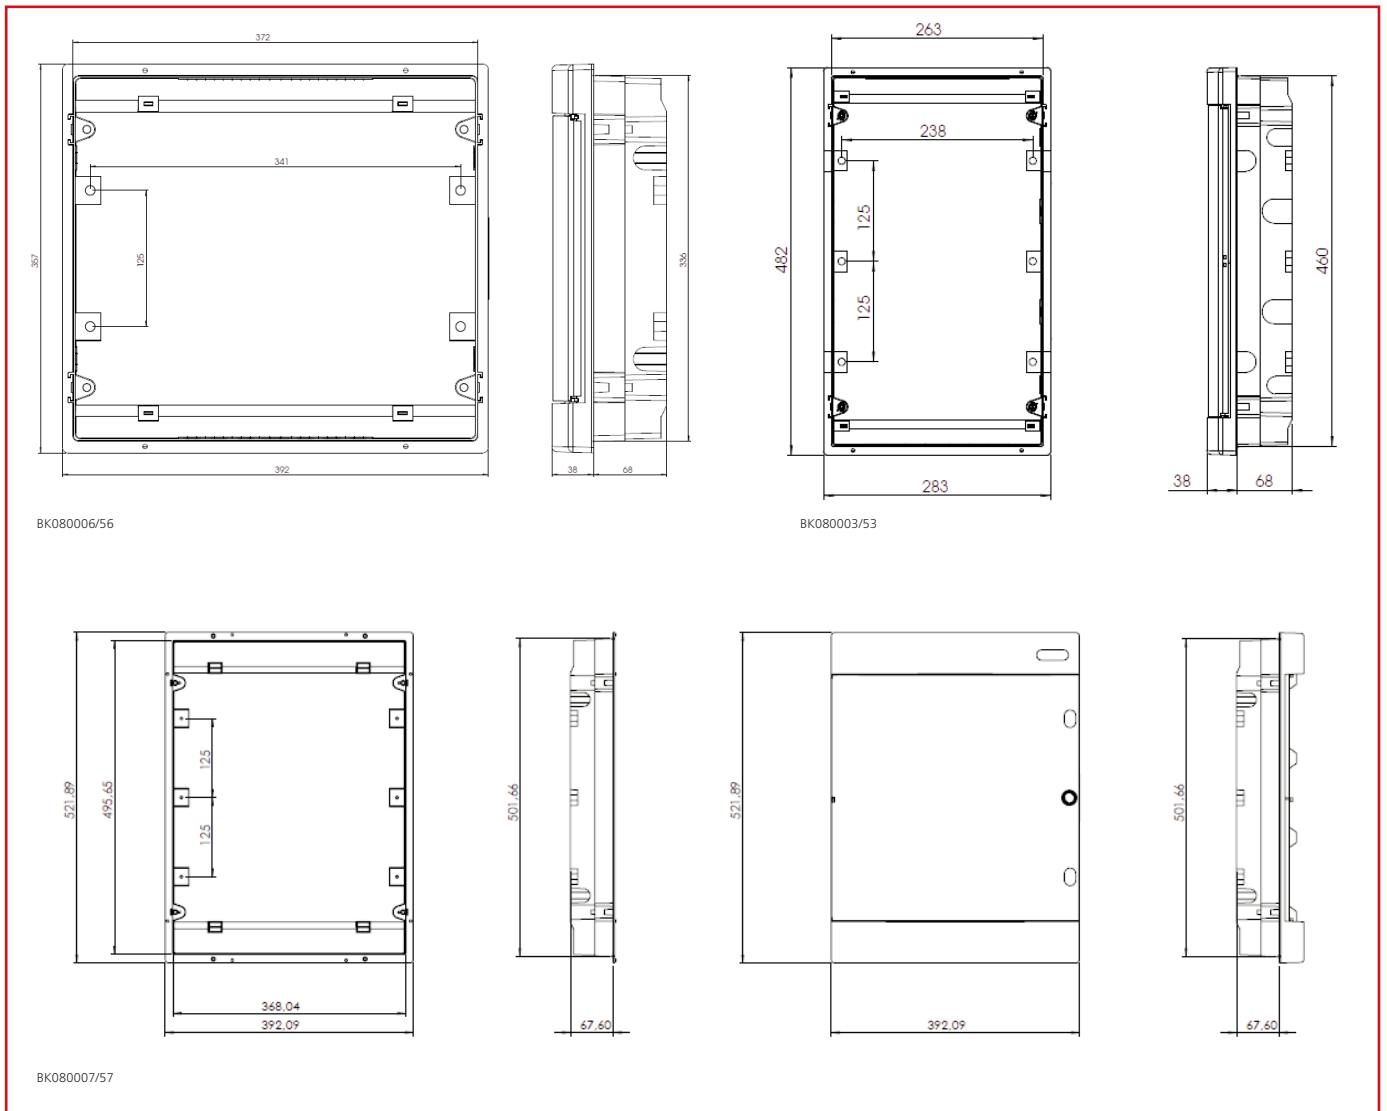

DESCRIPTION	WxHxD (mm)	ORDER NO.
FLUSH MOUNTED WITH TRANSPARENT PLASTIC DOOR		
4TE - 1-row	211x232x110	BK080000
12TE - 1-row	283x232x110	BK080001
18TE - 1-row	392x232x110	BK080004
24TE - 2-rows	283x357x110	BK080002
36TE - 2-rows	396x357x110	BK080006
36TE - 3-rows	283x482x110	BK080003
54TE - 3-rows	392x522x106	BK080007

FLUSH MOUNTED WITH FULL PLASTIC DOOR		
4TE - 1-row	211x232x110	BK080050
12TE - 1-row	283x232x110	BK080051
18TE - 1-row	392x232x110	BK080054
24TE - 2-rows	283x357x110	BK080052
36TE - 2-rows	396x357x110	BK080056
36TE - 3-rows	283x482x110	BK080053
54TE - 3-rows	392x522x106	BK080057

ACCESSORIES

Half-cylinder lock		BK080099
Half-cylinder lock, Metall		BK080096
Terminal support 2x8		BK080097
Terminal support 2x15		BK080098