

■ Datasheet: Brass cable gland with sealing ring




M272811 and M273121

■ SCHRACK-INFO

Cable gland, sealing ring of natural rubber 55 Sh,
pressure ring of galvanized steel
Temperature range: -40 to +60°C DIN 46320
Material: nickel-plated brass
Protection class: IP65 without flange

■ Dimensions

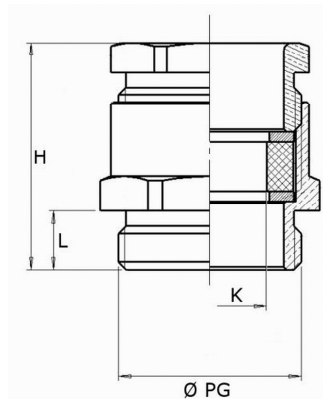

Article number	Description	Clamping range	Lenght connecting thread	total height	wrench size
		K	L	H	SW
M272811--A	PG 13,5	5,0-12,0 mm	6,5mm	26mm	SW 22
M272812--A	PG 16	7,0-14,0 mm	6,5mm	27mm	SW 24
M272813--A	PG 21	9,0-17,0 mm	7mm	30mm	SW 30
M272814--A	PG 29	14,0 - 26,0 mm	8mm	33mm	SW 40
M272815--A	PG 36	18,0 - 33,0 mm	9mm	40mm	SW 50

Description	ORDER No.
Screw connection PG brass	
PG 13,5	M272811
PG 16	M272812
PG 21	M272813
PG 29	M272814
PG 36	M272815
Locknut for screw connection PG Messing	
PG 13,5	M273121
PG 16	M273122
PG 21	M273123
PG 29	M273124
PG 36	M273125