


DATA SHEET:  
MODUL 2000 - WALL-MOUNTED FRAME WITH DOOR IP20C



SCHRACK-INFO

- Modular wall-mounted sheet steel frame with door
- Available in sizes from 2A-42 to 5A-42 Modul-high enclosures
- Standard depth 400mm
- Designed with riveted steel sheet back panel and 3-point rod lock with swing handle prepared for installation of various half cylinder locks. e.g. 61005 (IU001916--), double-bit 5mm (IU001906--) or industrial lock 333 (DV900333--). Other half cylinder locks only DIN and with adjustable locking cam
- Cable entry slit with sponge rubber gland plate (on the top and bottom)
- Degree of protection IP20C
- RAL 7035 light grey

IL009342-F

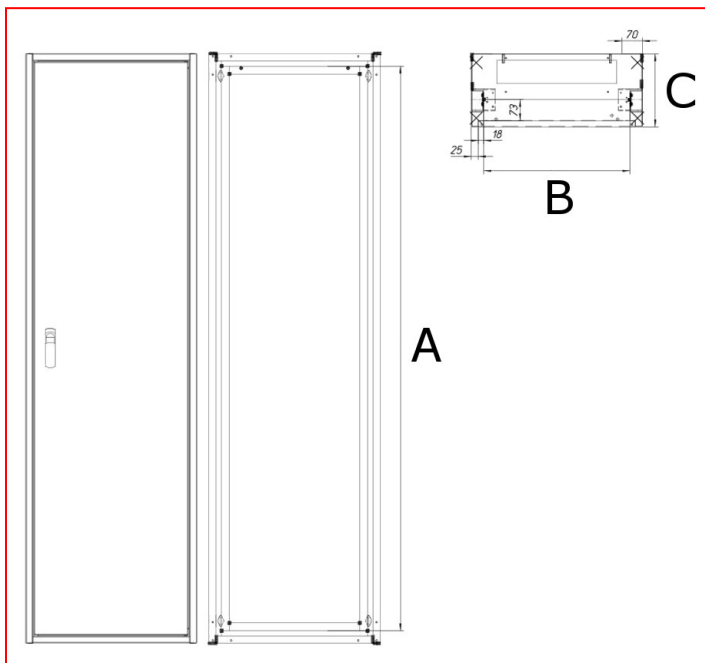

Article number	Meter spaces	Modul heights	A [mm]	B [mm]	C [mm]	Radiant power loss [W]*
IL009242-F	2	42	1935	500	400	-666
IL009342-F	3			720		-810
IL009442-F	4			940		-954
IL009542-F	5			1140		-1085

\*Max. radiated power of housing calculated as a wall-mounted single fixed with  $\Delta T = 35$  K.

DESCRIPTION	WxHxD mm	ORDER NO.
Wall-mounted frame with door 2A-42	590x2025x400	IL009242-F
Wall-mounted frame with door 3A-42	810x2025x400	IL009342-F
Wall-mounted frame with door 4A-42	1030x2025x400	IL009442-F
Wall-mounted frame with door 5A-42	1230x2025x400	IL009542-F