

■ DATASHEET: POLYCARBONAT INSTALLATION ENCLOSURE




■ SCHRACK-INFO

Special developed Polyester enclosure with plan sides. Many mounting possibilities for Accessories (DIN-Rails or Mounting plate) on the Base available.


■ TECHNICAL DATA

PROPERTY	DATA
Ingress Protection	IP 65 (EN 60529)
Electrical Insulation	Totally Insulated <input type="checkbox"/>
Color	grey RAL 7035
Material:	
base	reinforced polyester
cover	polycarbonate
screws	Polyamid
gasket	PUR
Impact resistance	IK08 (EN62262)
Temperaturbereich:	
Material	-40°C ... 120°C
Operation	max. 80°C
glow wire test:	
base	UL 94-V2
cover	UL 94-V1
halogen free	
chemical resistance	good


■ DIMENSIONS

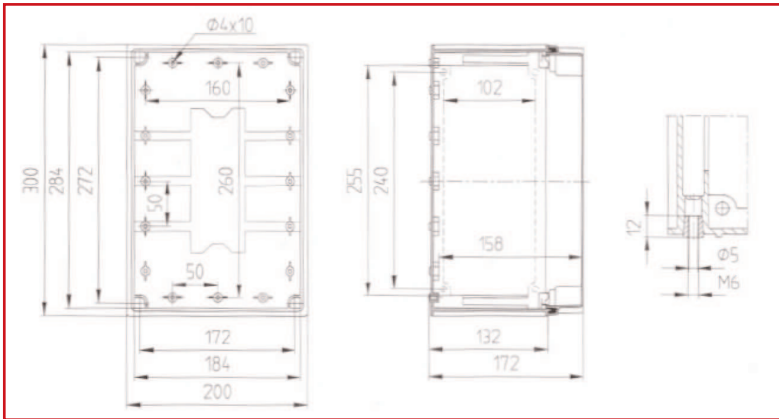


Base: IG706111
Cover 40mm grey: IG706116

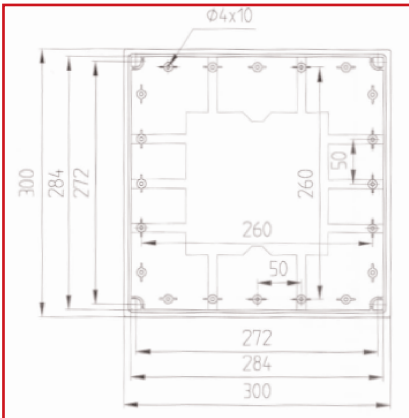

Base: IG706112
Cover 40mm grey: IG706117

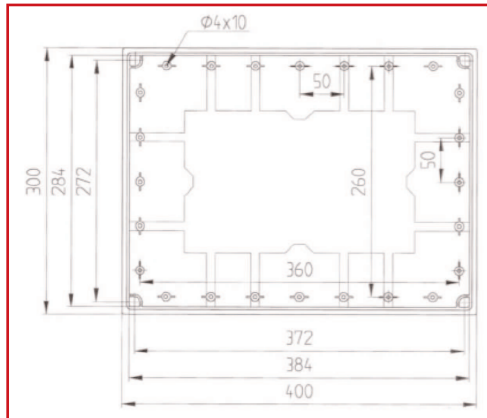

Base: IG706113
Cover 40mm grey: IG706118

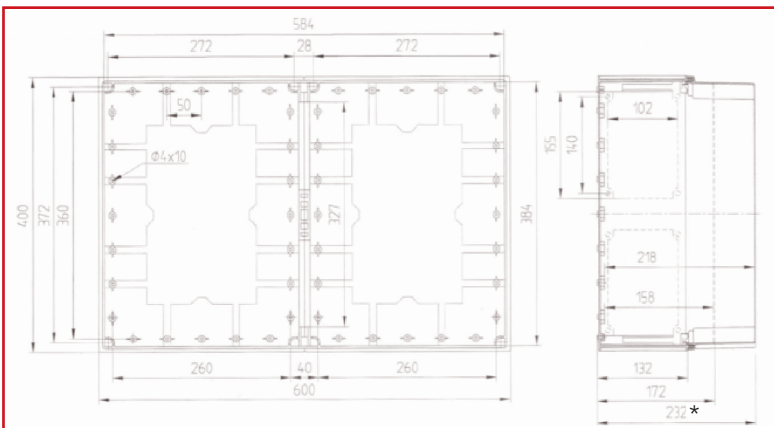

Base: IG706114
Cover 40mm grey: IG706119
*height 100mm not available


■ ACCESSORIES

Montingplates: galvanized steel, sheet thickness 1,5mm




IG706121	170 x 270mm
IG706122	270 x 270mm
IG706123	370 x 270mm
IG706124	570 x 370mm

Hinges: IG706125

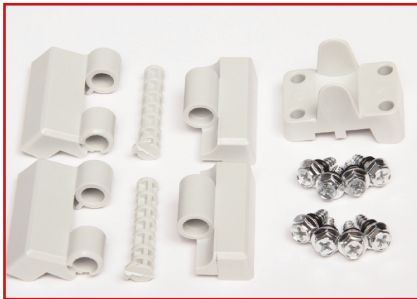

Wall mounting: IG706126

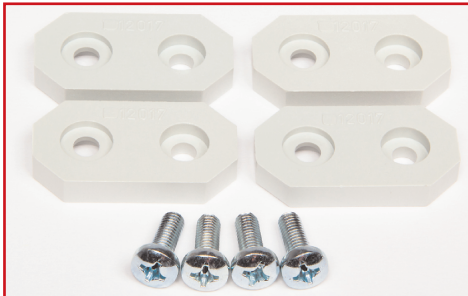

Cover Screws: slotted head: IG706127

