


■ DATASHEET: IG702030 – 35
WALL MOUNTED DISTRIBUTOR IP 65




■ SCHRACK INFO

- Material: Polycarbonate
- Cover screws material: Polyamide
- Protection: IP 65
- Dielectric strength: IK 08
- Temperature resistance: -40°C to / bis 120°C
- Fully insulated
- Colour: RAL 7035
- Seal: TPE
- Fire classification: UL 94-5V
- Halogen – free
- UV resistance: UL 508

■ DIMENSIONS

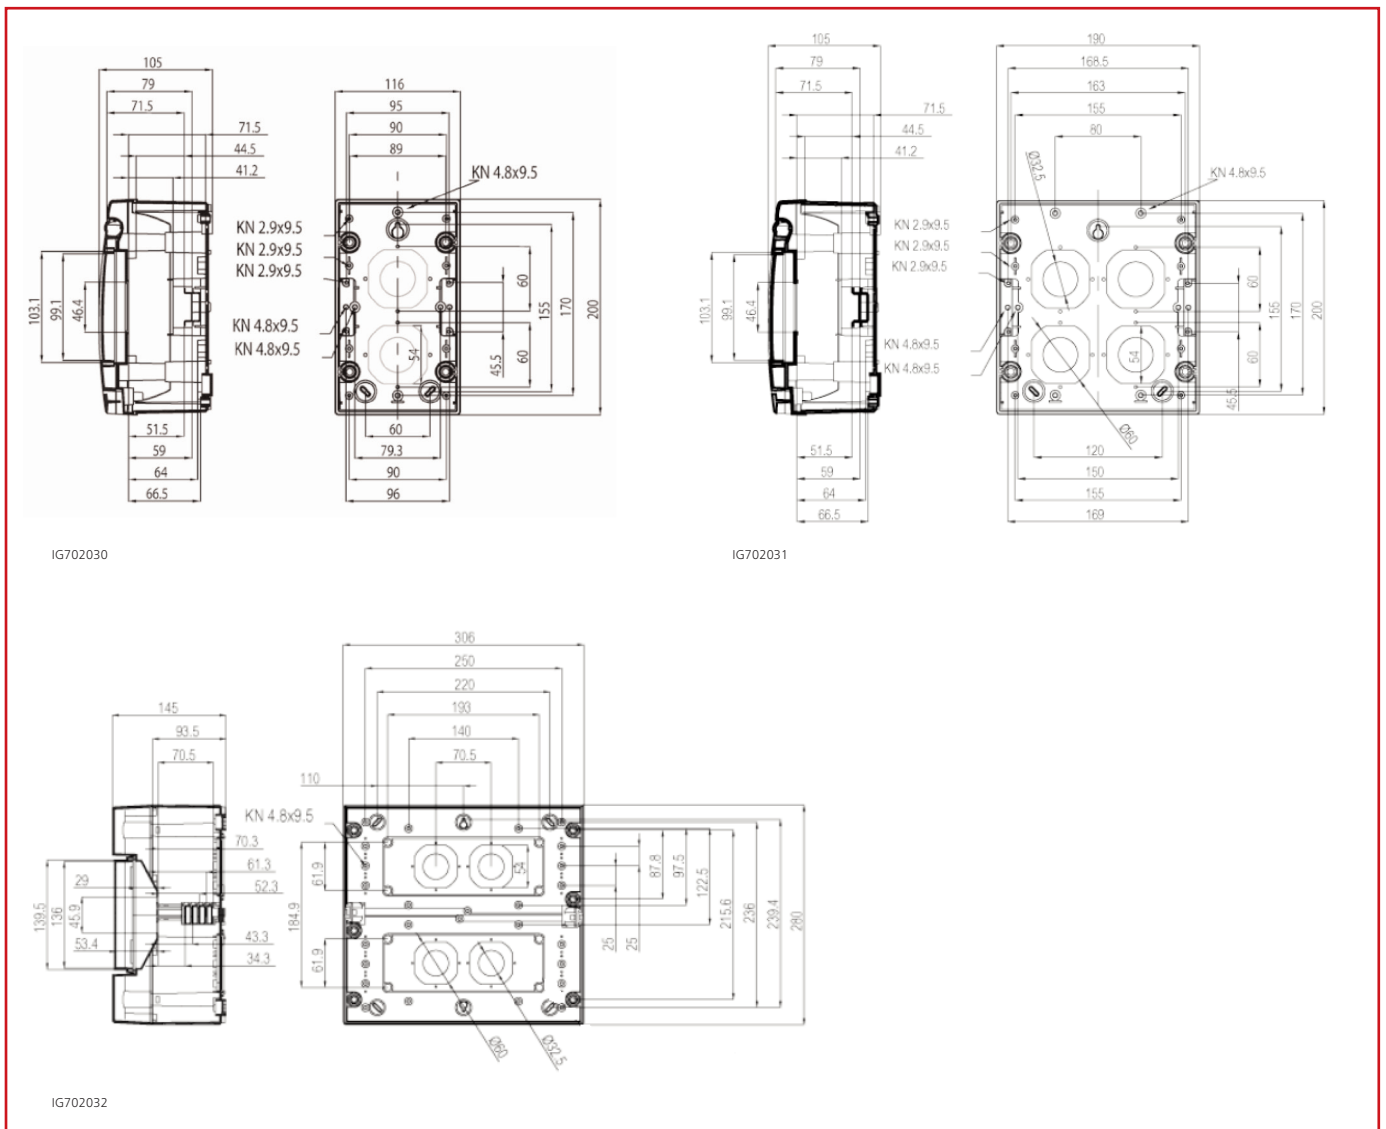

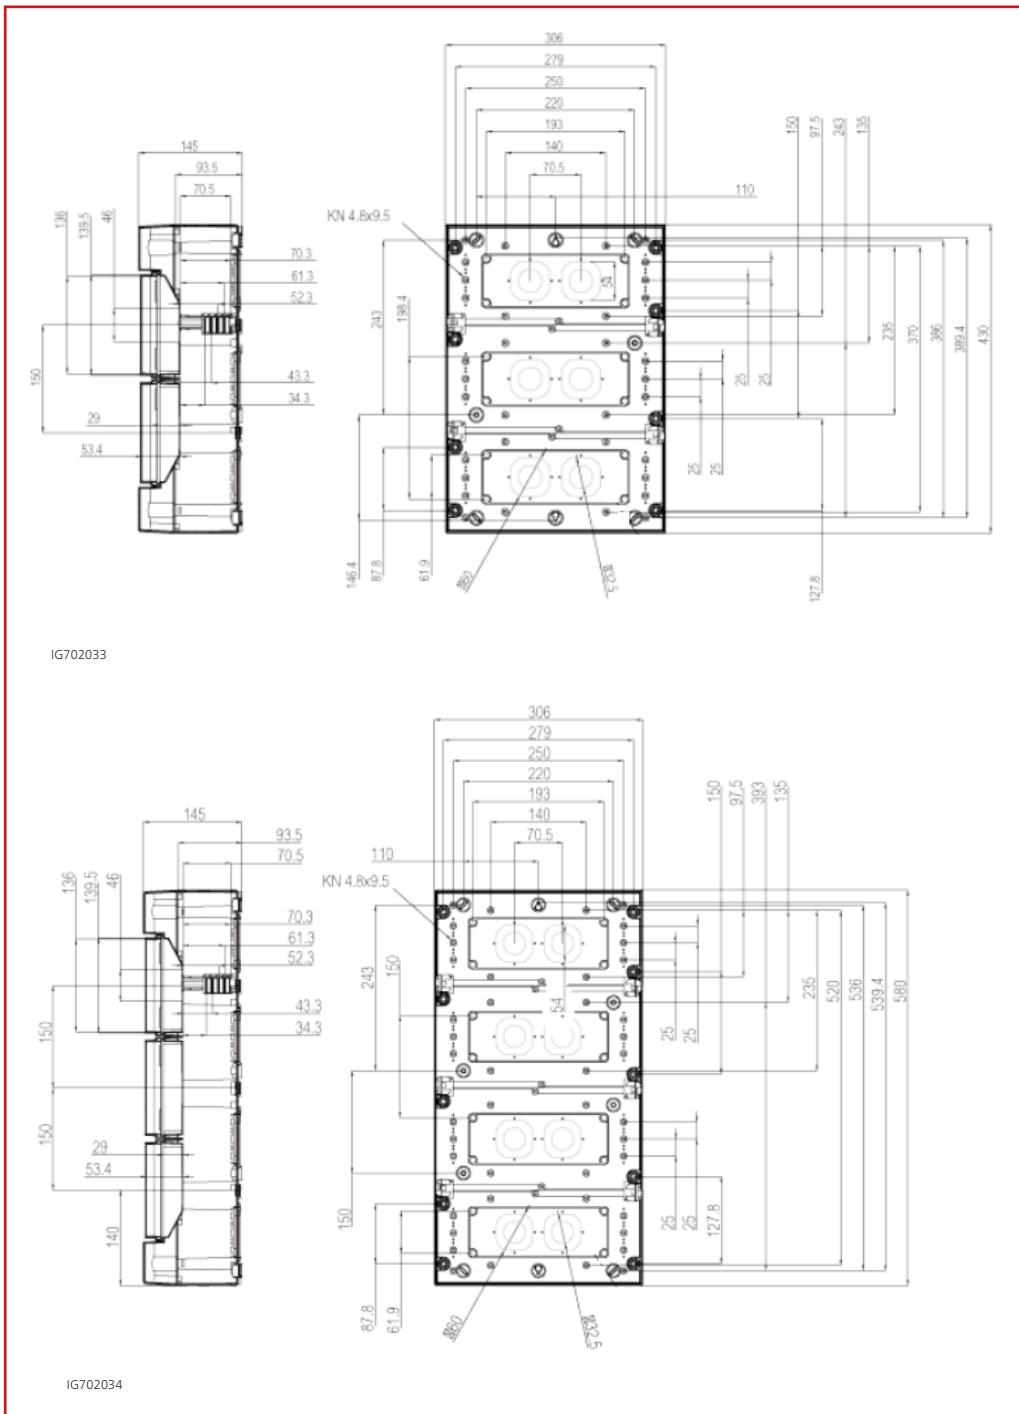

IG702033

IG702034

DESCRIPTION	WxHxD (mm)	ORDER NO.
5 TE - 1-row with hinged lid	116x200x105	IG702030
9 TE - 1-row with hinged lid	190x200x105	IG702031
14 TE - 1- row with door	306x280x145	IG702032
28 TE - 2- row with door	306x430x145	IG702033
42 TE - 3- row with door	306x580x145	IG702034
56 TE - 4- row with door	306x730x145	IG702035