


YOUR BEAMING COMPANION.

ACCESSORIES FOR INDIVIDUAL LIGHT AESTHETICS.

There are many different aspects to light. The possibilities are just as numerous when it is a case of lighting rooms and outside areas. These options can be extended with our accessories, and environments can literally be immersed in new light with different light installations.

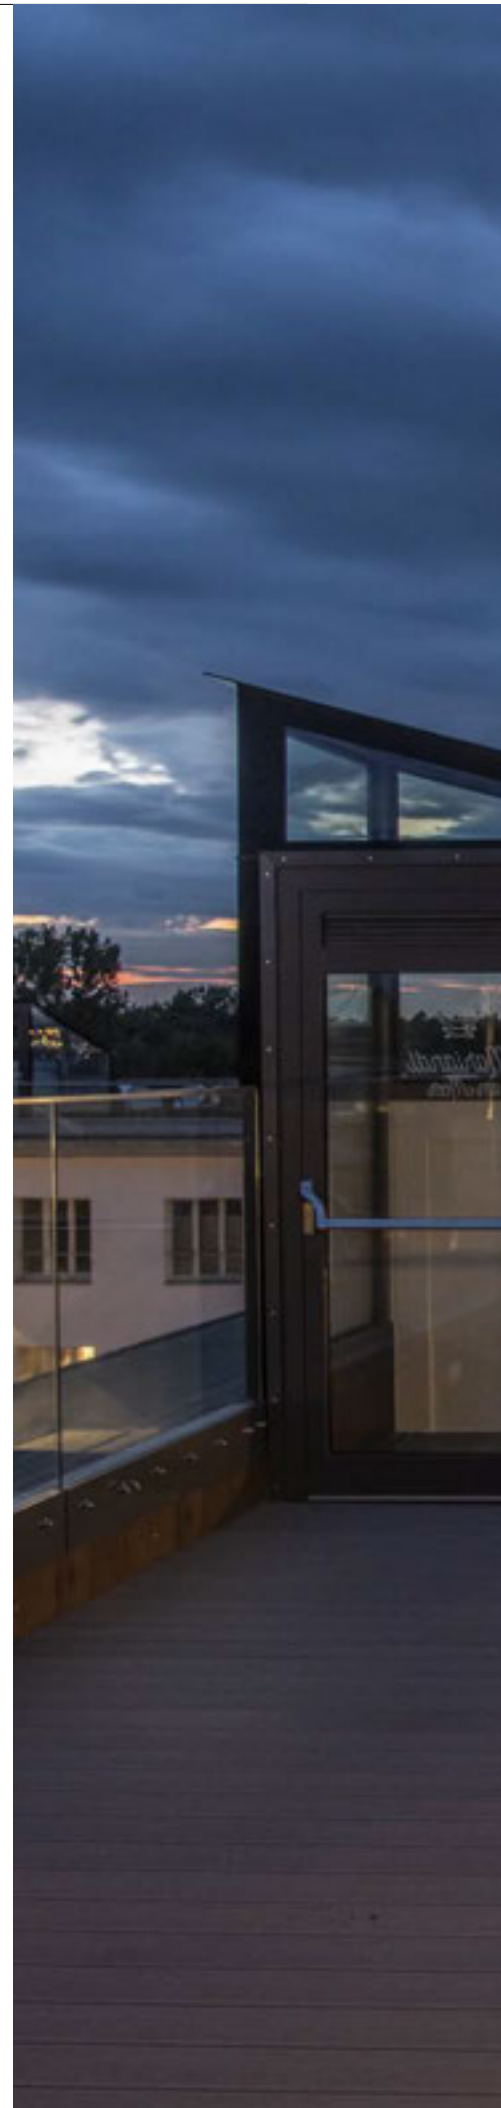

232435 239



FIND A DIMMER. GOOD COMBINATION.

ATMOSPHERIC ROOM LIGHTING THANKS TO THE PERFECT COMBINATION OF LUMINAIRE AND DIMMER. **AT [FIND-A-DIMMER.SLV.COM](https://www.find-a-dimmer.slv.com)**

Attention must be paid to the compatibility of the luminaires or lamps with the dimmer when dimming. And particularly with LED lamps, it must be checked beforehand which dimmer is required. In view of the many different products, it is not always easy to find the best combination. Our "Find a Dimmer" overview should help you to do this. As well as numerous combinations consisting of different luminaires and lamps and

dimmers, at [find-a-dimmer.slv.com](https://www.find-a-dimmer.slv.com) you will also find more information about the minimum number of luminaires or lamps that are needed for problem-free operation. **The overview is updated and extended at regular intervals.**

For specific enquiries, please contact our technical support at service@slv.de.



1 Suitable

- Ideal dimming behaviour
- The minimum number of luminaires/ lamps that are needed for problem-free operation is specified as a number.

Conditionally suitable

- No optimum dimming behaviour
- Flickering possible

Not compatible



[find-a-dimmer.slv.com](https://www.find-a-dimmer.slv.com)



ACCESSORIES

| | | | |
|---|--|---|--|
| Transformers 12V AC  828 | Transformers IP44 12V AC  828 | Transformers TENSEO 12V AC  829 | Transformers 12V AC  830 |
| Transformers 12V AC  830 | DALI interface 1-10V  830 | DALI Universal Dimmer  830 | DALI Controller  830 |
| 1-10V Dimmer  831 | LED mains adapter 12V/24V DC  831 | LED mains adapter 24V DC  831 | LED mains adapter 24V DC  832 |
| Compensation module  833 | LED driver Dimmable  833-835 | LED driver VALETO®  835, 839 | LED driver DALI dimmable  837 |
| LED driver not dimmable  838-839 | Ceiling hook  840 | Cable clamp  840 | Ceiling roses  841 |
| Textile cable 10 m  841 | cable 10 m clear  841 | Wire rope suspension  841 | Stopper for wire rope  841 |
| Connector strip 3 outlets  842 | socket GU10  842 | Cable extensions 1 m 2 m  842 | socket GU10  842 |
| Double-sided tape  842 | Connection boxes  843 | T-connector boxes  843 | |

TRANSFORMER

12V AC | 105VA



Product details

230V -50Hz
L: 11 cm W: 7.5 cm H: 8 cm
Dimmable: L

| | |
|------------------------|--------|
| Voltage sec. | 12V AC |
| Number of outputs sec. | 1 |
| Nominal wattage VA | 105 |
| Wattage up to | 105W |
| Thermal protection | 110°C |

| Variant | Item No. |
|---------|----------|
| white | 451105 |

Manufacturer:
Elektromaschinenbau Wittlich GmbH

TRANSFORMER

12V AC | 300VA



Product details

230V -50Hz
L: 9 cm W: 13 cm H: 11 cm
Dimmable: L

| | |
|------------------------|--------|
| Voltage sec. | 12V AC |
| Number of outputs sec. | 1 |
| Nominal wattage VA | 300 |
| Wattage up to | 300W |
| Thermal protection | 110°C |

| Variant | Item No. |
|---------|----------|
| white | 451301 |

Manufacturer:
Elektromaschinenbau Wittlich GmbH

TRANSFORMER

12V AC | 10VA IP44



Product details

230V -50Hz
Material: plastic
L: 7.5 cm W: 5 cm H: 4.5 cm
Dimmable: L

| | |
|------------------------|--------|
| Voltage sec. | 12V AC |
| Number of outputs sec. | 1 |
| Nominal wattage VA | 10 |
| Wattage up to | 10W |
| Thermal protection | 133°C |

| Variant | Item No. |
|---------|----------|
| black | 227140 |

Manufacturer:
Elektromaschinenbau Wittlich GmbH

TRANSFORMER

12V AC | 60VA IP44




Product details

230V -50Hz
Material: plastic
L: 6 cm W: 10 cm H: 6.3 cm
Dimmable: L

| | |
|------------------------|--------|
| Voltage sec. | 12V AC |
| Number of outputs sec. | 1 |
| Nominal wattage VA | 60 |
| Wattage up to | 60W |
| Thermal protection | 133°C |



| Variant | Item No. |
|---------|----------|
| black | 227160 |

Manufacturer:
Elektromaschinenbau Wittlich GmbH

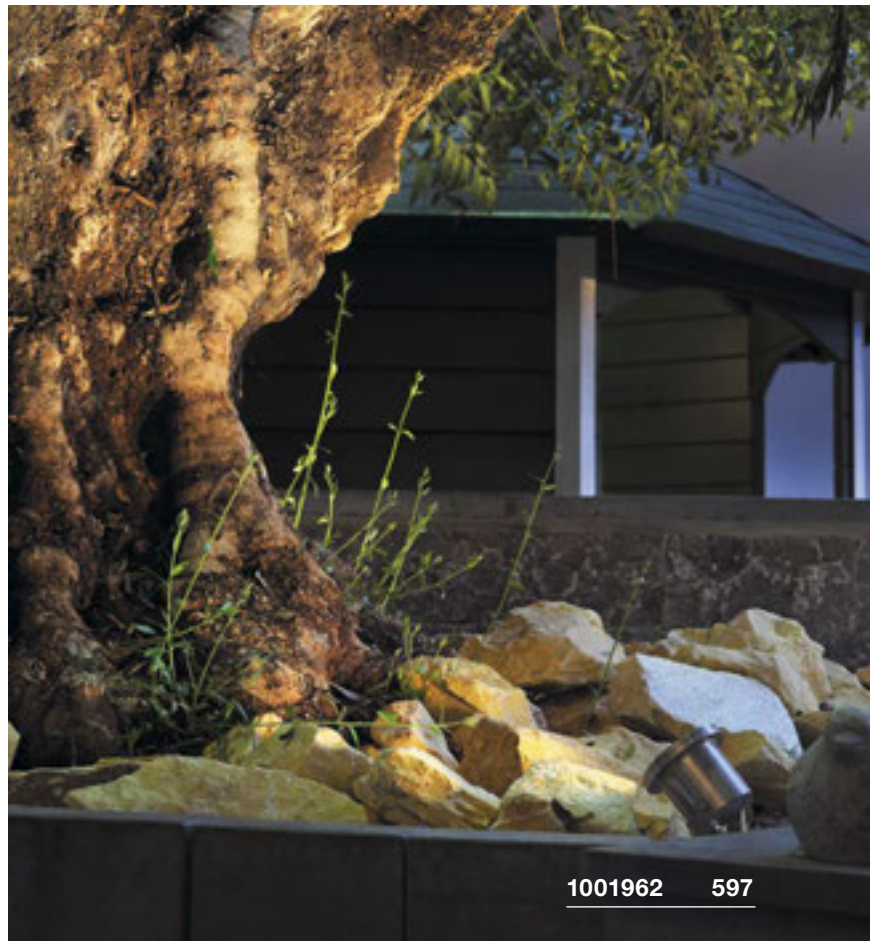

1001962 597

TRANSFORMER TENSEO
12V AC | 50VA

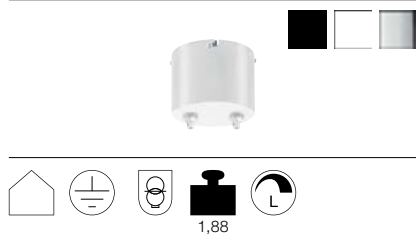



Product details

230V -50Hz
Material: steel/brass
Diameter: 11.1 cm H: 11cm
Dimmable: L

| | |
|------------------------|--------|
| Voltage sec. | 12V AC |
| Number of outputs sec. | 1 |
| Nominal wattage VA | 50 |
| Wattage up to | 50W |
| Thermal protection | 130°C |
| Protection prim. | 1.6A |

| Variant | Item No. |
|----------|----------|
| ■ black | 1002691 |
| □ white | 1002692 |
| ■ chrome | 1002693 |

TRANSFORMER TENSEO
12V AC | 105VA

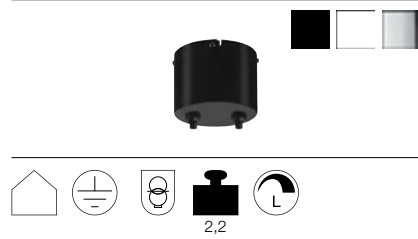


Product details

230V -50Hz
Material: steel/brass
Diameter: 11 cm H: 11 cm
Dimmable: L

| | |
|------------------------|--------|
| Voltage sec. | 12V AC |
| Number of outputs sec. | 1 |
| Nominal wattage VA | 105 |
| Wattage up to | 105W |
| Thermal protection | 130°C |
| Protection prim. | 1.6A |

| Variant | Item No. |
|----------|----------|
| ■ black | 138980 |
| □ white | 138981 |
| ■ chrome | 138982 |

TRANSFORMER TENSEO
12V AC | 210VA

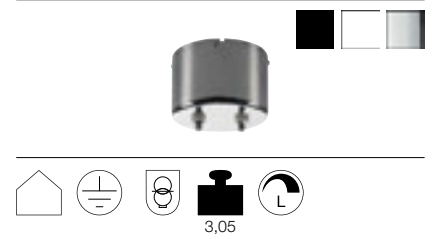


Product details

230V -50Hz
Material: steel/brass
Diameter: 13.5 cm H: 11 cm
Dimmable: L

| | |
|------------------------|--------|
| Voltage sec. | 12V AC |
| Number of outputs sec. | 1 |
| Nominal wattage VA | 210 |
| Wattage up to | 210W |
| Thermal protection | 130°C |
| Protection prim. | 3.15A |

| Variant | Item No. |
|----------|----------|
| ■ black | 138990 |
| □ white | 138991 |
| ■ chrome | 138992 |

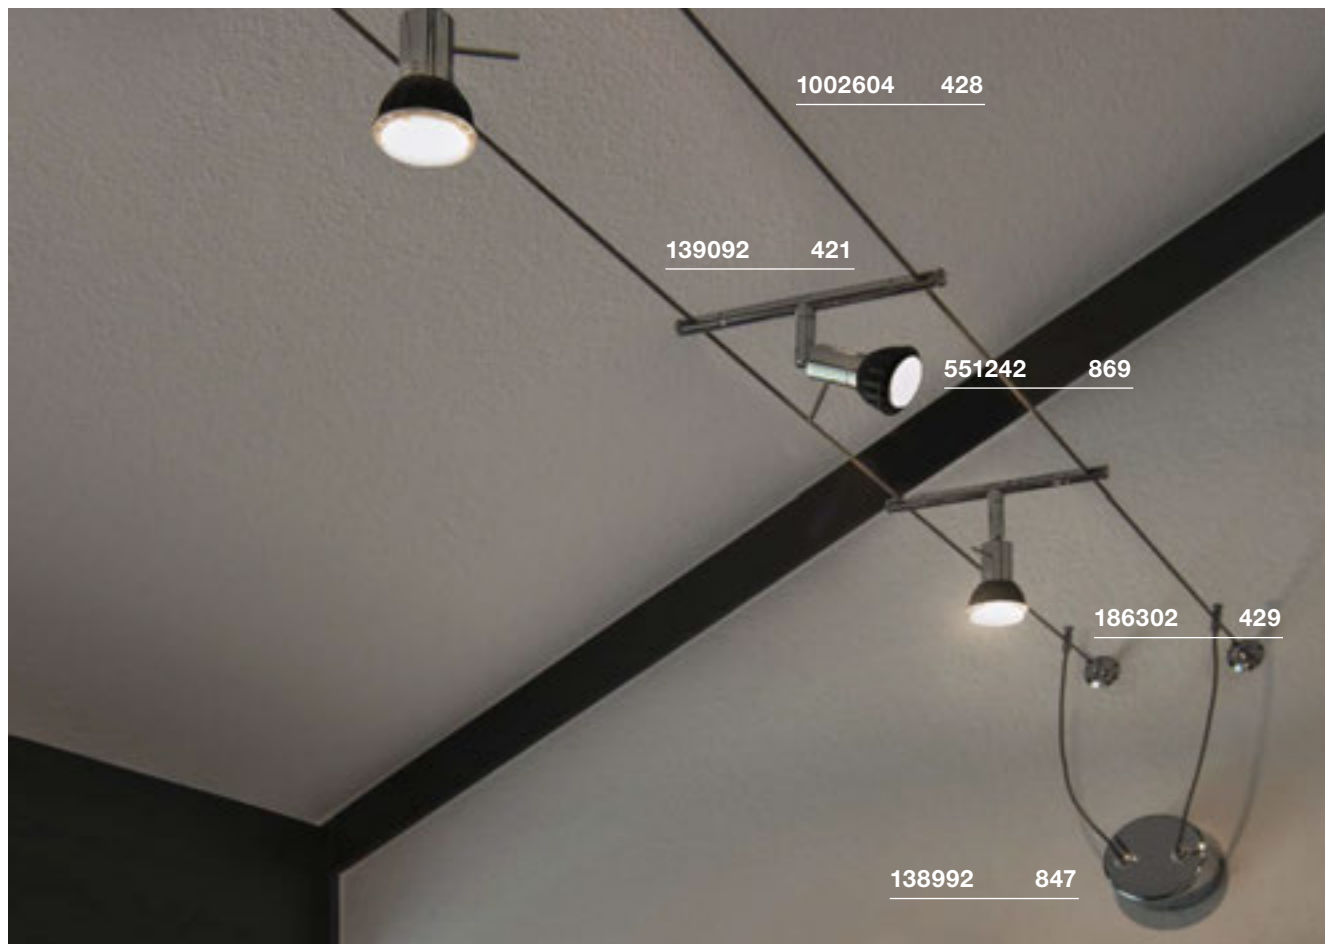

TRANSFORMER

12V AC | 60VA



Product details

230V -50Hz
Material: plastic PC
L: 10.5 cm W: 3.3 cm H: 2.2 cm
Dimmable: C


| | |
|------------------------|--------|
| Voltage sec. | 12V AC |
| Number of outputs sec. | 1 |
| Wattage of | 10W |
| Wattage up to | 60W |
| Power factor | 0,98 |
| Thermal protection | 110°C |

| Variant | Item No. |
|--------------------------------|---------------|
| <input type="checkbox"/> white | 461060 |

Manufacturer:
WeiSen Electronic Co., Ltd

TRANSFORMER

12V AC | 150VA



Product details

230V -50Hz
Material: plastic
L: 16.6 cm W: 3.9 cm H: 3.3 cm
Dimmable: C

| | |
|------------------------|--------|
| Voltage sec. | 12V AC |
| Number of outputs sec. | 3 |
| Wattage of | 50W |
| Wattage up to | 150W |
| Thermal protection | 110°C |
| Protection prim. | 3.15A |

| Variant | Item No. |
|---|---------------|
| <input checked="" type="checkbox"/> black | 461157 |

Manufacturer:
WeiSen Electronic Co., Ltd

DALI INTERFACE

1-10V + on/off



Product details

220-240V ~50/60Hz
Material: plastic
L: 5.85 cm W: 3.25 cm H: 1.5 cm

| | |
|---------------|-------|
| Wattage up to | 1000W |
|---------------|-------|

| Variant | Item No. |
|--|----------------|
| <input checked="" type="checkbox"/> grey | 1002218 |


Manufacturer:
LUNATONE Industrielle Elektronik GmbH

Tip

For controlling electronic ballasts with 1-10V control input. Switching relay for additional on/off switching of the EB power supply. Galvanic isolation of DALI input and 1-10V output

DALI UNIVERSAL DIMMER

3-25W



Product details

220-240V ~50/60Hz
Material: plastic
L: 5.85 cm W: 3.25 cm H: 1.5 cm

Tip

Suitable for R, L, and C load thanks to automatic load detection. DALI current consumption: 6mA


| | |
|---------------|-----|
| Wattage of | 3W |
| Wattage up to | 25W |

| Variant | Item No. |
|--|----------------|
| <input checked="" type="checkbox"/> grey | 1002220 |

Manufacturer:
LUNATONE Industrielle Elektronik GmbH

DALI UNIVERSAL DIMMER

10-300W



Product details

220-240V ~50/60Hz
Material: plastic
L: 12.02 cm W: 3.02 cm H: 2.16 cm

Tip

Suitable for R, L, and C load thanks to automatic load detection. DALI current consumption: 6mA


| | |
|---------------|------|
| Wattage of | 10W |
| Wattage up to | 300W |

| Variant | Item No. |
|--------------------------------|----------------|
| <input type="checkbox"/> white | 1002221 |

Manufacturer:
LUNATONE Industrielle Elektronik GmbH

DALI CONTROLLER

24V DC



Product details


10-24V DC
Material: plastic PC
L: 11.6 cm W: 4.2 cm H: 1.8 cm

Tip

Suitable for controlling LEDs with a constant voltage of 10-24V / DC - Controlsignal DALI or Push-Dim

| Variant | Item No. |
|--|----------------|
| <input checked="" type="checkbox"/> white/grey | 1003106 |

1-10V DIMMER
10W




Product details

10W
Material: plastic PC
L: 2.3 cm W: 3.9 cm H: 2 cm

Tip

Suitable for dimming of
1-10V electronic ballasts


LED MAINS ADAPTER
12V/24V DC | 12W round



Product details

100-240V ~50/60Hz
Material: plastic PC
Diameter: 5.5 cm H: 2.2 cm

LED MAINS ADAPTER
12V/24V DC | 12W



Product details

220-240V ~50/60Hz
Material: plastic PC
L: 8.5 cm W: 4 cm H: 2.2 cm

| | |
|------------------------|------------|
| Voltage sec. | 12V/24V DC |
| Number of outputs sec. | 1 |
| Nominal wattage VA | 12 |
| Wattage up to | 12W |
| Thermal protection | 110°C |

| | |
|------------------------|------------|
| Voltage sec. | 12V/24V DC |
| Number of outputs sec. | 2 |
| Wattage up to | 12W |
| Thermal protection | 110°C |

| Variant | Item No. |
|--------------------------------|----------|
| <input type="checkbox"/> white | 470505 |

Manufacturer:
WeiSen Electronic Co., Ltd


| Variant | Item No. |
|--------------------------------------|----------|
| <input type="checkbox"/> white 12V | 470545 |
| <input type="checkbox"/> white 24V | 470546 |

Manufacturer:
WeiSen Electronic Co., Ltd

| Variant | Item No. |
|--------------------------------------|----------|
| <input type="checkbox"/> white 12V | 470507 |
| <input type="checkbox"/> white 24V | 470502 |

Manufacturer:
WeiSen Electronic Co., Ltd

LED MAINS ADAPTER
12V/24V DC | 20W



Product details

230V -50Hz
Material: plastic PC
L: 16.6 cm W: 3.9 cm H: 3.3 cm


LED MAINS ADAPTER
24V DC | 36W



Product details

100-240 V~50/60Hz
Material: plastic PC
L: 12.9 cm W: 7.5 cm H: 3.2 cm

LED MAINS ADAPTER
24V DC | 60W



Product details

220-240V ~50/60Hz
Material: plastic PC
L: 17.5 cm W: 7.8 cm H: 3.5 cm

| | |
|------------------------|------------|
| Voltage sec. | 12V/24V DC |
| Number of outputs sec. | 1 |
| Wattage up to | 20W |
| Thermal protection | 110°C |

| | |
|------------------------|--------|
| Voltage sec. | 24V DC |
| Number of outputs sec. | 1 |
| Wattage up to | 36W |
| Power factor | 0,9 |
| Thermal protection | 110°C |

| | |
|------------------------|--------|
| Voltage sec. | 24V DC |
| Number of outputs sec. | 2 |
| Wattage up to | 60W |
| Power factor | 0,95 |
| Thermal protection | 110°C |

| Variant | Item No. |
|--------------------------------------|----------|
| <input type="checkbox"/> white 12V | 470541 |
| <input type="checkbox"/> white 24V | 470542 |

Manufacturer:
WeiSen Electronic Co., Ltd


| Variant | Item No. |
|---|----------|
| <input checked="" type="checkbox"/> black | 470544 |

Manufacturer:
WeiSen Electronic Co., Ltd

| Variant | Item No. |
|--------------------------------|----------|
| <input type="checkbox"/> white | 470506 |

Manufacturer:
WeiSen Electronic Co., Ltd

LED MAINS ADAPTER 24V | 100W



Product details


220-240V ~50/60Hz
Material: metal
L: 34.7 cm W: 4 cm H: 2.2 cm
Dimmable: Dali

| | |
|--------------------|-------|
| Voltage sec. | 24V |
| Wattage of | 1W |
| Wattage up to | 100W |
| Thermal protection | 110°C |
| Power factor | 0,9 |

| Variant | Item No. |
|----------|----------|
| ■ silver | 1004776 |

Manufacturer:
WeiSen Electronic Co., Ltd

LED MAINS ADAPTER 24V DC | 100W



Product details


220-240V ~50/60Hz
Material: plastic PC
L: 18.2 cm W: 8.8 cm H: 3.5 cm

| | |
|------------------------|--------|
| Voltage sec. | 24V DC |
| Number of outputs sec. | 2 |
| Wattage up to | 100W |
| Power factor | 0,95 |
| Thermal protection | 110°C |

| Variant | Item No. |
|---------|----------|
| ■ black | 470500 |

Manufacturer:
WeiSen Electronic Co., Ltd

LED MAINS ADAPTER 24V DC | 150W



Product details

220-240V ~50/60Hz
Material: plastic PC
L: 20.7 cm W: 11 cm H: 4.5 cm

| | |
|------------------------|--------|
| Voltage sec. | 24V DC |
| Number of outputs sec. | 1 |
| Wattage up to | 150W |
| Thermal protection | 110°C |

| Variant | Item No. |
|---------|----------|
| ■ black | 470549 |

Manufacturer:
WeiSen Electronic Co., Ltd

LED MAINS ADAPTER 24V DC | 150W



Product details


220-240V ~50/60Hz
Material: plastic PC
L: 23.4 cm W: 11.4 cm H: 4.9 cm

| | |
|------------------------|--------|
| Voltage sec. | 24V DC |
| Number of outputs sec. | 1 |
| Wattage up to | 150W |
| Thermal protection | 110°C |

| Variant | Item No. |
|---------|----------|
| ■ black | 470548 |

Manufacturer:
WeiSen Electronic Co., Ltd

LED MAINS ADAPTER 24V DC | 20W



Product details


220-240V ~50/60Hz
Material: plastic PC
L: 14.6 cm W: 5.5 cm H: 1.9 cm
Dimmable: 1-10V

| | |
|------------------------|--------|
| Voltage sec. | 24V DC |
| Number of outputs sec. | 1 |
| Wattage up to | 20W |
| Thermal protection | 100°C |

| Variant | Item No. |
|---------|----------|
| ■ white | 470547 |

Manufacturer:
TCI Telecomunicazioni Italia Srl

LED MAINS ADAPTER 24V DC | 100W



Product details

220-240V ~50/60Hz
Material: plastic PC
L: 19 cm W: 13 cm H: 3.5 cm
Dimmable: 1-10V

| | |
|------------------------------------|---|
| Voltage sec. | 24V DC |
| Number of outputs sec. | 3 |
| Wattage up to | 100W |
| Wattage/outlet | 33W |
| Power factor | 0,95 |
| Thermal protection | 110°C |
| Protection in the event of a fault | Short circuit protected & open circuit proof °C |

| Variant | Item No. |
|---------|----------|
| ■ black | 470540 |

Manufacturer:
WeiSen Electronic Co., Ltd

LED MAINS ADAPTER 24V DC | 50W




Product details

220-240V ~50/60Hz
Material: plastic PC
L: 18.4 cm W: 6.1 cm H: 3.2 cm
Dimmable: C

| | |
|--------------------|--------|
| Voltage sec. | 24V DC |
| Wattage of | 12W |
| Wattage up to | 50W |
| Thermal protection | 110°C |

| Variant | Item No. |
|------------|----------|
| white/blue | 1003104 |

LED MAINS ADAPTER 24V DC | 100W




Product details

220-240V ~50/60Hz
Material: plastic PC
L: 21 cm W: 6.7 cm H: 3.4 cm
Dimmable: C

| | |
|--------------------|--------|
| Voltage sec. | 24V DC |
| Wattage of | 34W |
| Wattage up to | 100W |
| Thermal protection | 110°C |

| Variant | Item No. |
|------------|----------|
| white/blue | 1003105 |

COMPENSATION MODULE



Product details

220-240V ~50/60Hz
Material: plastic PC
L: 9.5 cm Diameter: 1.5 cm


Tip

Reduces or eradicates problems encountered when dimming, such as flickering or flashing, or if the LED illumination is not 100% eliminated when switched off. The compensator is always connected after the dimmer or switch and parallel to the downlight spot or LED driver.

| | |
|--------------------|--------|
| Voltage sec. | 24V DC |
| Wattage of | 34W |
| Wattage up to | 100W |
| Thermal protection | 110°C |

| Variant | Item No. |
|---------|----------|
| black | 1002785 |

LED ADAPTER 350mA | 6W



Product details


220-240V ~50/60Hz
Material: plastic PC
L: 6.3 cm W: 4 cm H: 2.3 cm
Dimmable: C

| | |
|--------------------|-----------|
| Voltage sec. | 10-17V DC |
| Wattage of | 3.5W |
| Wattage up to | 5.9W |
| Power factor | 0,9 |
| Thermal protection | 110°C |

| Variant | Item No. |
|---------|----------|
| white | 1002791 |

Manufacturer:
WeiSen Electronic Co., Ltd

LED DRIVER 350mA | 10W



Product details


220-240V ~50/60Hz
Material: plastic PC
L: 8.5 cm W: 4.1 cm H: 2.2 cm
Dimmable: C

| | |
|--------------------|-----------|
| Voltage sec. | 17-29V DC |
| Output current | 350mA |
| Wattage | 10W |
| Wattage of | 5.95W |
| Wattage up to | 10.15W |
| Power factor | 0,9 |
| Thermal protection | 110°C |

| Variant | Item No. |
|---------|----------|
| white | 464140 |

Manufacturer:
WeiSen Electronic Co., Ltd

LED DRIVER 350mA | 15W




Product details

220-240V ~50/60Hz
Material: plastic PC
L: 8.5 cm W: 4.1 cm H: 2.2 cm
Dimmable: C

| | |
|--------------------|-----------|
| Voltage sec. | 18-30V DC |
| Output current | 350mA |
| Wattage of | 9W |
| Wattage up to | 15W |
| Power factor | 0,9 |
| Thermal protection | 110°C |

| Variant | Item No. |
|---------|----------|
| white | 1002803 |

Manufacturer:
WeiSen Electronic Co., Ltd

LED DRIVER
500mA | 15W



Product details

220-240V ~50/60Hz
Material: plastic PC
L: 8.5 cm W: 4.1 cm H: 2.2 cm
Dimmable: C

| | |
|--------------------|-----------|
| Voltage sec. | 26-43V DC |
| Output current | 500mA |
| Wattage of | 9.1W |
| Wattage up to | 15W |
| Power factor | 0,9 |
| Thermal protection | 110°C |

| Variant | Item No. |
|--------------------------------|---------------|
| <input type="checkbox"/> white | 464144 |

Manufacturer:
WeiSen Electronic Co., Ltd

LED DRIVER
700mA | 6W

Product details

220-240V ~50/60Hz
Material: plastic PC
L: 6.3 cm W: 4 cm H: 2.3 cm
Dimmable: C


Tip

Suitable with mounting boxes with a diameter of 60 mm and a min. installation depth of 42 mm

| | |
|--------------------|----------|
| Voltage sec. | 4.8-8.6V |
| Output current | 700mA |
| Wattage of | 3.4W |
| Wattage up to | 6W |
| Power factor | 0,9 |
| Thermal protection | 110°C |

| Variant | Item No. |
|--------------------------------|----------------|
| <input type="checkbox"/> white | 1002792 |

Manufacturer:
WeiSen Electronic Co., Ltd

LED DRIVER
700mA | 10W inc. strain relief


Product details

220-240V ~50/60Hz
Material: plastic PC
L: 8.5 cm W: 4.1 cm H: 2.2 cm
Dimmable: C

| | |
|--------------------|--------|
| Voltage sec. | 40-57V |
| Output current | 700mA |
| Wattage of | 6W |
| Wattage up to | 10.5W |
| Power factor | 0,9 |
| Thermal protection | 110°C |

| Variant | Item No. |
|--------------------------------|---------------|
| <input type="checkbox"/> white | 464142 |

Manufacturer:
WeiSen Electronic Co., Ltd

LED DRIVER
700mA | 39W inc. strain relief


Product details

220-240V ~50/60Hz
Material: PC
L: 16.6 cm W: 5.2 cm H: 2.4 cm
Dimmable: C

| | |
|--------------------|--------|
| Voltage sec. | 28-56V |
| Output current | 700mA |
| Wattage of | 20W |
| Wattage up to | 39W |
| Power factor | 0,95 |
| Thermal protection | 110°C |

| Variant | Item No. |
|--|----------------|
| <input checked="" type="checkbox"/> white/blue | 1001267 |

Manufacturer:
WeiSen Electronic Co., Ltd

LED DRIVER
700mA | 40W inc. strain relief


Product details

220-240V ~50/60Hz
Material: plastic PC
L: 15.3 cm W: 6.7 cm H: 3 cm
Dimmable: C

| | |
|--------------------|--------|
| Voltage sec. | 40-57V |
| Output current | 700mA |
| Wattage of | 28W |
| Wattage up to | 39.9W |
| Power factor | 0,9 |
| Thermal protection | 110°C |

| Variant | Item No. |
|--------------------------------|----------------|
| <input type="checkbox"/> white | 1001114 |

Manufacturer:
WeiSen Electronic Co., Ltd

LED DRIVER
1000mA | 40W

Product details


220-240V ~50/60Hz
Material: plastic PC
L: 15.3 cm W: 6.7 cm H: 3 cm
Dimmable: C

| | |
|------------------------|--------|
| Voltage sec. | 28-40V |
| Output current | 1000mA |
| Number of outputs sec. | 1 |
| Wattage of | 28W |
| Wattage up to | 40W |
| Power factor | 0,9 |
| Thermal protection | 110°C |

| Variant | Item No. |
|--------------------------------|----------------|
| <input type="checkbox"/> white | 1001115 |

Manufacturer:
WeiSen Electronic Co., Ltd

LED DRIVER
1050mA | 40W inc. strain relief



Product details

220-240V ~50/60Hz
Material: plastic PC
L: 16.6 cm W: 5.2 cm H: 2.4 cm
Dimmable: C

| | |
|------------------------|--------|
| Voltage sec. | 19-38 |
| Output current | 1050mA |
| Number of outputs sec. | 2 |
| Wattage up to | 40W |
| Power factor | 0,95 |
| Thermal protection | 110°C |

| Variant | Item No. |
|--------------------------------|---------------|
| <input type="checkbox"/> white | 464804 |

LED DRIVER
200mA | 6-8.4W inc. strain relief




Product details

220-240V ~50/60Hz
Material: Polycarbonate (PC)
L: 8.5 cm W: 4.1 cm H: 2.2 cm

| | |
|------------------------|--------|
| Voltage sec. | 30-42V |
| Output current | 250mA |
| Number of outputs sec. | 1 |
| Wattage of | 6W |
| Wattage up to | 8.4W |
| Power factor | 0,9 |
| Thermal protection | 110°C |

| Variant | Item No. |
|--------------------------------|----------------|
| <input type="checkbox"/> white | 1003254 |

LED DRIVER
250mA | 10W



Product details


220-240V ~50/60Hz
Material: Polycarbonate (PC)
L: 6.5 cm W:3.9 cm H: 2 cm

| | |
|------------------------|-----------|
| Voltage sec. | 26-40V DC |
| Output current | 250mA |
| Number of outputs sec. | 1 |
| Wattage of | 6.5W |
| Wattage up to | 10W |
| Power factor | 0,9 |
| Thermal protection | 110°C |

| Variant | Item No. |
|--------------------------------|----------------|
| <input type="checkbox"/> white | 1004780 |

Manufacturer:
WeiSen Electronic Co., Ltd

SLV VALETO®
350/500/700mA | 15W, LED driver



Product details

220-240V~50/60Hz
Wattage: 15W
L: 19 cm W: 6.1 cm H: 3 cm
Material: plastic


Tip

Remote-controllable and dimmable with SLV VALETO® CCT/RGBW remote control [1002994] or Gateway [1002411]

| | |
|------------------------------------|---------------|
| Output current | 350/500/700mA |
| Number of outputs sec. | 1 |
| Wattage | 15W |
| Environmental temp. min. | -20°C |
| Environmental temp. max. | 40°C |
| Protection in the event of a fault | electronic |

| Variant | Item No. |
|--------------------------------|----------------|
| <input type="checkbox"/> white | 1002082 |

LED DRIVER
500/600/700mA | 30W inc. strain relief



Product details


220-240V ~50/60Hz
Material: Polycarbonate (PC)
L: 14.7 cm W: 4.3 cm H: 3 cm

| | |
|------------------------|----------------|
| Voltage sec. | 30-42V DC |
| Output current | 500/600/700 mA |
| Number of outputs sec. | 1 |
| Wattage of | 21W |
| Wattage up to | 29.5W |
| Power factor | 0,9 |
| Thermal protection | 110°C |

| Variant | Item No. |
|--------------------------------|----------------|
| <input type="checkbox"/> white | 1004781 |

Manufacturer:
WeiSen Electronic Co., Ltd

LED DRIVER
800/900/1050mA | 40W inc. strain relief



Product details

220-240V ~50/60Hz
Material: Polycarbonate (PC)
L: 14.7 cm W: 4.3 cm H: 3 cm

| | |
|------------------------|-----------------|
| Voltage sec. | 30-42V DC |
| Output current | 800/900/1050 mA |
| Number of outputs sec. | 1 |
| Wattage of | 31.5W |
| Wattage up to | 44W |
| Power factor | 0,9 |
| Thermal protection | 110°C |

| Variant | Item No. |
|--------------------------------|----------------|
| <input type="checkbox"/> white | 1004782 |

Manufacturer:
WeiSen Electronic Co., Ltd



1002631 339

1002675 335

DALI – THE FLEXIBLE LIGHTING SOLUTION

What is DALI? DALI is a system for freely configuring flexible light scenarios and arrangements. This bus-compatible system makes it possible to individually access, control and evaluate light and all components of a lighting system. Luminaires, groups of luminaires and even the lighting of entire buildings are controlled in this way.

You can create a special atmosphere in your retail premises with our DALI system. Your lighting is configured in a flexible way by using DALI spotlights in conjunction with our special DALI adapters and tracks. Thanks to the wide range of accessories, any configuration that is required can be realised. Be it ceiling or wall installation, or as a pendant.

The tracks consist of an extruded aluminium profile that is painted in white or black. The tracks are available in different lengths with an integrated 2-core DALI cable, and can be cut to length in accordance with requirements. Suitable luminaires with a high CRI of >90 are also available for this system.

LED DRIVER DALI
250-700mA | 20W inc. strain relief



Product details

220-240V ~50/60Hz
Material: PC
L: 15 cm W: 5.2 cm H: 2.8 cm
Dimmable: 1-10V / Dali

Tip

250/350/500/700mA
Output current can be adjusted using DIP switch

| | |
|--------------------|-------|
| Voltage sec. | 6-60V |
| Wattage of | 1.5W |
| Wattage up to | 20W |
| Thermal protection | 110°C |
| Power factor | 0,9 |

| Variant | Item No. |
|--------------------------------|----------------|
| <input type="checkbox"/> white | 1002423 |

Manufacturer:
WeiSen Electronic Co., Ltd

LED DRIVER DALI
250-700mA | 40W inc. strain relief



Product details

220-240V ~50/60Hz
Material: PC
L: 12.3 cm W: 7.9 cm H: 2.4 cm
Dimmable: 1-10V / Dali

Tip


250/350/500/700mA
Output current can be adjusted using DIP switch

| | |
|--------------------|-------|
| Voltage sec. | 6-58V |
| Wattage of | 1.5W |
| Wattage up to | 40W |
| Thermal protection | 110°C |
| Power factor | 0,9 |

| Variant | Item No. |
|--------------------------------|----------------|
| <input type="checkbox"/> white | 1002424 |

Manufacturer:
WeiSen Electronic Co., Ltd

LED DRIVER DALI
350-1050mA | 60W inc. strain relief



Product details

220-240V ~50/60Hz
Material: PC
L: 12.4 cm W: 7.9 cm H: 2.2 cm
Dimmable: 1-10V / Dali

Tip

350/500/550/650/700/750/
850/900/1000/1050mA
Output current can be adjusted using DIP switch

| | |
|--------------------|-------|
| Voltage sec. | 2-74V |
| Wattage of | 1W |
| Wattage up to | 60W |
| Thermal protection | 110°C |
| Power factor | 0,95 |

| Variant | Item No. |
|--------------------------------|---------------|
| <input type="checkbox"/> white | 464032 |

Manufacturer:
TCI Telecomunicazioni Italia Srl

LED DRIVER DALI
700-1500mA | 50W inc. strain relief



Product details

220-240V ~50/60Hz
Material: PC
L: 12.3 cm W: 7.9 cm H: 2.4 cm
Dimmable: 1-10V / Dali


Tip

700/800/900/1050/1200/1300/1400mA
Output current can be adjusted using DIP switch

| | |
|--------------------|-------|
| Voltage sec. | 6-58V |
| Wattage of | 4.2W |
| Wattage up to | 50W |
| Thermal protection | 110°C |
| Power factor | 0,9 |

| Variant | Item No. |
|--------------------------------|----------------|
| <input type="checkbox"/> white | 1002425 |

Manufacturer: WeiSen Electronic Co., Ltd

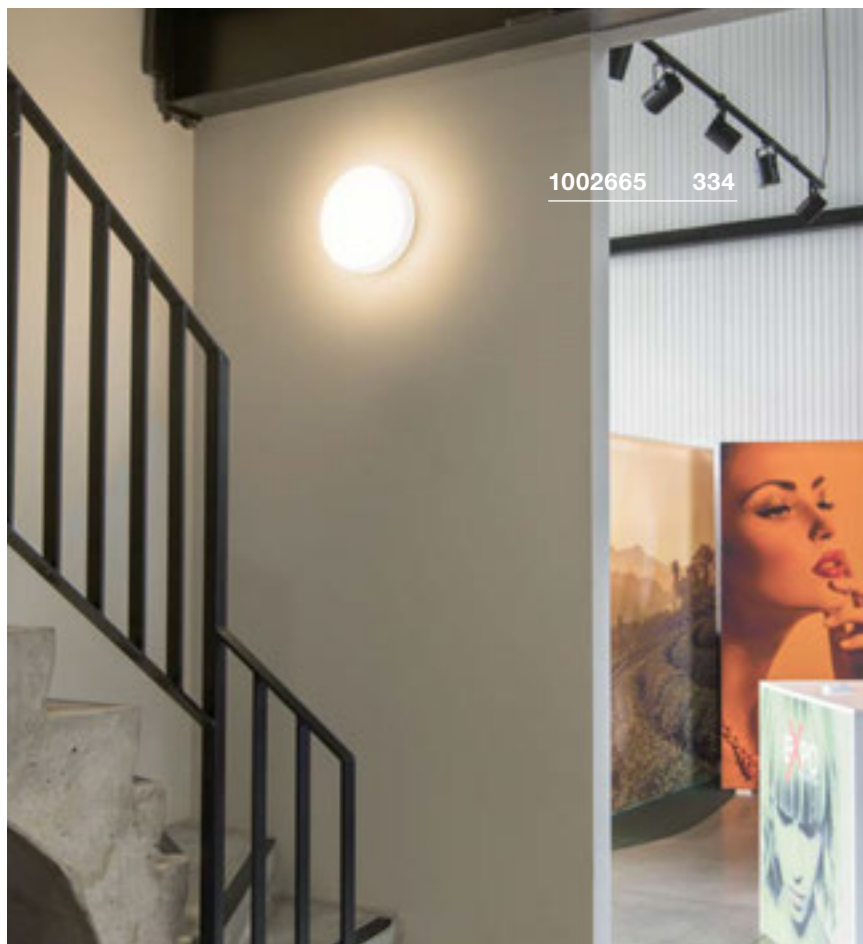

LED DRIVER

320mA | 3W inc. strain relief



Product details

100-240V ~50/60Hz
Material: plastic PC
L: 5.5 cm W: 3.9 cm H: 2 cm


| | |
|---------------------|-------|
| Voltage sec. | 3-9V |
| Output current | 320mA |
| Wattage of | 1W |
| Wattage up to | 3W |
| Power factor | 0,4 |
| Thermal protection | 110°C |
| Wattage-L sec. max. | 2 m |

| Variant | Item No. |
|--------------------------------|----------|
| <input type="checkbox"/> white | 464108 |

Manufacturer:
WeiSen Electronic Co., Ltd

LED DRIVER

350mA | 3W inc. strain relief



Product details

230V -50Hz
Material: plastic PC
L: 5.6 cm W: 3.9 cm H: 2 cm

Tip

350mA AMP plug included




| | |
|---------------------|-------|
| Voltage sec. | 3-9V |
| Output current | 350mA |
| Wattage of | 1W |
| Wattage up to | 3W |
| Power factor | 0,4 |
| Thermal protection | 110°C |
| Wattage-L sec. max. | 2 m |

| Variant | Item No. |
|--------------------------------|----------|
| <input type="checkbox"/> white | 464107 |

Manufacturer:
WeiSen Electronic Co., Ltd

LED DRIVER

350mA | 9W inc. strain relief



Product details

230V -50Hz
Material: plastic PC
L: 8.5 cm W: 4.1 cm H: 2.2 cm


| | |
|---------------------|-------|
| Voltage sec. | 3-26V |
| Output current | 350mA |
| Wattage of | 1W |
| Wattage up to | 9W |
| Power factor | 0,4 |
| Thermal protection | 110°C |
| Wattage-L sec. max. | 2 m |

| Variant | Item No. |
|--------------------------------|----------|
| <input type="checkbox"/> white | 464109 |

Manufacturer:
WeiSen Electronic Co., Ltd

LED DRIVER

350mA inc. strain relief



Product details

220-240V ~50/60Hz
Material: plastic PC
L: 15.8 cm W: 2.2 cm H: 1.9 cm


| | |
|------------------------|-------|
| Output current | 350mA |
| Number of outputs sec. | 1 |
| Wattage up to | 15W |
| Power factor | 0,6 |
| Thermal protection | 100°C |

| Variant | Item No. |
|--------------------------------|----------|
| <input type="checkbox"/> white | 464031 |

Manufacturer:
TCI Telecomunicazioni Italia Srl

LED DRIVER

500mA | 9W inc. strain relief




Product details

100-240V ~50/60Hz
Material: plastic PC
L: 6.5 cm W: 3.9 cm H: 2 cm

| | |
|------------------------|--------|
| Voltage sec. | 12-19V |
| Output current | 500mA |
| Number of outputs sec. | 1 |
| Wattage of | 6W |
| Wattage up to | 9W |
| Power factor | 0,9 |
| Thermal protection | 110°C |
| Wattage-L sec. max. | 2 m |

| Variant | Item No. |
|--------------------------------|----------|
| <input type="checkbox"/> white | 464091 |

Manufacturer:
WeiSen Electronic Co., Ltd

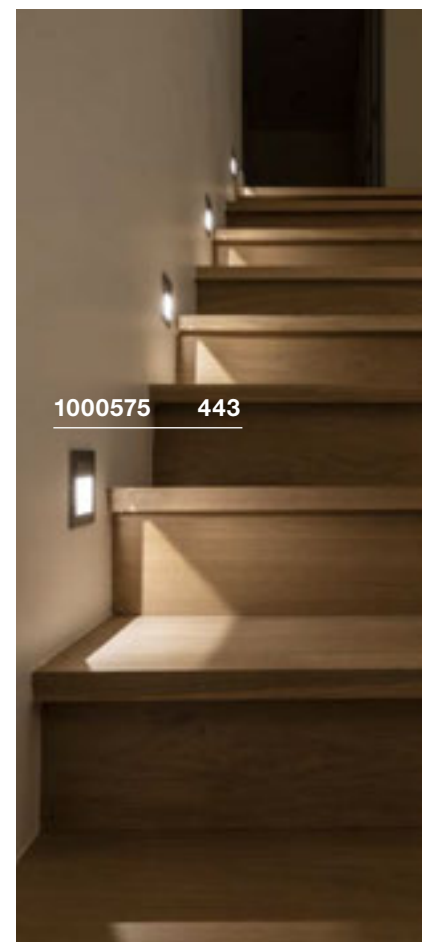

1000575 443

LED DRIVER

700mA | 3W inc. strain relief



Product details

230V ~50Hz
Material: plastic PC
L: 5.5 cm W: 3.9 cm H: 2 cm


| | |
|---------------------|-------|
| Voltage sec. | 4-5V |
| Output current | 700mA |
| Wattage up to | 3W |
| Power factor | 0,4 |
| Thermal protection | 110°C |
| Wattage-L sec. max. | 2 m |

| Variant | Item No. |
|--------------------------------|---------------|
| <input type="checkbox"/> white | 464200 |

Manufacturer:
WeiSen Electronic Co., Ltd

LED DRIVER

700mA | 11W inc. strain relief



Product details

220-240V ~50/60Hz
Material: plastic PC
L: 15.5 cm W: 2.2 cm H: 1.9 cm

| | |
|--------------------|-------|
| Output current | 700mA |
| Wattage up to | 11W |
| Power factor | 0,6 |
| Thermal protection | 100°C |

| Variant | Item No. |
|--------------------------------|---------------|
| <input type="checkbox"/> white | 464030 |

Manufacturer:
TCI Telecomunicazioni Italia Srl

LED DRIVER

700mA | 40W inc. strain relief



Product details

100-240V ~50/60Hz
Material: plastic PC
L: 12.9 cm W: 7.5 cm H: 3.2 cm


| | |
|---------------------|--------|
| Voltage sec. | 29-58V |
| Output current | 700mA |
| Wattage of | 20W |
| Wattage up to | 40W |
| Power factor | 0,9 |
| Thermal protection | 110°C |
| Wattage-L sec. max. | 2 m |

| Variant | Item No. |
|---|---------------|
| <input checked="" type="checkbox"/> black | 464168 |

Manufacturer:
WeiSen Electronic Co., Ltd

LED DRIVER VALETO®

1050mA | 45W inc. strain relief



Product details

100-240V ~50/60Hz
Material: plastic
L: 19 cm W: 6.1 cm H: 3 cm

Tip

Remote control and dimming with gateway
[1002411]


| | |
|------------------------|--------|
| Voltage sec. | 30-42V |
| Output current | 1050mA |
| Number of outputs sec. | 1 |
| Wattage | 42W |
| Wattage of | 31.5W |
| Wattage up to | 45W |
| Power factor | 0,95 |
| Thermal protection | 110°C |
| Wattage-L sec. max. | 2 m |

| Variant | Item No. |
|--------------------------------|----------------|
| <input type="checkbox"/> white | 1001249 |

Manufacturer:
WeiSen Electronic Co., Ltd

LED DRIVER

1000mA | 40W inc. strain relief



Product details

100-240V ~50/60Hz
Material: plastic PC
L: 12.9 cm W: 7.5 cm H: 3.2 cm

| | |
|------------------------|--------|
| Voltage sec. | 20-40V |
| Output current | 1000mA |
| Number of outputs sec. | 1 |
| Wattage of | 20W |
| Wattage up to | 40W |
| Power factor | 0,9 |
| Thermal protection | 110°C |
| Wattage-L sec. max. | 2 m |

| Variant | Item No. |
|---|---------------|
| <input checked="" type="checkbox"/> black | 464170 |

Manufacturer:
WeiSen Electronic Co., Ltd



CEILING HOOK



132670 840



0,04

Product details

Material: aluminium

Diameter: 1.8 cm L: 4.6 cm

| Variant | Item No. |
|---|----------|
| <input checked="" type="checkbox"/> black | 132670 |
| <input type="checkbox"/> white | 132671 |



CABLE CLAMP



132680 840



0,01

Product details


Material: aluminium

Diameter: 1.4 cm L: 3.1 cm

| Variant | Item No. |
|---|----------|
| <input checked="" type="checkbox"/> black | 132680 |
| <input type="checkbox"/> white | 132681 |



CEILING ROSE

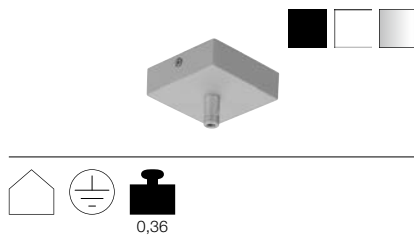


Product details

230V -50Hz
Material: aluminium
L: 8.5 cm W: 8.5 cm H: 2.7 cm

Max. current load 8.5A

| Variant | Item No. |
|--------------|----------|
| ■ black matt | 210060 |
| □ white matt | 210061 |
| ■ silver | 210064 |


TEXTILE CABLE
3-pole, 3 x 0.75 mm², 10m

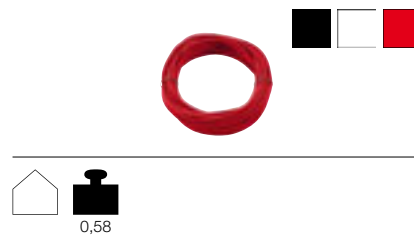

Product details

Max. voltage 300V
Material: PVC
Diameter: 0.6cm L: 1000 cm

CABLE
3-pole, 3x0.75mm², 10m

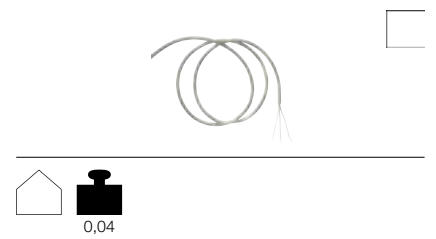


Product details

Max. voltage 300V
L: 1000 cm

| Variant | Item No. |
|---------------|----------|
| □ transparent | 961250 |

WIRE ROPE SUSPENSION

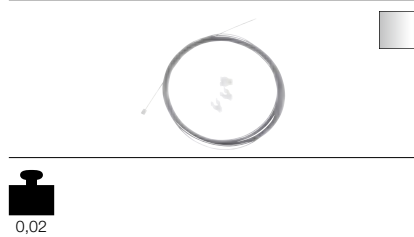

Product details


Material: steel/plastic
Diameter: 0.15cm L: 500 cm

mech. Max. load 40 kg

| Variant | Item No. |
|----------|----------|
| ■ silver | 961037 |

Manufacturer:
Reutlinger GmbH


STOPPER FOR WIRE ROPE

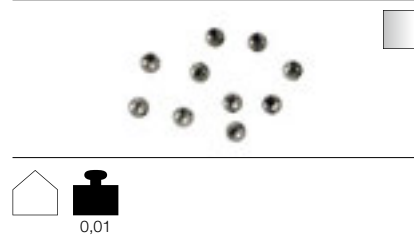

Product details

Material: steel
Diameter: 0.8 cm
10 piece


| Variant | Item No. |
|----------|----------|
| ■ silver | 961034 |

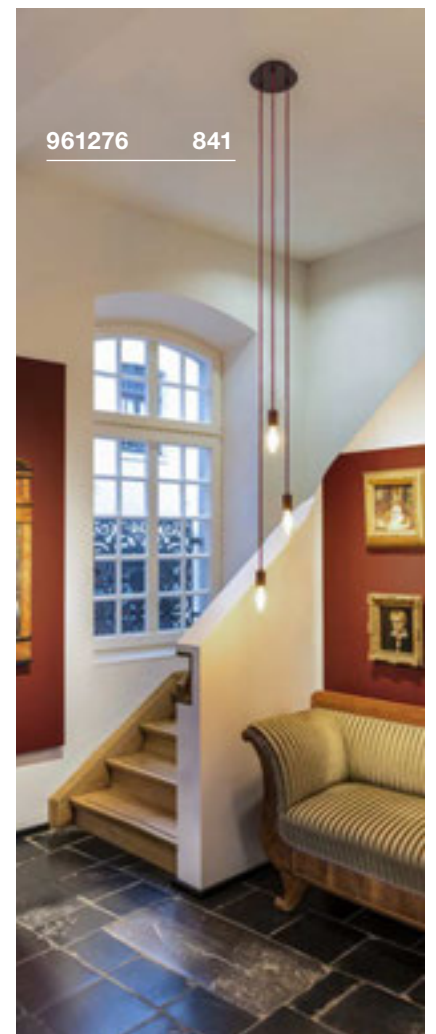

961276 841

CONNECTOR STRIP

3 outlets



0,02

Product details

Material: plastic
L: 5.2 cm W: 1.4 cm H: 1.3 cm

Tip

For 350mA plug-in system

CABLE EXTENSION



0,02

Product details

Material: plastic
L: 100 cm

Tip

With AMP plug and socket
For 350mA plug-in system

GU10 SOCKET

with connection box and quick clamp



0,065

Product details

L: 27 cm

| Variant | Item No. |
|---------|----------|
| ■ black | 111850 |

| Variant | Item No. |
|---------|----------|
| | 111861 |

| Variant | Item No. |
|---------------|----------|
| ■ white/black | 1000909 |

GU10 SOCKET



0,02

Product details

230V -50Hz
Material: ceramic
L: 300 cm W: 0.9 cm

DOUBLE-SIDED TAPE



Product details

L: 300 cm W: 0.9 cm

| Variant | Item No. |
|---------|----------|
| □ white | 955135 |

| Variant | Item No. |
|---------|----------|
| □ clear | 220000 |



CONNECTOR BOX



Product details

230V -50Hz
Material: PA66 GF
Diameter: 2.7 cm L: 11.5 cm


Tip

3-pole

Max. voltage 450V
Max. current load 17.5mA

| Variant | Item No. |
|---------|----------|
| ■ black | 228730 |

CONNECTOR BOX



Product details

230V -50Hz
Material: PA66 GF
Diameter: 3.2 cm L: 13 cm


Tip

5-pole

Max. voltage 450V
Max. current load 32mA

| Variant | Item No. |
|---------|----------|
| ■ black | 228725 |

T-CONNECTOR BOX



Product details


230V -50Hz
Material: PA66
L: 11 cm W: 6.4 cm H: 3 cm

Tip

3-pole

Max. voltage 500V
Max. current load 17.5mA

| Variant | Item No. |
|---------|----------|
| ■ black | 228726 |

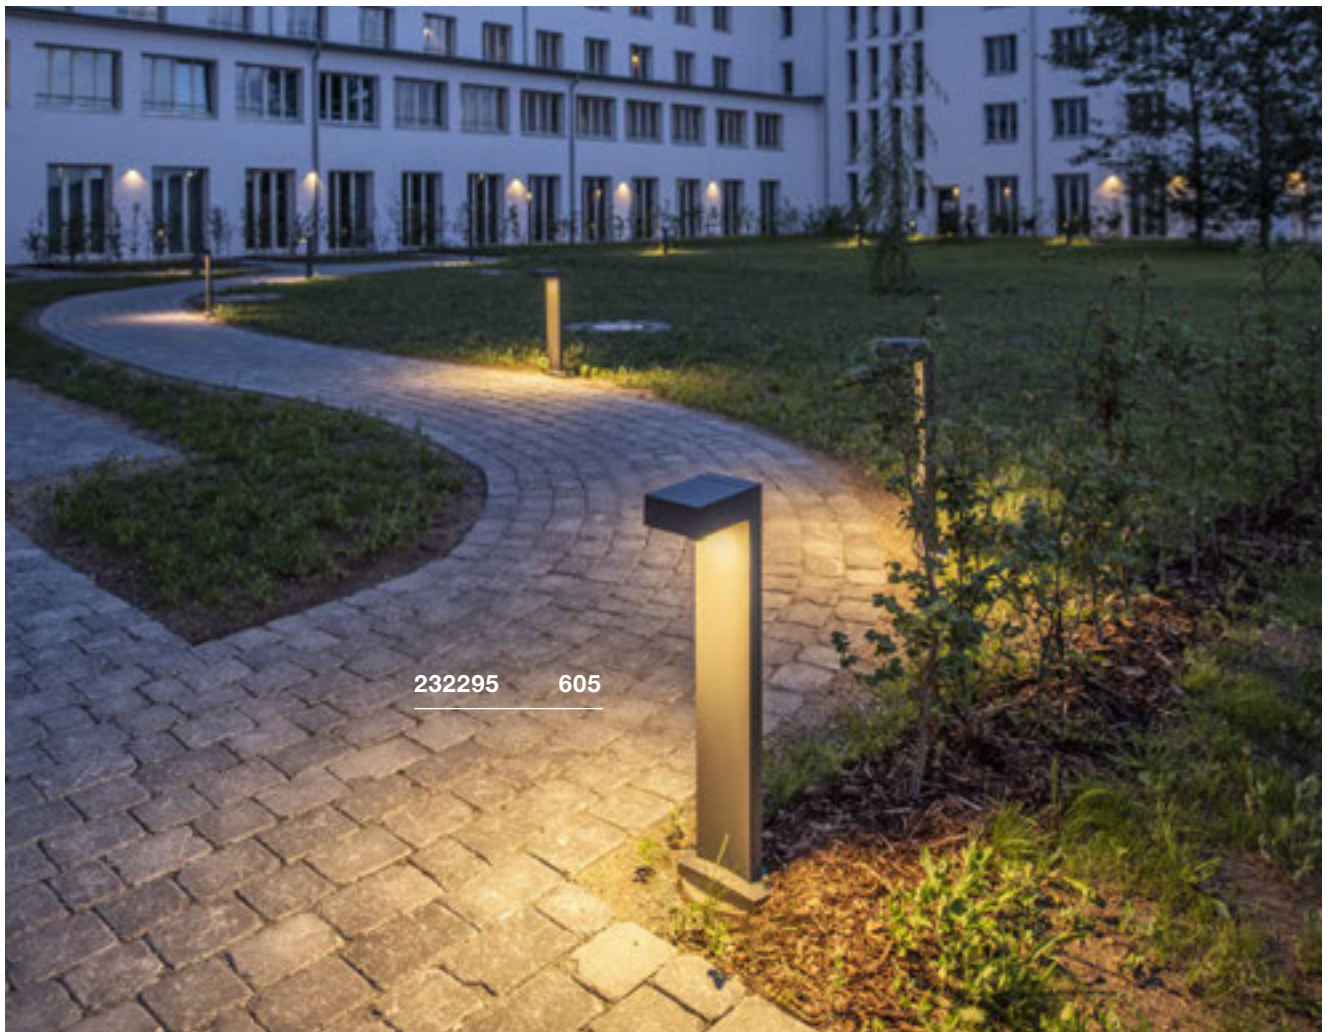

232295 605