

## DOMESTIC AXIAL FANS


### ELMARK AF SERIES



- Rated voltage: 220-240V
- IP code: IP-X4
- Insulation class: B

#### AREAS OF APPLICATION:

- Kitchens
- Showers
- Bathrooms
- Utility spaces

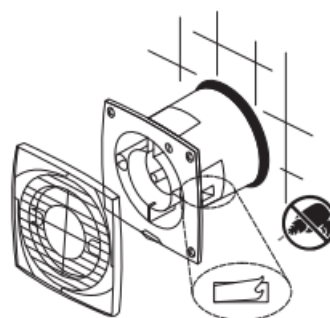

#### DESIGN:



- Easy mounting system
- Very slim front panel
- Plastic housing and impeller
- Modern design and aesthetic look



# TECHNICAL SPECIFICATION

## MOTOR :

- Equipped with thermal cut out protection
- Low power consumption
- High materials quality and high efficiency
- Ambient temperature max 130°C

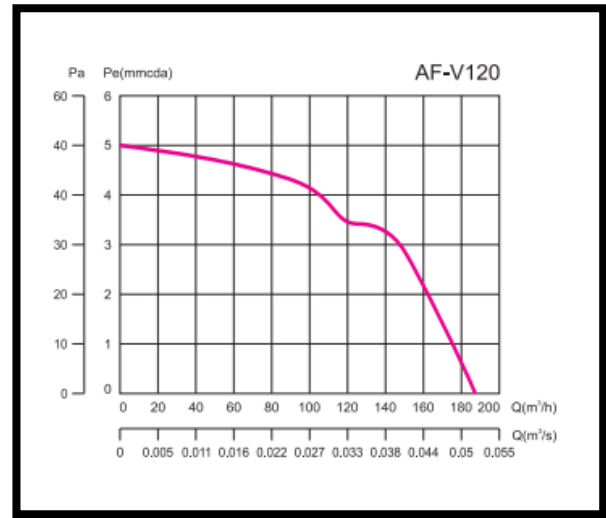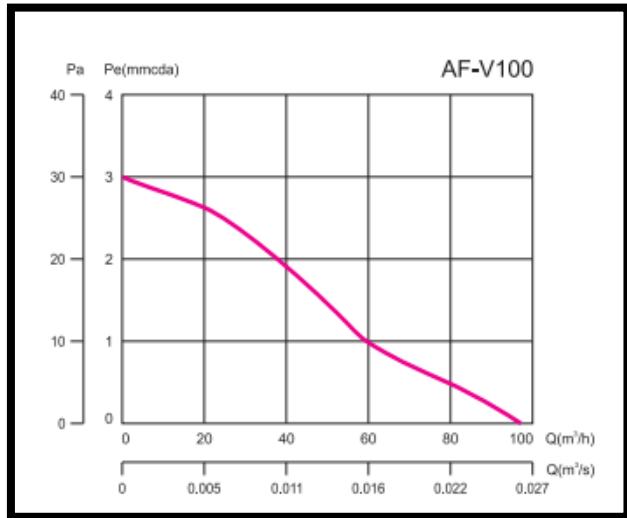


## OPTIONS :

<b>V-Valve:</b>	Back flow preventing.	Fan is equipped with a valve.	Compatible with 100 and 120 mm PVC or flexible air ducts.
<b>VT- Timer + Valve:</b>	Adjustable operating time from 3 to 15 minutes.	Fan is equipped with a valve.	Compatible with 100 and 120 mm PVC or flexible air ducts.
<b>VH- Higo-Timer + Valve:</b>	Humidistat detects humidity starting from 40% to 90%, includes adjustable.	Fan is equipped with a valve.	Compatible with 100 and 120 mm PVC or flexible air ducts.

# TECHNICAL SPECIFICATION

## DIMENSIONS :

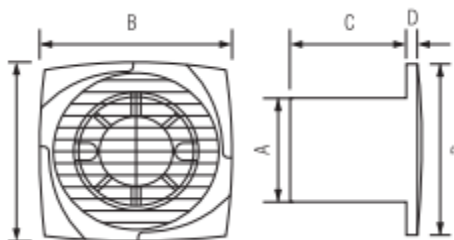

Overall dimensions (mm)				
Model	ØA	B	C	D
AF-V100	98	140	98	10
AF-V120	118	170	100	13

## VARIANTS :

Model	Diameter	Power	r.p.m	Maximum air capacity	Sound pressure level db	Packing	Catalogue number
	(mm)	(W)		(m3/h)	(A)		
AF-V100 with valve	100	15	2500	98	41	12	<b>500120</b>
AF-VT100 with valve+timer	100	15	2500	98	41	12	<b>500122</b>
AF-VH100 with valve+ hygro-timer	100	15	2500	98	41	12	<b>500124</b>
AF-V120 with valve	120	20	2450	190	43	12	<b>500121</b>
AF-VT120 with valve+timer	120	20	2450	190	43	12	<b>500123</b>
AF-VH120 with valve+ hygro-timer	120	20	2450	190	43	12	<b>500125</b>

## BARCODES :

<b>3800131203779</b>	<b>500120</b>
<b>3800131203793</b>	<b>500122</b>
<b>3800131203816</b>	<b>500124</b>
<b>3800131203786</b>	<b>500121</b>
<b>3800131203809</b>	<b>500123</b>
<b>3800131203823</b>	<b>500125</b>