



RATED VOLTAGE
~690V

gS


Time/current characteristics of fuse-links Ultra Quick M - size 00C, 00

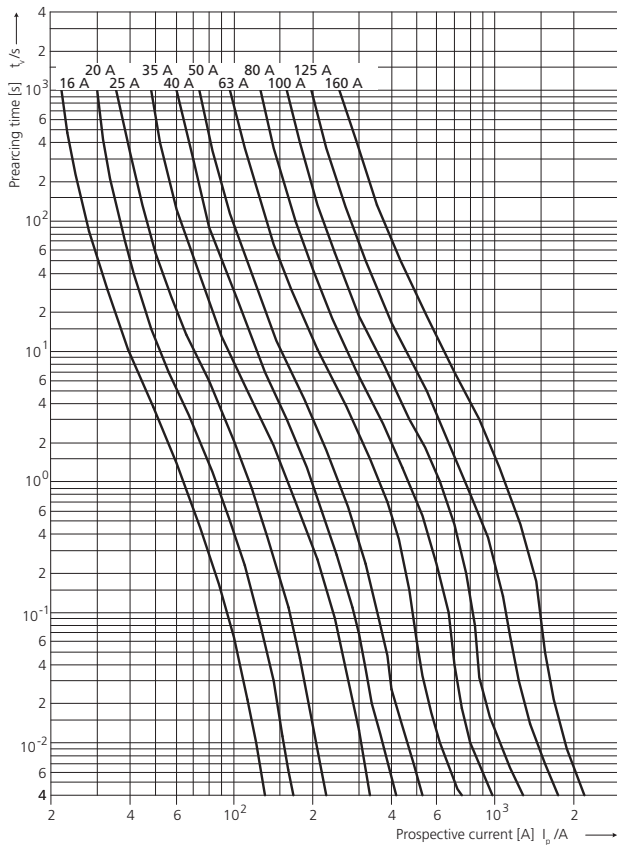


Conversion factor for total Joule integral

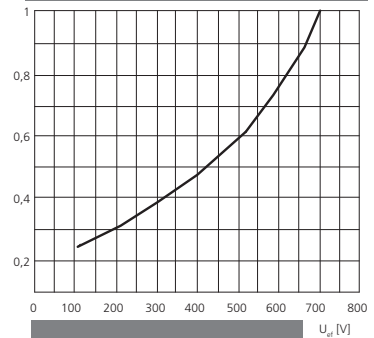


Maximum arc voltage occurring

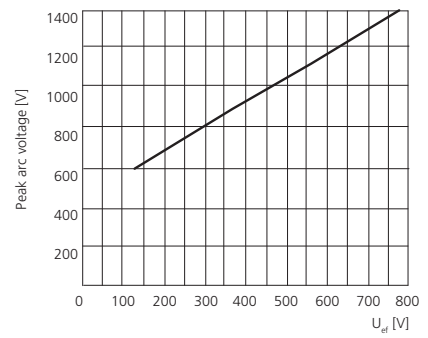

Correction factor for converting the power diss. for percentage load

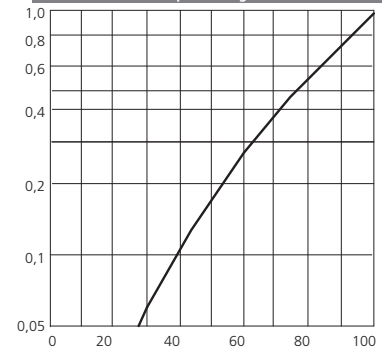

Cut-off characteristics of fuse-links Ultra Quick M - size 00C, 00

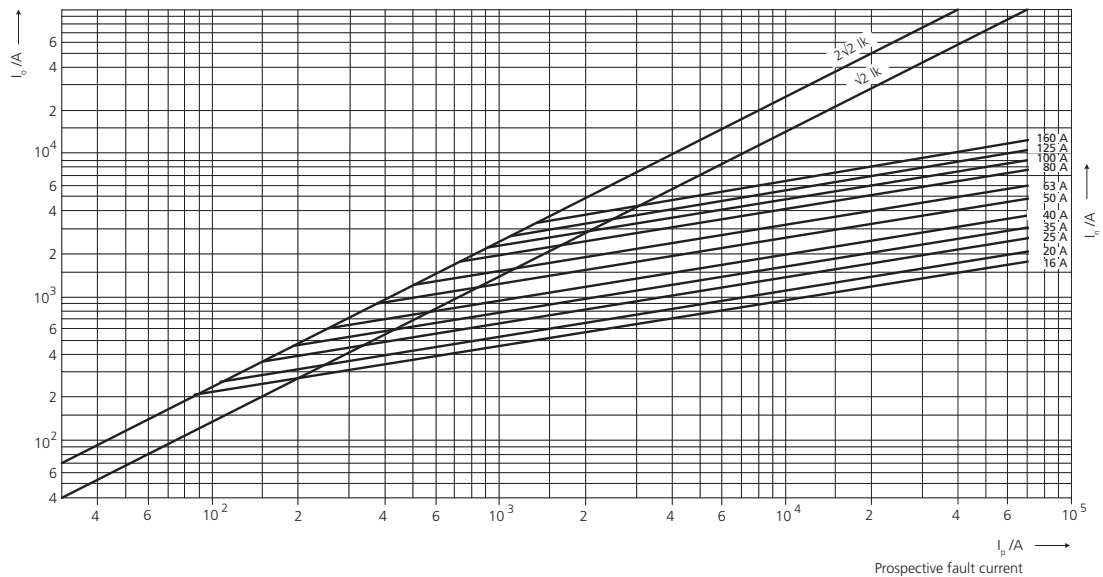


ULTRA QUICK


gS

RATED VOLTAGE
~690V


Time/current characteristics of fuse-links Ultra Quick M, S

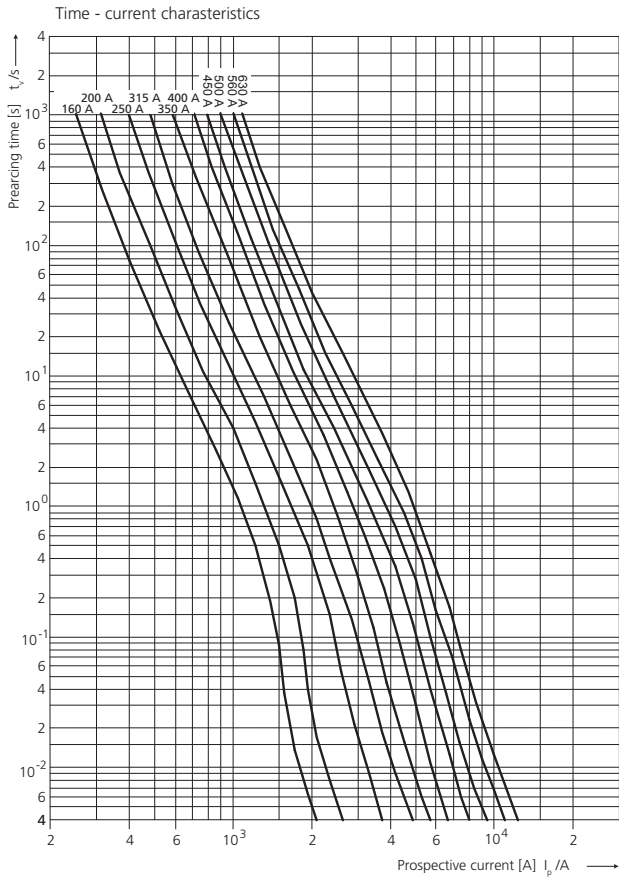


Conversion factor for total Joule integral

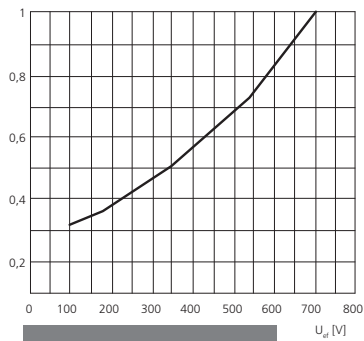

Maximum arc voltage occurring

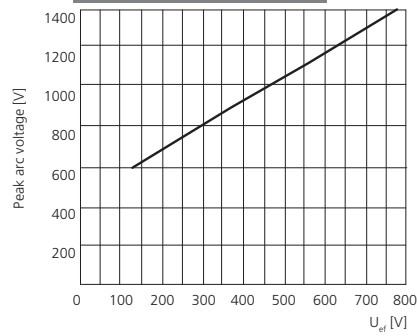

Correction factor for converting the power diss. for percentage load

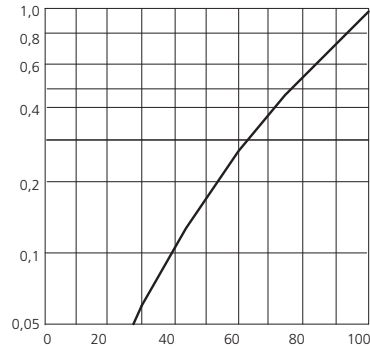

Cut-off characteristics of fuse-links Ultra Quick M, S - size 1, 2, 3

