


# Product Technical Sheet

12 Aug 2021 09:52

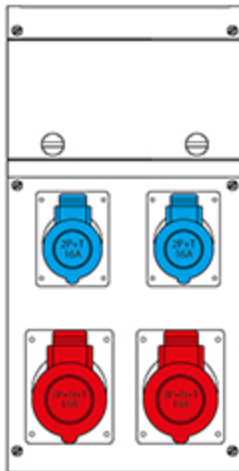

## 630.4106-006 DISTRIBUTION ASSEMBLY (ACS)

4 NR IP44 212x415x105mm

Product Approvals

| TECHDATA                      |                             | STANDARDS AND LAWS                |   |
|-------------------------------|-----------------------------|-----------------------------------|---|
| Protection degree             | Splash proof                | EN 61439-4 (2013-03)              | [European Standard] Low-voltage switchgear and controlgear assemblies - Part 4: Particular requirements for assemblies for construction sites (ACS) |
| Mounting version              | WITH STAND                  |                                   |   |
| Type of product               | DISTRIBUTION ASSEMBLY (ACS) | DIRECTIVE LOW VOLTAGE 2014/35 /UE | [European Directives] Low Voltage Directive   |
| Commercial series             | BLOCK Series                | DIRECTIVE EMC 2014/30/UE          | [European Directives] Electromagnetic Compatibility Directive   |
| Synthetical description       | DISTRIBUTION ASSEMBLY (ACS) |                                   |   |
| Material                      | THERMOPLASTIC               |                                   |   |
| Dimensions                    | 212x415x105mm               |                                   |   |
| Protection degree IP          | IP44                        |                                   |   |
| Protection degree IK          | IK08                        |                                   |   |
| Inlet supply unit             | Plug                        |                                   |   |
| No. of available outlets      | 4 NR                        |                                   |   |
| No. of sockets 2P+E 16A       | 2 NR                        |                                   |   |
| No. of sockets 3P+N+E 16A     | 2 NR                        |                                   |   |
| In disp. ing/tipo apparecchio | MCB 4P 16A                  |                                   |   |
| In disp. ing/tipo apparecchio | RCD 4P 25A 0,03A            |                                   |   |
| Max power                     | 9 KW                        |                                   |   |