




1.17

ORION




LED




PC




RAB/BAR/RAB




ABS



PCA/APC/PCA







x2



850°C

APLICACIONES INDICADAS / SUITABLE APPLICATIONS / APPLICATIONS APPROPRIÉES

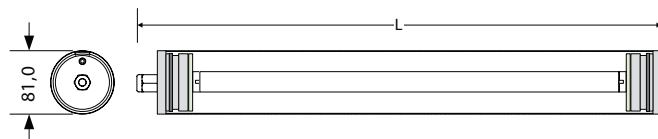

IT - DE



RG1

MACADAM

3/4

UGR
<19

CR>80


L70B50
>
50.000

IP67

IK07

CE

EN 60598-1



Ref.	Tamaño Size Dimension	Potencia Power Puissance	Emisión bruta Gross output Flux de la source	Emisión neta Net output Flux sortant	Tª color Tª colour Tª couleur	Largo Length Longueur	Ancho Wide Large	Ancho con brida Width with clamp Largeur avec fixations	Embalaje Packaging Emballage
			(W)	(Lm)	(Lm)	(°K)	(mm)	(mm)	(mm)
OR113	600	13	1490	1040	3000	770	81	113	1
OR114	600	13	1550	1082	4000	770	81	113	1
OR123	600	16	2560	1787	3000	770	81	113	1
OR124	600	16	2670	1864	4000	770	81	113	1
OR213	1200	24	2980	2080	3000	1380	81	113	1
OR214	1200	24	3200	2234	4000	1380	81	113	1
OR223	1200	32	5120	3574	3000	1380	81	113	1
OR224	1200	32	5340	3727	4000	1380	81	113	1
OR313	1500	29	3720	2597	3000	1633	81	113	1
OR314	1500	29	4000	2792	4000	1633	81	113	1
OR323	1500	40	6310	4404	3000	1633	81	113	1
OR324	1500	40	6700	4677	4000	1633	81	113	1

1.17


ORION



BAJAS TEMPERATURAS
LOW TEMPERATURES
BASSES TEMPÉRATURES




-40°C



Ref.	Tamaño Size Dimension	Potencia Power Puissance	Emisión bruta Gross output Flux de la source	Emisión neta Net output Flux sortant	Tª color Tª colour Tª couleur	Largo Length Longueur	Ancho Wide Large	Ancho con brida Width with clamp Largeur avec fixations	Embalaje Packaging Emballage
		(W)	(Lm)	(Lm)	(°K)	(mm)	(mm)	(mm)	
OC123	600	32	4300	3000	3000	770	81	113	1
OC124	600	32	4600	3200	4000	770	81	113	1
OC223	1200	64	8600	6000	3000	1380	81	113	1
OC224	1200	64	9000	6300	4000	1380	81	113	1
OC323	1500	80	10750	7500	3000	1633	81	113	1
OC324	1500	80	11400	8000	4000	1633	81	113	1



RG1	MACADAM 3/4	UGR <19	 CR>80	L70B50 > 50.000	IP67	IK07	CE EN 60598-1
-----	----------------	------------	--	-----------------------	------	------	------------------



ACCESORIOS ORION / ORION ACCESSORIES / ACCESSOIRES ORION



Ref. Q0338

Bridas de acero cincado
Zinc-plated steel clamps
Colliers en acier galvanisé



Ref. Q0347

Bridas de acero inoxidable
Stainless steel clamps
Colliers inox antivandalisme



Ref. Q0348

Bridas de acero inoxidable de apertura rápida
Quick opening stainless steel clamps
Colliers inox de ouverture rapide à grenouillère



Ref. Q0349

Suspensión con cable de acero
Steel cable suspension
Suspension avec câble en acier



Ref. Q0339

Tapas metálicas y racor metálico
Metallic end caps and cable glands
Embouts et presse-étoupes métalliques

LÍNEA CONTINUA
CONTINUOUS LINE CONNECTION
CÂBLAGE TRAVERSANT

3 polos / 3 poles / 3 pôles

Ref. Q0578

5 polos / 5 poles / 5 pôles

Ref. Q0579

1-10
DALI






EMERGENCY
1h / 3h

1.14



FROZEN



Brida
Clamp
Collier



APLICACIONES INDICADAS / SUITABLE APPLICATIONS / APPLICATIONS APPROPRIÉES

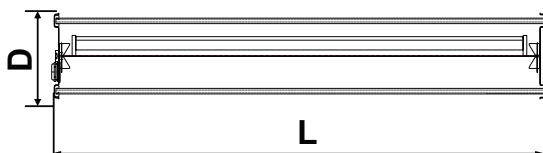

IT - DE




IP68-2

IK07

CE

EN 60598-1



Ref.	Potencia Watts <i>Puissance</i> (W)	L (mm)	D (mm)
Q0953	1x40 W	275	105
Q0954	2x40 W	275	105



-50°C