



Standards: EN 60598-1:2015, EN 60598-2-1:1989, EN 60598-2-2:2012, EN 60529:1992 + A2:2013, EN 55015:2013 + A1:2015, EN 61000-3-2:2014, EN 61000-3-3:2013, EN 61547:2009



Ceiling light fitting equipped with SMD LEDs with housing of die-cast aluminum and fixing clamp of steel, electrostatically painted.

Satin acrylic diffuser.
Constant current LED driver included.

Range of applications

General interior lighting, decorative lighting.

RO

Plafoniere echipate cu LED-uri SMD, cu carcasa din aluminiu turnat și bridă de fixare din oțel, vopsite în câmp electrostatic. Dispersor din acril satinat. Alimentatoare LED în curent constant incluse.

Aplicații

Iluminatul general de interior, iluminatul decorativ.


IT

Plafoniere equipaggiate a LED SMD con corpo in alluminio pressofuso e staffa di fissaggio in acciaio verniciati a polveri. Diffusore in acrilico satinato.

Alimentatori LED in corrente costante incluso.

Campi di applicazione

Iluminazione generale d'interni, illuminazione decorativa.

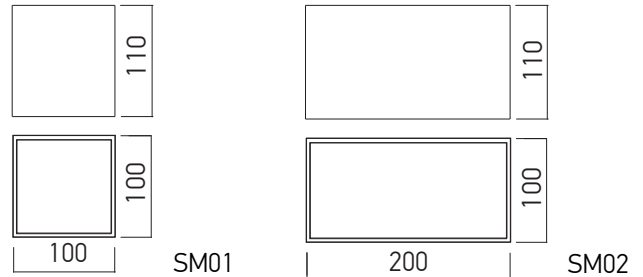

SM01

Code	Finishing	LED type	Power	Input voltage	Output current / Voltage driver	Driver	LED flux	System flux	CCT	CRI	Optics	Weight
SM01WW SWH	SWH	SMD 2835 EPISTAR	10W	110-240V AC	300 mA / 24-42V DC	Included	1200 lm	797 lm	3000K	80	120°	1,00 kg
SM01WW SBK	SBK	SMD 2835 EPISTAR	10W	110-240V AC	300 mA / 24-42V DC	Included	1200 lm	797 lm	3000K	80	120°	1,00 kg
SM01NW SWH	SWH	SMD 2835 EPISTAR	10W	110-240V AC	300 mA / 24-42V DC	Included	1275 lm	847 lm	4000K	80	120°	1,00 kg
SM01NW SBK	SBK	SMD 2835 EPISTAR	10W	110-240V AC	300 mA / 24-42V DC	Included	1275 lm	847 lm	4000K	80	120°	1,00 kg

SM02

Code	Finishing	LED type	Power	Input voltage	Output current / Voltage driver	Driver	LED flux	System flux	CCT	CRI	Optics	Weight
SM02WW SWH	SWH	SMD 2835 EPISTAR	20W	220-240V AC	600 mA / 21-35V DC	Included	2400 lm	1592 lm	3000K	80	120°	2,10 kg
SM02WW SBK	SBK	SMD 2835 EPISTAR	20W	220-240V AC	600 mA / 21-35V DC	Included	2400 lm	1592 lm	3000K	80	120°	2,10 kg
SM02NW SWH	SWH	SMD 2835 EPISTAR	20W	220-240V AC	600 mA / 21-35V DC	Included	2550 lm	1695 lm	4000K	80	120°	2,10 kg
SM02NW SBK	SBK	SMD 2835 EPISTAR	20W	220-240V AC	600 mA / 21-35V DC	Included	2550 lm	1695 lm	4000K	80	120°	2,10 kg

