

xdomino



**EN**

System of fixed light fittings, for interior recessed mounting, composed of modules equipped with COB LEDs electrostatically painted in mat white, gold or mat black.

Recessed frames (to be ordered separately) painted in mat white or mat black for one, two or three modules.

Body of die-cast aluminum, electrostatically painted, heat sink of die-cast aluminum.

Reflector of chromed polycarbonate and clear glass diffuser.

Constant current LED driver has to be ordered separately.

Range of applications

General or accent lighting in commercial areas, museums and other exhibition spaces, residential and recreational areas.

RO

Sistem de corpuri de iluminat fixe, pentru montaj încastrat în interior, compus din module echipate cu LED-uri COB vopsite în câmp electrostatic în variante de culori alb mat, auriu sau negru mat.

Rame de încastrare (comandate separat) vopsite albe mat sau negre mat cu unul, două sau trei posturi.

Corpul din aluminiu turnat, vopsit în câmp electrostatic, radiatorul din aluminiu turnat.

Reflector din policarbonat cromat, dispersor din sticlă clară.

Alimentatorul în curent constant se comandă separat.

Aplicații

Iluminatul general sau de accent în spații comerciale, muzee și alte spații de expunere, zone rezidențiale și zone de agrement.

IT

Sistema di apparecchi fissi da incasso per interni, composto da moduli equipaggiati con LED COB, verniciati a polveri nelle varianti colore bianco opaco, oro o nero opaco.

Cornici da incasso verniciate bianco opaco o nero opaco, da uno, due o tre moduli (da ordinare separatamente).

Corpo in alluminio pressofuso, verniciato a polveri, dissipatore in alluminio pressofuso.

Riflettore in policarbonato cromato, diffusore in vetro trasparente.

Alimentatore a corrente costante da ordinare separatamente.

Campi di applicazione

illuminazione generale o d'accento in musei, spazi espositivi, aree residenziali e ricreative.





xdomino

LED MODULES DM01



FINISHING AVAILABLE

MWH MBK GD



Code	Finishing	LED type	Power	Output current / voltage driver	Driver	LED flux	System flux	CCT	CRI	Optics	⚡	Weight
DM01UWW50 MWH	MWH	COB BRIDGELUX	1x11/15W	500 / 2-24V DC 700 mA / 2-22V DC	Excluded	880 lm / 1200 lm	721 lm / 959 lm	2700K	90	50°	70 x70 mm	0,27 kg
DM01WW50 MWH	MWH	COB BRIDGELUX	1x11/15W	500 / 2-24V DC 700 mA / 2-22V DC	Excluded	908 lm / 1241 lm	746 lm / 988 lm	3000K	90	50°	70 x70 mm	0,27 kg
DM01NW50 MWH	MWH	COB BRIDGELUX	1x11/15W	500 / 2-24V DC 700 mA / 2-22V DC	Excluded	953 lm / 1302 lm	912 lm / 1207 lm	4000K	80	50°	70 x70 mm	0,27 kg
DM01UWW50 BK	MBK	COB BRIDGELUX	1x11/15W	500 / 2-24V DC 700 mA / 2-22V DC	Excluded	880 lm / 1200 lm	721 lm / 959 lm	2700K	90	50°	70 x70 mm	0,27 kg
DM01WW50 BK	MBK	COB BRIDGELUX	1x11/15W	500 / 2-24V DC 700 mA / 2-22V DC	Excluded	908 lm / 1241 lm	746 lm / 988 lm	3000K	90	50°	70 x70 mm	0,27 kg
DM01NW50 BK	MBK	COB BRIDGELUX	1x11/15W	500 / 2-24V DC 700 mA / 2-22V DC	Excluded	953 lm / 1302 lm	912 lm / 1207 lm	4000K	80	50°	70 x70 mm	0,27 kg
DM01UWW50 GD	GD	COB BRIDGELUX	1x11/15W	500 / 2-24V DC 700 mA / 2-22V DC	Excluded	880 lm / 1200 lm	721 lm / 959 lm	2700K	90	50°	70 x70 mm	0,27 kg
DM01WW50 GD	GD	COB BRIDGELUX	1x11/15W	500 / 2-24V DC 700 mA / 2-22V DC	Excluded	908 lm / 1241 lm	746 lm / 988 lm	3000K	90	50°	70 x70 mm	0,27 kg
DM01NW50 GD	GD	COB BRIDGELUX	1x11/15W	500 / 2-24V DC 700 mA / 2-22V DC	Excluded	953 lm / 1302 lm	912 lm / 1207 lm	4000K	80	50°	70 x70 mm	0,27 kg

RECOMMENDED CC DRIVERS 500 mA





RECOMMENDED CC DRIVERS 700 mA



FRAMES DM01

FINISHING AVAILABLE

MWH MBK

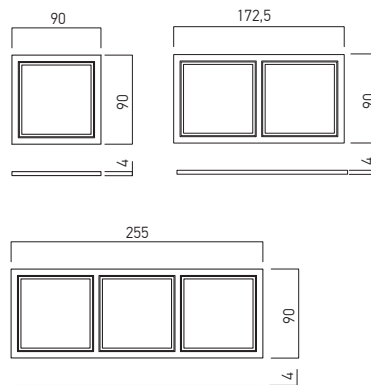
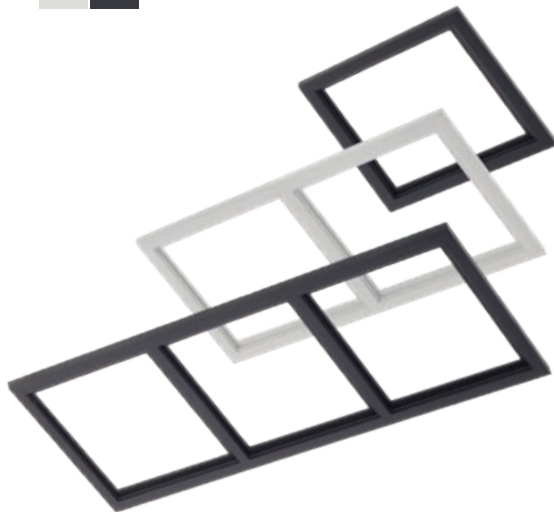


Code	Finishing	Description
DMM1 MWH	MWH	White frame for 1 LED module DM01 model
DMM2 MWH	MWH	White frame for 2 LED module DM01 model
DMM3 MWH	MWH	White frame for 3 LED module DM01 model
DMM1 BK	MBK	Black frame for 1 LED module DM01 model
DMM2 BK	MBK	Black frame for 2 LED module DM01 model
DMM3 BK	MBK	Black frame for 3 LED module DM01 model

LED MODULES DM02

FINISHING AVAILABLE

MWH MBK GD



Code	Finishing	LED type	Power	Output current /voltage driver	Driver	LED flux	System flux	CCT	CRI	Optics	Weight
DM02UWW36 MWH	MWH	COB BRIDGELUX	1x6,2/8,9W	350 / 2-20V DC 500 mA / 2-20V DC	Excluded	600 lm / 820 lm	541 lm / 708 lm	2700K	90	36°	50x50 mm 0,15 kg
DM02WW36 MWH	MWH	COB BRIDGELUX	1x6,2/8,9W	350 / 2-20V DC 500 mA / 2-20V DC	Excluded	618 lm / 848 lm	554 lm / 729 lm	3000K	90	36°	50x50 mm 0,15 kg
DM02NW36 MWH	MWH	COB BRIDGELUX	1x6,2/8,9W	350 / 2-20V DC 500 mA / 2-20V DC	Excluded	655 lm / 899 lm	607 lm / 798 lm	4000K	90	36°	50x50 mm 0,15 kg
DM02UWW36 BK	MBK	COB BRIDGELUX	1x6,2/8,9W	350 / 2-20V DC 500 mA / 2-20V DC	Excluded	600 lm / 820 lm	541 lm / 708 lm	2700K	90	36°	50x50 mm 0,15 kg
DM02WW36 BK	MBK	COB BRIDGELUX	1x6,2/8,9W	350 / 2-20V DC 500 mA / 2-20V DC	Excluded	618 lm / 848 lm	554 lm / 729 lm	3000K	90	36°	50x50 mm 0,15 kg
DM02NW36 BK	MBK	COB BRIDGELUX	1x6,2/8,9W	350 / 2-20V DC 500 mA / 2-20V DC	Excluded	655 lm / 899 lm	607 lm / 798 lm	4000K	90	36°	50x50 mm 0,15 kg
DM02UWW36 GD	GD	COB BRIDGELUX	1x6,2/8,9W	350 / 2-20V DC 500 mA / 2-20V DC	Excluded	600 lm / 820 lm	541 lm / 708 lm	2700K	90	36°	50x50 mm 0,15 kg
DM02WW36 GD	GD	COB BRIDGELUX	1x6,2/8,9W	350 / 2-20V DC 500 mA / 2-20V DC	Excluded	618 lm / 848 lm	554 lm / 729 lm	3000K	90	36°	50x50 mm 0,15 kg
DM02NW36 GD	GD	COB BRIDGELUX	1x6,2/8,9W	350 / 2-20V DC 500 mA / 2-20V DC	Excluded	655 lm / 899 lm	607 lm / 798 lm	4000K	90	36°	50x50 mm 0,15 kg

RECOMMENDED CC DRIVERS 350 mA





RECOMMENDED CC DRIVERS 500 mA



FRAMES DM02

FINISHING AVAILABLE

MWH MBK

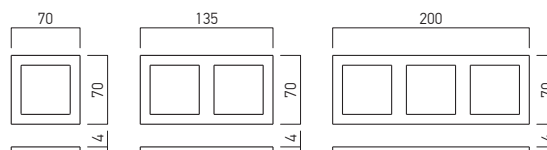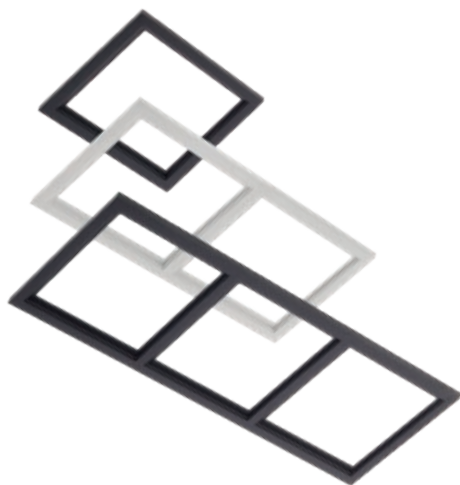

Code	Finishing	Description
DMS1 MWH	MWH	White frame for 1 LED module DM02 model
DMS2 MWH	MWH	White frame for 2 LED module DM02 model
DMS3 MWH	MWH	White frame for 3 LED module DM02 model
DMS1 BK	MBK	Black frame for 1 LED module DM02 model
DMS2 BK	MBK	Black frame for 2 LED module DM02 model
DMS3 BK	MBK	Black frame for 3 LED module DM02 model