

# xvector

**5 YEARS WARRANTY**

Standards: EN 60598-1:2015, EN 60598-2-2:2012, EN 62493:2015, EN 62471:2008, EN 62031:2008 + A2:2015, EN 60529:1992 + A2:2013, EN 55015:2013 + A1:2015, EN 61000-3-2:2014, EN 61000-3-3:2013, EN 61547:2009

**EN**

Family of orientable recessed projectors, with adjustable height, equipped with Power LEDs. For trimless or normal (rim) installation in plasterboard dropped ceilings.

Recessed structure of aluminum, electrostatically painted.

Housing of projector in extruded aluminum profile, electrostatically painted. High-gloss faceted plastic reflector. Diffuser of clear polycarbonate.

Constant current LED driver delivered with the luminaire.

**Range of applications**

Lighting for the small shops, hotels, museums or other exhibition areas. General interior lighting.

**RO**

Familie de proiectoare încastrate orientabile, cu înălțime reglabilă, echipate cu LED-uri de putere.

Se montează în tavane din gipscarton, cu profilul fără ramă vizibilă sau normal, cu ramă de încastare.

Structură de încastare din aluminiu vopsită în câmp electrostatic.

Corpul proiectoarelor din profil extrudat de aluminiu, vopsit în câmp electrostatic. Reflectoare din plastic oglindat și fațetat. Dispersoare din policarbonat clar. Alimentator LED în curent constant livrat împreună cu corpul de iluminat.

**Aplicații**

Iluminat spațiilor comerciale, hotelurilor, muzeelor sau al altor spații de expunere de mici dimensiuni.

Iluminat general de interior.

**IT**

Famiglia di proiettori orientabili da incasso, con altezza regolabile, equipaggiati con LED di potenza.

Si installano su controsoffitti in cartongesso, a filo o normale con cornice da incasso visibile.

Struttura da incasso in alluminio verniciata a polveri.

Corpo del proiettore in profilo estruso di alluminio, verniciato a polveri.

Riflettori in plastica specchiata e sfaccettato.

Diffusori in policarbonato trasparente.

Alimentatore LED a corrente costante fornito con l'apparecchio.


**Campi di applicazione**

Illuminazione per negozi, alberghi, musei o altre piccole aree espositive. Illuminazione generale di interni.

**VT01 RECESSED TRIMLESS**

FINISHING AVAILABLE


MWH MBK

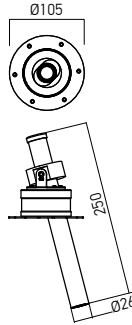

**VT02 RECESSED TRIMLESS**

FINISHING AVAILABLE

MWH MBK

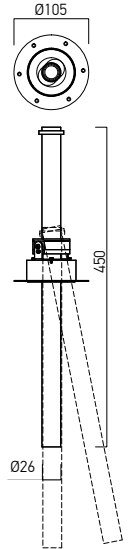


Code	Finishing	LED type	Power	Input voltage	Output current / voltage driver	Driver	LED flux	System flux	CCT	CRI	Optics	Ø	Weight
VT01UWH MWH	MWH	POWER LED CREE	9W	220-240V AC	700 mA / 6-12V DC	Included	760 lm	662 lm	2700K	90	18°	Ø75mm	0,57 kg
VT01UWH MBK	MBK	POWER LED CREE	9W	220-240V AC	700 mA / 6-12V DC	Included	790 lm	679 lm	3000K	90	18°	Ø75mm	0,57 kg
VT01UWH MBK	MBK	POWER LED CREE	9W	220-240V AC	700 mA / 6-12V DC	Included	760 lm	662 lm	2700K	90	18°	Ø75mm	0,57 kg
VT01UWH MBK	MBK	POWER LED CREE	9W	220-240V AC	700 mA / 6-12V DC	Included	790 lm	679 lm	3000K	90	18°	Ø75mm	0,57 kg
VT02UWH MWH	MWH	POWER LED CREE	9W	220-240V AC	700 mA / 6-12V DC	Included	760 lm	662 lm	2700K	90	18°	Ø75mm	0,64 kg
VT02UWH MBK	MBK	POWER LED CREE	9W	220-240V AC	700 mA / 6-12V DC	Included	790 lm	679 lm	3000K	90	18°	Ø75mm	0,64 kg
VT02UWH MBK	MBK	POWER LED CREE	9W	220-240V AC	700 mA / 6-12V DC	Included	760 lm	662 lm	2700K	90	18°	Ø75mm	0,64 kg
VT02UWH MBK	MBK	POWER LED CREE	9W	220-240V AC	700 mA / 6-12V DC	Included	790 lm	679 lm	3000K	90	18°	Ø75mm	0,64 kg

**VT03 RECESSED**

FINISHING AVAILABLE


MWH MBK

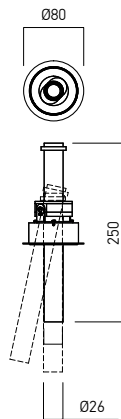

**VT04 RECESSED**

FINISHING AVAILABLE

MWH MBK

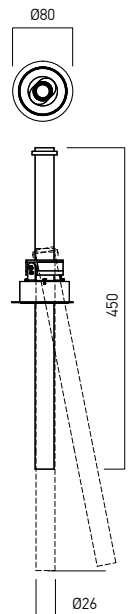

Code	Finishing	LED type	Power	Input voltage	Output current / voltage driver	Driver	LED flux	System flux	CCT	CRI	Optics	Ø	Weight
VT03UWH MWH	MWH	POWER LED CREE	9W	220-240V AC	700 mA / 6-12V DC	Included	760 lm	662 lm	2700K	90	30°	Ø75mm	0,55 kg
VT03UWH MBK	MBK	POWER LED CREE	9W	220-240V AC	700 mA / 6-12V DC	Included	790 lm	679 lm	3000K	90	30°	Ø75mm	0,55 kg
VT03UWH MBK	MBK	POWER LED CREE	9W	220-240V AC	700 mA / 6-12V DC	Included	760 lm	662 lm	2700K	90	30°	Ø75mm	0,55 kg
VT03UWH MBK	MBK	POWER LED CREE	9W	220-240V AC	700 mA / 6-12V DC	Included	790 lm	679 lm	3000K	90	30°	Ø75mm	0,55 kg
VT04UWH MWH	MWH	POWER LED CREE	9W	220-240V AC	700 mA / 6-12V DC	Included	760 lm	662 lm	2700K	90	30°	Ø75mm	0,62 kg
VT04UWH MBK	MBK	POWER LED CREE	9W	220-240V AC	700 mA / 6-12V DC	Included	790 lm	679 lm	3000K	90	30°	Ø75mm	0,62 kg
VT04UWH MBK	MBK	POWER LED CREE	9W	220-240V AC	700 mA / 6-12V DC	Included	760 lm	662 lm	2700K	90	30°	Ø75mm	0,62 kg
VT04UWH MBK	MBK	POWER LED CREE	9W	220-240V AC	700 mA / 6-12V DC	Included	790 lm	679 lm	3000K	90	30°	Ø75mm	0,62 kg

