

WL01/02/03/04/05/06

5 YEARS WARRANTY

Standards: EN 60598-1:2009+A11:2009, EN 60598-2-1:2007 EN60529:1992, EN 62031:2008.

EN

Series of waterproof wall lamps (IP65), for architectural lighting, direct or direct/indirect distribution of the luminous flux, equipped with power LEDs. Body of die-cast aluminium electrostatically painted in dark grey. Silicone gaskets. Polycarbonate lenses. Transparent glasses diffusers. Constant current LED driver included.

Range of applications

Exterior decorative lighting, especially for building facades.

RO

Serie de aplică etanșe (IP65) pentru iluminat arhitectural, cu distribuție directă sau direct/indirectă a fluxului luminos LED-uri de putere. Corpul din aluminiu turnat, vopsit în câmp electrostatic, culoare gri închis. Garnituri de etanșare din silicon. Lentile din policarbonat. Dispersoare din sticlă transparentă. Alimentator în curent constant inclus.

Aplicații

Iluminatul decorativ de exterior, în particular fațade ale clădirilor.

IT

Serie di appliques stagne (IP65) per l'illuminazione architettonica, con distribuzione diretta o diretta/indiretta del flusso luminoso dotate di LED di potenza. Corpo in alluminio pressofuso verniciato a polveri, grigio scuro. Guarnizioni in silicone. Lenti in policarbonato. Diffusori in vetro trasparente. Alimentatore in corrente costante incluso.

Campi di applicazione


Illuminazione decorativa esterna, in particolare facciate di edifici.



WL01

FINISHING AVAILABLE


DG



WL02

FINISHING AVAILABLE

DG

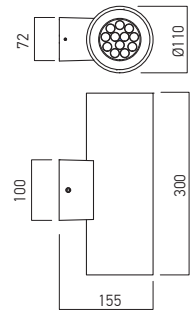


| Code | Finishing | LED type | Power | Input voltage | Dimer | LED flux | System flux | CCT | CRI | Optics | Weight |
|-------------|-----------|-----------------|---------------|---------------|----------|-------------|-------------|-------|-----|--------|---------|
| WL01NW12 DG | DG | POWER LED OSRAM | 12x1,2W | 220-240V AC | Included | 1620 lm | 1025 lm | 4000K | 80 | 12° | 1,41 kg |
| WL01NW30 DG | DG | POWER LED OSRAM | 12x1,2W | 220-240V AC | Included | 1620 lm | 864 lm | 4000K | 80 | 30° | 1,41 kg |
| WL02NW12 DG | DG | POWER LED OSRAM | 2 x (12x1,2W) | 220-240V AC | Included | 2 x 1620 lm | 2 x 1025 lm | 4000K | 80 | 12° | 2,65 kg |
| WL02NW30 DG | DG | POWER LED OSRAM | 2 x (12x1,2W) | 220-240V AC | Included | 2 x 1620 lm | 2 x 864 lm | 4000K | 80 | 30° | 2,65 kg |

WL03

FINISHING AVAILABLE


DG







WL04

FINISHING AVAILABLE

DG

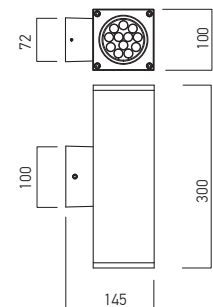


| Code | Finishing | LED type | Power | Input voltage | Dimer | LED flux | System flux | CCT | CRI | Optics | Weight |
|-------------|-----------|-----------------|---------------|---------------|----------|-------------|-------------|-------|-----|--------|---------|
| WL03NW12 DG | DG | POWER LED OSRAM | 12x1,2W | 220-240V AC | Included | 1620 lm | 1025 lm | 4000K | 80 | 12° | 1,65 kg |
| WL03NW30 DG | DG | POWER LED OSRAM | 12x1,2W | 220-240V AC | Included | 1620 lm | 864 lm | 4000K | 80 | 30° | 1,65 kg |
| WL04NW12 DG | DG | POWER LED OSRAM | 2 x (12x1,2W) | 220-240V AC | Included | 2 x 1620 lm | 2 x 1025 lm | 4000K | 80 | 12° | 2,91 kg |
| WL04NW30 DG | DG | POWER LED OSRAM | 2 x (12x1,2W) | 220-240V AC | Included | 2 x 1620 lm | 2 x 864 lm | 4000K | 80 | 30° | 2,91 kg |

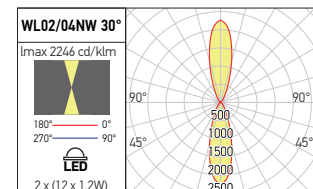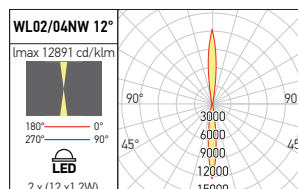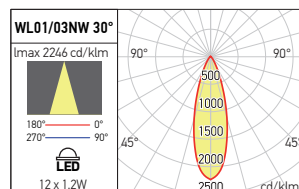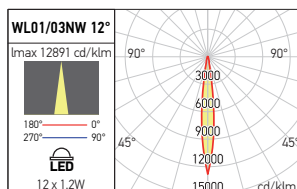

WL05

FINISHING AVAILABLE

DG

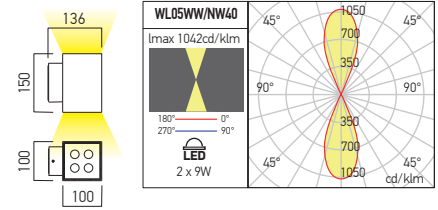


| Code | Finishing | LED type | Power | Input voltage | Driver | LED flux | System flux | CCT | CRI | Optics | Weight |
|-------------|-----------|----------------|-------|---------------|----------|----------|-------------|-------|-----|--------|---------|
| WL05WW40 DG | DG | POWER LED CREE | 2x9W | 100-240V AC | Included | 2016 lm | 1537 lm | 3000K | 80 | 40° | 1,70 kg |
| WL05NW40 DG | DG | POWER LED CREE | 2x9W | 100-240V AC | Included | 2168 lm | 1653 lm | 4000K | 80 | 40° | 1,70 kg |

WL06

FINISHING AVAILABLE

DG

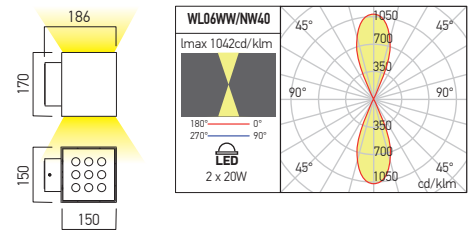

| Code | Finishing | LED type | Power | Input voltage | Driver | LED flux | System flux | CCT | CRI | Optics | Weight |
|-------------|-----------|----------------|-------|---------------|----------|----------|-------------|-------|-----|--------|---------|
| WL06WW40 DG | DG | POWER LED CREE | 2x20W | 220-240V AC | Included | 3742 lm | 2853 lm | 3000K | 80 | 40° | 3,30 kg |
| WL06NW40 DG | DG | POWER LED CREE | 2x20W | 220-240V AC | Included | 4024 lm | 3068 lm | 4000K | 80 | 40° | 3,30 kg |