

xwall

5 YEARS
WARRANTY



EN

Series of waterproof wall lamps (IP65), for architectural lighting, direct or direct/indirect distribution of the luminous flux, equipped with power LEDs.

Body of die-cast aluminium electrostatically painted in dark grey. Silicone gaskets.

Polycarbonate lenses.

Transparent glasses diffusers.

Constant current LED driver included.

Range of applications

Exterior decorative lighting, especially for building facades.

RO

Serie de aplică etanșe (IP65) pentru iluminat arhitectural, cu distribuție directă sau direct/indirectă a fluxului luminos LED-uri de putere.

Corpul din aluminiu turnat, vopsit în câmp electrostatic, culoare gri închis.

Garnituri de etanșare din silicon.

Lentile din policarbonat.

Dispersoare din sticlă transparentă.

Alimentator în curent constant inclus.

Aplicații

Iluminatul decorativ de exterior, în particular fațade ale clădirilor.

IT

Serie di appliques stagne (IP65) per l'illuminazione architettonica, con distribuzione diretta o diretta/indiretta del flusso luminoso dotate di LED di potenza.

Corpo in alluminio pressofuso verniciato a polveri, grigio scuro.

Guarnizioni in silicone.

Lenti in policarbonato.

Diffusori in vetro trasparente.

Alimentatore in corrente costante incluso.

Campi di applicazione


Illuminazione decorativa esterna, in particolare facciate di edifici.



WL01

FINISHING AVAILABLE


DG



WL02

FINISHING AVAILABLE

DG




Code	Finishing	LED type	Power	Input voltage	Driver	LED flux	System flux	CCT	CRI	Optics	Weight
WL01NW12 DG	DG	POWER LED OSRAM	12x1,2W	220-240V AC	Included	1620 lm	1025 lm	4000K	80	12°	1,41 kg
WL01NW30 DG	DG	POWER LED OSRAM	12x1,2W	220-240V AC	Included	1620 lm	864 lm	4000K	80	30°	1,41 kg
● WL02NW12 DG	DG	POWER LED OSRAM	2 x (12x1,2W)	220-240V AC	Included	2 x 1620 lm	2 x 1025 lm	4000K	80	12°	2,65 kg
WL02NW30 DG	DG	POWER LED OSRAM	2 x (12x1,2W)	220-240V AC	Included	2 x 1620 lm	2 x 864 lm	4000K	80	30°	2,65 kg

● ORDERED UPON REQUEST / DISPONIBIL DOAR LA COMANDĂ / DISPONIBILE SOLO SU ORDINAZIONE

WL03

FINISHING AVAILABLE


DG



WL04





FINISHING AVAILABLE

DG



Code	Finishing	LED type	Power	Input voltage	Driver	LED flux	System flux	CCT	CRI	Optics	Weight
● WL03NW12 DG	DG	POWER LED OSRAM	12x1,2W	220-240V AC	Included	1620 lm	1025 lm	4000K	80	12°	1,65 kg
WL03NW30 DG	DG	POWER LED OSRAM	12x1,2W	220-240V AC	Included	1620 lm	864 lm	4000K	80	30°	1,65 kg
WL04NW12 DG	DG	POWER LED OSRAM	2 x (12x1,2W)	220-240V AC	Included	2 x 1620 lm	2 x 1025 lm	4000K	80	12°	2,91 kg
WL04NW30 DG	DG	POWER LED OSRAM	2 x (12x1,2W)	220-240V AC	Included	2 x 1620 lm	2 x 864 lm	4000K	80	30°	2,91 kg

● ORDERED UPON REQUEST / DISPONIBIL DOAR LA COMANDĂ / DISPONIBILE SOLO SU ORDINAZIONE



xwall


**5 YEARS
WARRANTY**



WL05

FINISHING AVAILABLE

DG

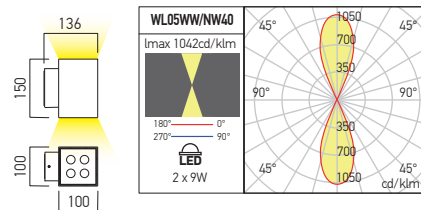


Code	Finishing	LED type	Power	Input voltage	Driver	LED flux	System flux	CCT	CRI	Optics	Weight
WL05WW40 DG	DG	POWER LED CREE	2x9W	100-240V AC	Included	2016 lm	1537 lm	3000K	80	40°	1,70 kg
WL05NW40 DG	DG	POWER LED CREE	2x9W	100-240V AC	Included	2168 lm	1653 lm	4000K	80	40°	1,70 kg

WL06

FINISHING AVAILABLE

DG

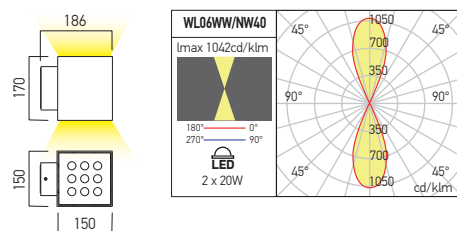

Code	Finishing	LED type	Power	Input voltage	Driver	LED flux	System flux	CCT	CRI	Optics	Weight
WL06WW40 DG	DG	POWER LED CREE	2x20W	220-240V AC	Included	3742 lm	2853 lm	3000K	80	40°	3,30 kg
WL06NW40 DG	DG	POWER LED CREE	2x20W	220-240V AC	Included	4024 lm	3068 lm	4000K	80	40°	3,30 kg