


Categorie	Optical cable reel	Cable colour	Alb
No. optical fibers	8	Lungimea	500 m
Ø sheath	3 mm	Utilizare	Interior
Clasificare	G.657.A2 / B6_a2 Bend Insensitive	Ø core	9 µm
Ø cladding	125 µm	Strength member	Kevlar
Outer jacket	LSZH	Cablu	Loose - OS2
CPR class	Eca	Tension	100 N
Crush	500 N/10cm	Minimum bend radius (Dynamic)	20x cable diameter
Minimum bend radius (Static)	10x cable diameter	Max attenuation (@1310 nm / @1550 nm)	0.35 dB/Km (@1310 nm) / 0.2 dB/Km (@1550 nm)
Temperatură de funcționare	From -20°C to +60°C		

DIMENSIONAL



STANDARDS/APPROVALS

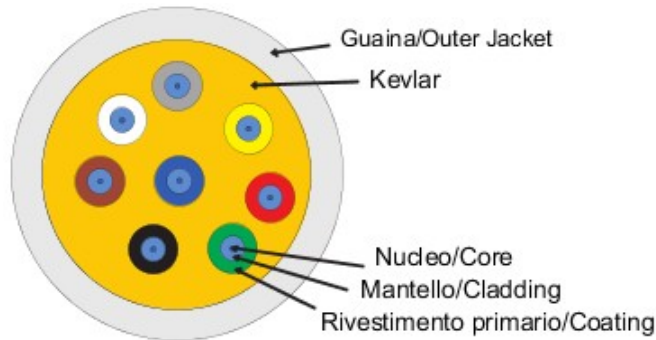

GEWISS S.p.A. Via A. Volta, 1
24069 Cenate Sotto - Bergamo - Italy
tel. +39 035 94 61 11 fax +39 035 94 69 09

www.gewiss.com
sat@gewiss.com
Last update 19/08/2021

Data, measures, designs and pictures are shown only as informative purposes, and could be changed without previous notice