




The IP40 protected decorative enclosures are available in sizes from 8 to 72M. They provide superior aesthetic integration. They are available with smoked transparent doors or with blank doors that can be equipped with safety lock, characterized by the "PUSH" opening and closing. They can be equipped with bipolar and unipolar terminal blocks, 80 A and 125 A, with screw wiring; they allow to create simple and neat wiring reducing the set-up time of the enclosure.


Clasă izolație	II (conform standardelor IEC 61140)	Culoare	Alb RAL 9016
Dim. exterioare LxHxP (mm)	280x350x100	Clasă de protecție IP	IP40
Putere disipabilă (W)	25	Cod IK	IK08
Tensiune nominală	400 V	Culoare ușă	Modul orb
Nr. module EN 50022	24 (12X2)	Curent nominal	125 A
Glow Test conductori	650 °C	Temperatură de operare	-25 +60 °C
Tip de material	Fără halogen conform EN 60754-2	Electrocod	0321
Termo-presiune cu bilă	70 °C	Accesorii pentru restabilirea izolației	Capete de șuruburi (GW44623) sau console de fixare în rășină (GW44621)
Standard	EN 60670-1 (CEI 23-48) IEC60670-24 CEI 23-49	Tensiune izolație	750 V
Nr. maxim blocuri terminale instalabile	2 x 12 module		



### DIMENSIONAL

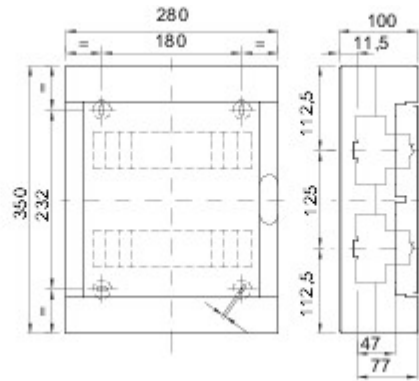

### TECHNICAL SYMBOLOGY



**IP**

IP40

**IK**

IK08


**GWT**

650 °C



**HF**  
HALOGEN FREE

Fără halogen  
conform EN 60754-2



### STANDARDS/APPROVALS

