




The range of IP40 protected flush mounting enclosures offers sizes from 2 to 72 modules, available with a smoked transparent door (particularly suitable for the commercial and industrial sector) or a blank door (ideal for domestic application). They can be equipped with bipolar and unipolar terminal blocks, 80 A and 125 A, with screw wiring; they allow to create simple and neat wiring reducing the set-up time of the enclosure.

| | | | |
|---|--|------------------------|---------------------------------|
| Clasă izolație | II (conform standardelor IEC 61140) | Culoare | Alb RAL 9016 |
| Dim. exterioare LxHxP (mm) | 465x310x85 | Clasă de protecție IP | IP40 |
| Instalare | Cu montaj îngropat | Putere disipabilă (W) | 50 |
| Cod IK | IK08 | Tensiune nominală | 400 V |
| Culoare ușă | Transparent fumuriu | Nr. module EN 50022 | 18 |
| Curent nominal | 125 A | Glow Test conductori | 650 °C |
| Temperatură de operare | -15 +60 °C | Tip de material | Fără halogen conform EN 60754-2 |
| Electrocod | 0311 | Termo-presiune cu bilă | 70 °C |
| Standard | EN 60670-1 (CEI 23-48) IEC60670-24 CEI 23-49 | Tensiune izolație | 750 V |
| Nr. maxim blocuri terminale instalabile | 1 x 18 module | | |




DIMENSIONAL

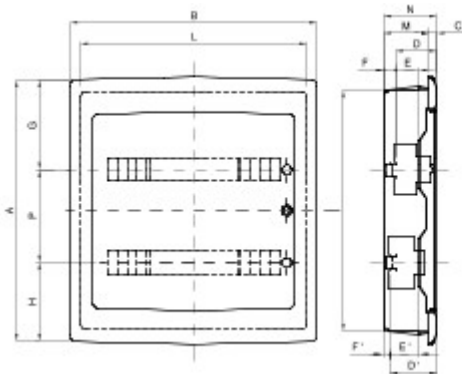

| | | A | B | C | N | D | E | F | G | H | P | D | E' | F' | I | L | M |
|-----|-----------|-----|-----|----|-----|----|----|----|-----|-----|-----|-----|----|----|-----|-----|----|
| 24M | GW 40 606 | 420 | 330 | 16 | 101 | 75 | 48 | 17 | 148 | 122 | 60 | - | - | - | 380 | 290 | 85 |
| | GW 40 886 | | | | | | | | | | | | | | | | |
| 36M | GW 40 609 | 505 | 465 | 16 | 101 | 75 | 48 | 17 | 175 | 155 | 175 | - | - | - | 465 | 427 | 85 |
| | GW 40 889 | | | | | | | | | | | | | | | | |
| 54M | GW 40 610 | 680 | 465 | 25 | 120 | 75 | 48 | 37 | 175 | 155 | 175 | 101 | 74 | 11 | 630 | 415 | 95 |
| | GW 40 890 | | | | | | | | | | | | | | | | |
| 72M | GW 40 611 | 880 | 465 | 25 | 120 | 75 | 48 | 37 | 175 | 155 | 175 | 101 | 74 | 11 | 805 | 415 | 95 |
| | GW 40 891 | | | | | | | | | | | | | | | | |

TECHNICAL SYMBOLOGY




IP
IP40

IK
IK08

GWT
650 °C



HF
HALOGEN FREE
Fără halogen conform EN 60754-2



STANDARDS/APPROVALS

