




The range of IP40 protected flush mounting enclosures offers sizes from 2 to 72 modules, available with a smoked transparent door (particularly suitable for the commercial and industrial sector) or a blank door (ideal for domestic application). They can be equipped with bipolar and unipolar terminal blocks, 80 A and 125 A, with screw wiring; they allow to create simple and neat wiring reducing the set-up time of the enclosure.

Clasă izolație	II (conform standardelor IEC 61140)	Culoare	Alb RAL 9016
Dim. exterioare LxHxP (mm)	465x310x85	Clasă de protecție IP	IP40
Instalare	Cu montaj îngropat	Putere disipabilă (W)	50
Cod IK	IK08	Tensiune nominală	400 V
Culoare ușă	Modul orb	Nr. module EN 50022	18
Curent nominal	125 A	Glow Test conductori	650 °C
Temperatură de operare	-15 +60 °C	Tip de material	Fără halogen conform EN 60754-2
Electrocod	0311	Termo-presiune cu bilă	70 °C
Standard	EN 60670-1 (CEI 23-48) IEC60670-24 CEI 23-49	Tensiune izolație	750 V
Nr. maxim blocuri terminale instalabile	1 x 18 module		




DIMENSIONAL

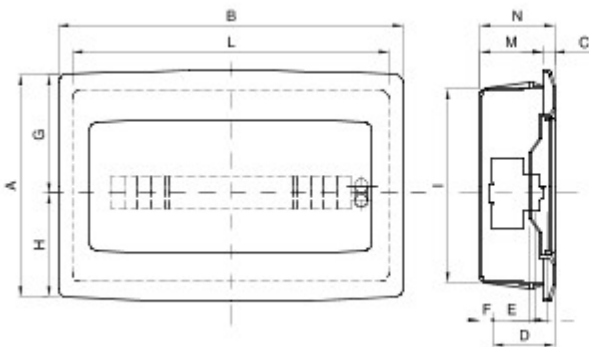

		A	B	C	N	D	E	F	G	H	I	L	M
8M	GW 40 604	193	240	12	97	75	48	14	105	90	162	200	85
	GW 40 884												
12M	GW 40 605	270	330	16	101	75	48	17	118	122	230	290	85
	GW 40 885												
18M	GW 40 608	310	465	16	101	75	48	17	165	145	260	427	85
	GW 40 888												

TECHNICAL SYMBOLOGY



IP

IP40

IK

IK08


GWT

650 °C



HF

Fără halogen
conform EN 60754-2



STANDARDS/APPROVALS

