


On request




Ceiling lamp for indoor environments, can be installed on the wall or ceiling with methacrylate diffuser opal with satin finish. Equipped with bayonet coupling on three reinforced stainless steel supports, it can be mounted on surfaces normally flammable because the temperatures on the assembly plane are below the regulatory limits.

| Aplicație             | Internă                     | Versiune                                  | Standard      |
|-----------------------|-----------------------------|---|---------------|
| Clasă de protecție IP | IP40                        | Cod IK                                    | IK06          |
| Clasă izolație        | I                           | Glow Test conductori                      | 650 °C        |
| Greutate (Kg)         | 2.3                         | Tensiune                                  | 230 V - 50 HZ |
| Lampa tip             | FSQ                         | Putere lampă                              | 13 W          |
| Număr lămpi           | 3                           | Prindere/ Suport Lampă                    | G24d-1        |
| Tip driver            | Reactor electromagnetic KCG | Dimensiuni (mm)                           | Ø 440         |
| Tip Difuzor           | Opal                        | Clasă de eficiență a lămpilor compatibile | B ÷ A         |
| Electrocod            | 2415                        |   |               |

### DIMENSIONAL

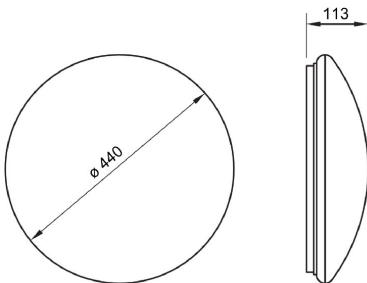

### PHOTOMETRIC DISTRIBUTION

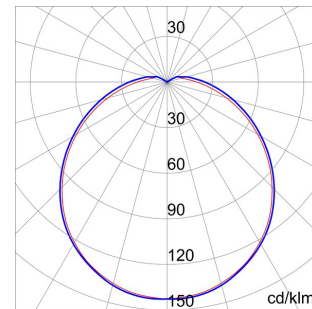

### TECHNICAL SYMBOLOGY



**IP**

IP40

**IK**

IK06



**GWT**

650 °C



KCG

### STANDARDS/APPROVALS

