


Gama POINT




Pole style lighting apparatus for residential areas. Characterized by the shielding of the light source, it hosts LED sources. Available in two different, small sizes (h = 473 mm and 550 mm). Sober and elegant design, with a newly developed internal, transparent diffuser that conveys the light emission towards the ground, optimizing the flux and avoiding upwards light dispersion. The fixing means allow for a fast and safe maintenance.

Putere lampă	4 W	Lampa tip	DR
Prindere/ Suport Lampă	E14	Temperatură de culoare	3000 K
Culoare	BlueGreen	Număr lămpi	1
Glow Test conductori	650 °C	Clasă izolație	II
Clasă de protecție IP	IP55	Cod IK	IK10
Tensiune	230 V - 50 HZ	Aplicație	Exterior
Poluare luminoasă	25%	Clasă de eficiență a LED-urilor integrate	D + A+
Tip sursă de lumină	A+	Garanție	Poate fi extins
Electrocod	2442		

DIMENSIONAL

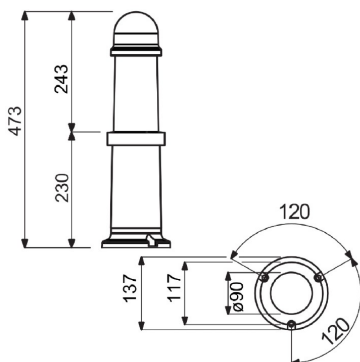

PHOTOMETRIC DISTRIBUTION

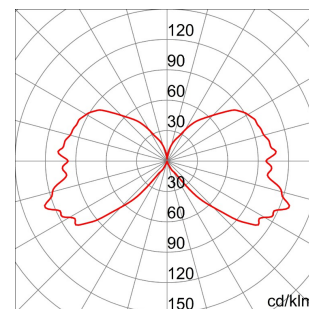

TECHNICAL SYMBOLOGY

GWT
650 °C



IP
IP55

IK
IK10



STANDARDS/APPROVALS

