




A system of command and control wireless devices based on Zigbee technology that offers innovative solutions for the renovation of buildings, minimizing the structural interventions. Zigbee is a safe and reliable system because the data exchanged are encrypted and every node of the network always ensures reachability among all the devices (mesh network). The Zigbee devices enrich the range of home&building automation solutions by Gewiss and can be managed via App, with smartphone and tablet, through the Smart Gateway.

Categorie	Actuator for generic loads	Protocol de comunicații	Zigbee (IEEE 802.15.4)
Tensiune de alimentare	230V ac - 50 Hz	Nr. canale în ieșire	2
Contacte de ieșire	2 NO 6A (AC1) 230 V ac	Output power	8 dBm
Putere max disipabilă (W)	2,3 W	230V incandescent-halogen lamps	1400 W
CFL lamps	150 W	230V LED lamps	150 W
Loads controlled from toroidal transformers	450 W	Loads controlled from electronic transformers	600 W
Putere max motor	500 W	Standard	2014/53/EU
Clasă de protecție IP	IP20	Temperatură de funcționare	-5 ÷ +45 °C
Temperatură de stocare	-25 ÷ +70 °C	Relative humidity (non-condensative)	Max 93%
Dimensiuni LxHxP (mm)	42x40x20	Electrocod	051A

### DIMENSIONAL

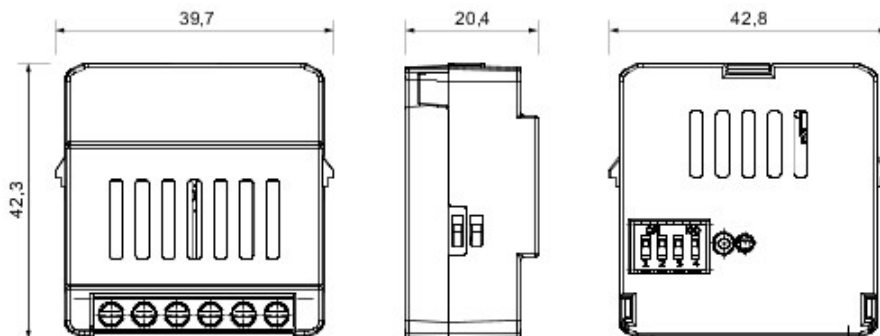

### TECHNICAL SYMBOLOGY

**IP**

IP20

### STANDARDS/APPROVALS

