



ELIA CL - Ceiling LED

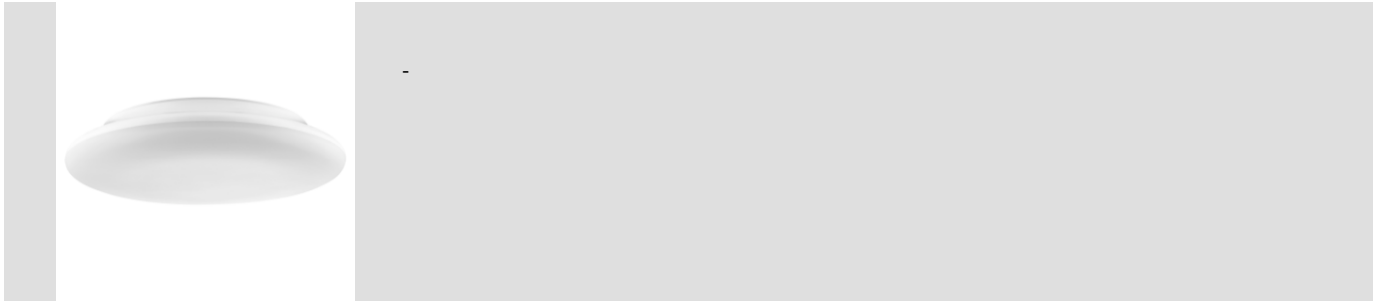


GENERAL INFORMATION		OPTIC AND ILLUMINATING FEATURES	
Context	Office, Stairs and technical rooms	Optică	Wide opal
Luminaire	LED luminaire for diffuse light with emergency	Unified Glare Rating	-
Aplicație	Internă	Lumină ieșire (lm)	2550
Unique digital code (Datamatrix)	Currently not present	Efficiency (lm/W)	102
Culoare	Alb	Culoare Temperatură	4000 K
Tip sursă de lumină	LED - Neînlocuibil	Color Rendering Index	CRI 80
Puterea sistemului	25 W	Standard Deviation Colour Matching	SDCM = 3
LED Lifetime	L80B50 (Tq25°) = 50.000h	Photobiological Risk Class	RG0
Greutate (Kg)	0.8	Standard	-
Garanție	3 ani	ELECTRICAL AND LIGHTING FEATURES	
Temperatură de stocare	-20° +65°	Tensiune de alimentare	220-240 V
Operating temperature	-0° +45°	Frecvență nominală (Hz)	50 / 60
MATERIALS		Driver	Included
Body	Polycarbonate	Driver failure rate	F025 = 50.000h Tq 25°C
Ecran	Polycarbonate	Overvoltage protection	Overvoltage protection 1kV
Optic	-	Control System	PORNIT OPRIT
Gasket	-	INSTALLATION AND MAINTENANCE	
Locking Hook	-	Mouting and installation	Ceiling - Wall
External screw	-	Tilt	-
Colour	PC coloured	Wiring	With connection terminal
STANDARDS AND APPROVALS		Prindere	-
Clasificare	-	Optic Maintenance	Not available
Dispozitiv cu temperatură la suprafață redusă	-	LED Maintenance	Not available
Certificare DIN 18032-3	-	Driver Box	Integrat
IPEA	-	Suprafață maximă expusă la vânt	-
Clasă izolație	II	-	-
Clasă de protecție IP	IP20 - IP54	-	-
Cod IK	IK08	-	-
Glow Test conductori	750 °C	-	-

DIMENSIONAL

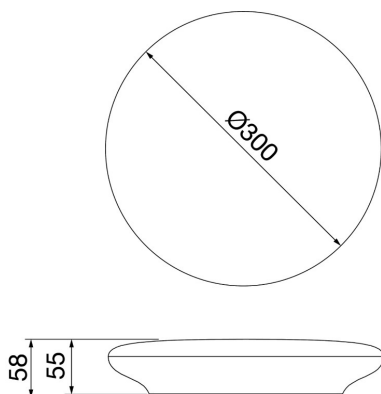

PHOTOMETRIC DISTRIBUTION

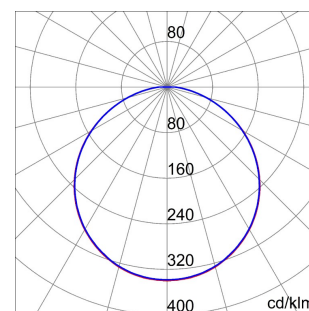

TECHNICAL SYMBOLOGY



IP

IP20 - IP54

IK

IK08

GWT

750 °C

STANDARDS/APPROVALS

Data, measures, designs and pictures are for information purpose only, last update 19/08/2021. They can be changed at any moment, therefore it is always recommended to read the last updated version published on the website www.gewiss.com. Lumen output and system power are subject to a tolerance of +/- 10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C. Terms of warranty at <https://www.gewiss.com/it/en/company/landingpage/led-warranty>. - 1 of 2

ELIA CL - Ceiling LED

